



## HIGH CAPABILITY BOLTING TOOLS



THE DRIVING FORCE IN CRITICAL BOLTING

**HIGH CAP**  
The Most Advanced Coll

Since 1970, **AIMCO** has been providing Global Assembly and Critical Bolting Tooling solutions for the Automotive, Electronics, Aerospace, Energy Services, and General Assembly Industries.

Headquartered in Portland, Oregon, **AIMCO** has become a leading importer and exporter of industrial power tools. **AIMCO** currently exports to over 33 countries including Mexico, Brazil, Germany, France, Korea, China, the UK, India, Denmark, and most recently in Russia.

In 1999, AIMCO began manufacturing its **AcraDyne®** line, which produces a complete line of D/C Controlled Tools and custom built multiple spindle systems. Our service, repair, and calibration labs provide fast turnaround on repairs; additionally, all electronic torque equipment meets NIST standards.

If **Productivity, Ergonomics, Reliability, and Quality** are driving forces in your business, then let **AcraDyne®** be your value-added partner. **AcraDyne®** provides cost effective solutions for our customers by resolving challenges related to tightening and critical bolting strategies, tool selection and installation, joint failure analysis, audit trails, and methods. This, combined with operator training, maximizes the production efficiencies our tools provide.


**AcraDyne®** produces a complete line of D/C Controlled Tools as well as custom built multiple spindle systems ranging from approximately .5 to 12,000 Nm. **All Made in the USA.**

Our strategically located sales force, coupled with our worldwide distribution, make **AcraDyne®** the right choice for you.

**ISO 9001: 2015 Certified**



*The Driving Force in Critical Bolting*

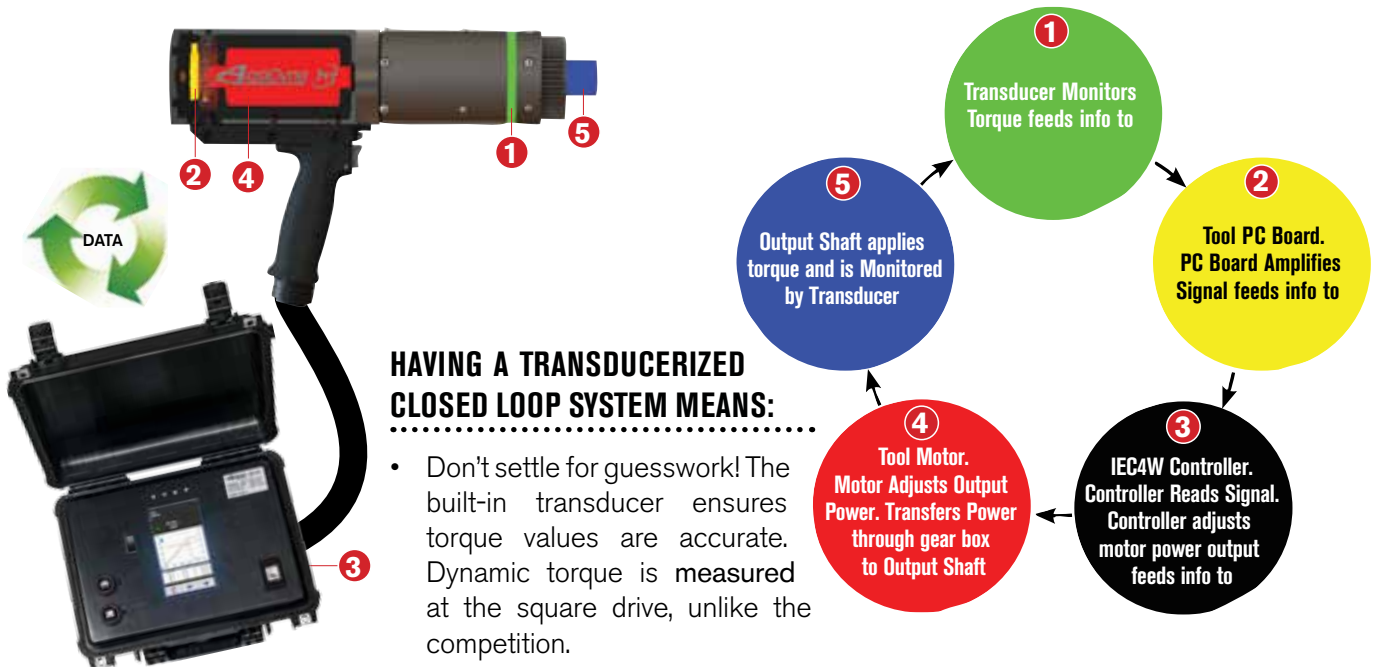

**HAVING A TRANSDUCERIZED CLOSED LOOP SYSTEM MEANS:**

- Don't settle for guesswork! The built-in transducer ensures torque values are accurate. Dynamic torque is measured at the square drive, unlike the competition.
- Torque measurement is not affected by changes in gear efficiency, normal tool wear between calibrations, temperature, voltage, or motor performance.
- On-tool LEDs for Accept/Reject signals.
- The system can easily be verified and calibrated anywhere.
- Interchangeable tools, cables, and controllers – calibrations are specific to the tool not the system as a whole.

**CHOOSE YOUR HANDLE**



# AcraDyne<sup>®</sup> HT HIGH TORQUE DC TOOLS

DC A Division of AIMCO



Critical bolting demands tools that deliver high torque with superior performance. Couple with AcraDyne's Controller, the HT Series tools combine these features in an electric, high-torque bolting system that beats the competition in accuracy, speed, and safety.

## FEATURES AND BENEFITS

- One of the most accurate high-torque tools in the world today
- Up to 100 times faster than hydraulic tools
- 250 Nm – 12,000 Nm
- Ergonomic, robust design with five handle configurations
- Over 300 models to choose from
- Built-in integral transducer for optimal monitoring and control
- The world's ONLY traceable system at the square drive
- Data retrieval
- Designed and **MADE IN THE USA**



Rear Mounted Pistol (AED)



Axial Type (AEJ)



Pistol Type (AEP)



Straight Lever Type (AES)



Fixtured Type (AEF)

FIXED GEARCASE MODEL*	SERIES	APPROX. TORQUE NM	APPROX. TORQUE FT-LB	APPROX. SPEED RPM	WEIGHT KG	WEIGHT LB	LENGTH MM	LENGTH IN	DIA. MM	DIA. IN	DRIVE IN	SOUND LEVEL dB(A)
(AEP) (AED) (AES) (AEJ) (AEF)4A66250B	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A66425B	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A66625B	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A66925B	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A771200B	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A773000B	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A884200B1	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A884200B	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A885000B	8000	5,000	3,700	9	11.1	24.5	340	13.4	86	3.6	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A896500B	8000/9000	6,500	4,800	7	15.7	34.5	378	14.9	101	4.0	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A898100B	8000/9000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
(AEP) (AEJ)4A8X12000B	8000/9000	12,000	8,850	3.5	23.0	51.0	526	21	131	5.2	1.5	66

\* Add "B" to the end of the model number for bottom exit cable (AEF fixtured models only).

# AcraDyne<sup>®</sup> HT HIGH TORQUE DC BOLTING TOOLS

DC A Division of AIMCO



**360° Swivel Gearcase  
AEP4W872800B**



**12,000 NM Torque  
AEJ4B8X12000B**

360° SWIVEL GEARCASE MODEL	SERIES	APPROX. TORQUE		APPROX. SPEED RPM	WEIGHT		LENGTH		DIA.		DRIVE IN	SOUND LEVEL dB(A)
		NM	FT-LB		KG	LB	MM	IN	MM	IN		
(AEP) (AEJ)4B66250B	6000	250	185	315	5.3	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B66425B	6000	425	315	165	5.3	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B66625B	6000	625	460	106	5.5	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B66925B	6000	925	682	72	5.5	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B771200B	7000	1200	885	65	7.3	16	310	12.2	76	3.0	1	66
(AEP) (AEJ)4B773000B	7000	3,000	2,213	25	8.2	18	345	13.6	76	3.0	1	66
(AEP) (AED) (AEJ)4W872800B	8000	2,800	2,065	11	11.8	26	376	14.8	91	3.6	1	66
(AEP) (AEJ)4B884200B1	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1	66
(AEP) (AEJ)4B884200B	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1.5	66
(AEP) (AED) (AEJ)4W884650B	8000	4,650	3,430	9	11.8	26	391	15.4	91	3.6	1.5	66
(AEP) (AEJ)4B885000B	8000	5,000	3,700	9	11.8	26	391	15.4	86	3.6	1.5	66
(AEP) (AEJ)4B896500B	8000/9000	6,500	4,800	7	16.4	36	429	16.9	101	4.0	1.5	66
(AEP) (AED) (AEJ)4W896500B	8000/9000	6,500	4,800	7	16.4	36	429	16.9	104	4.0	1.5	66
(AEP) (AEJ)4B898100B	8000/9000	8,100	6,000	5	16.4	36	429	16.9	101	4.0	1.5	66
(AEP) (AEJ)4B8X12000B	8000/9000	12,000	8,850	3.5	24.0	52.5	564	22	131	5.2	1.5	66

*Providing Unmatched Accuracy*

**FEATURES AND BENEFITS**

- Transducerized closed loop control at the output like all AcraDyne HT-Series tools
- These low-profile head, small-diameter, lever-operated tools, with the torque measured at the output, offer a unique solution
- The torque reported is the torque delivered
- One of the most accurate high-torque right-angle tools in the world
- Smallest tools of their kind on the market
- Same durable, high-cycle gearing as our other HT-series tools
- Models up to 12,000 Nm available upon request



**AEN3571000A**



**AEN356540A**




**AEN3571600A**



**AEN3572600A**

**SPECIFICATIONS**

MODEL	MAX. TORQUE*		TORQUE RANGE		FREE SPEED RPM	WEIGHT		OUTPUT DRIVE
	NM	FT-LB	NM	FT-LB		LB	KG	
AEN356540A	540	398	135 - 540	100 - 398	109	13.1	5.95	3/4" Square Drive
AEN3571000A	1,000	737	250 - 1,000	184 - 737	61	16.3	7.39	1" Square Drive
AEN3571600A	1,600	1,180	400 - 1,600	295 - 1,180	33	16.7	7.57	1" Square Drive
AEN3572600A	2,600	1,917	650 - 2,600	479 - 1,917	21	18.5	8.40	1" Square Drive

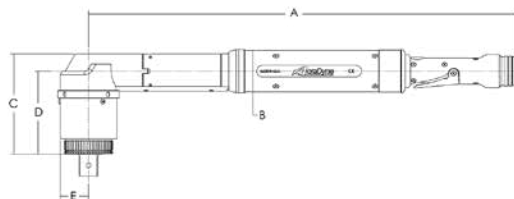

DIMENSIONS	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
AEN356540A	22.58	573.6	2.31	58.7	4.75	120.6	4.05	102.8	1.33	33.7
AEN3571000A	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3571600A	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3572600A	22.92	582.2	2.31	58.7	6.77	171.9	5.86	148.8	1.53	38.7

## DUAL LEVER TOOLS

### FEATURES AND BENEFITS

- Additional safety when using a tool with a reaction bar or nose extension
- Requires both hands to start the tool, keeping hands clear of application
- Helps avoid accidental starting of the tool
- Available in three handle types: "Handle Bar" (F) style, Straight (S) style with side handle, and Pistol (P) style



MODEL* (HANDLE TYPE)	SERIES	APPROX. TORQUE		APPROX. SPEED RPM	WEIGHT		LENGTH		DIA.		DRIVE IN	SOUND LEVEL dB(A)
		NM	FT-LB		KG	LB	MM	IN	MM	IN		
AE(S)(F)(P)4(A)(B)66250	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)66425BDL	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)66625BDL	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)66925BDL	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)771200BDL	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
AE(S)(F)(P)4(A)(B)773000BDL	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
AE(S)(F)(P)4(A)(B)884200B1DL	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
AE(S)(F)(P)4(A)(B)884200BDL	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(S)(F)(P)4(A)(B)885000BDL	8000	5,000	3,700	9	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(S)(F)(P)4(A)(B)896500BDL	8000/9000	6,500	4,800	7	15.7	34.5	378	14.9	101	4.0	1.5	66
AE(S)(F)(P)4(A)(B)898100BDL	8000/9000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
AEF4(A)(B)891200BDL	8000/9000	12,000	8,850	3.5	23.0	51.0	526	21	131	5.2	1.5	66

\* The fifth digit of the model number is "A" for fixed gearcase models and "B" for 360° swivel gearcase models.

- Above data is for 360° swivel gearcase models. For non-clutched models, reduce weight by 1.5 lb (0.7 kg) and length by 2 in (51 mm).

- For Straight Type tools Choose the position of the handle by adding (L) for left side and (R) for right side

## HT GEARHEAD TOOLS

### FEATURES AND BENEFITS

- Custom made to fit virtually any application
- Same durable gearing as found on AcraDyne's standard HT series tools
- Model types available:
  - HT Offset Gearhead tools
  - HT Right Angle with Offset Gearhead tools
  - HT Right Angle Air tools with Offset Gearhead



## NOSE EXTENSIONS

### FEATURES AND BENEFITS

- Ideal for hard-to-reach applications when a torque tube, or arm, is not desirable
- A cost-effective, more flexible option compared to a multiple spindle system
- Common applications:
  - Wheel install and repair stations
  - Large flange assembly
  - Mining vehicle shovel bolts
  - Railway equipment maintenance
  - Oil and gas industry well fixtures





# ACRADYNE® HT SERIES FIELD CONTROLLER

AcraDyne's iEC field controller is reliable, easy to operate, and is self-contained in its own weatherproof, rugged case to protect it from the toughest of environments.

## FEATURES AND BENEFITS

- Multiple fastening strategies – Program up to 256 parameters with as many as 20 steps
- Jobs capability – 99
- Event log – 5,000
- Backup & restore through USB
- Rundown storage – 1,000,000
- Real-time curve viewing. Curve storage – 20,000



iEC4W Model

## CONTROL STRATEGIES (CW OR CCW)

- Torque Control (TC) – Provides target torque with high and low limits with simple pass or fail criteria for tightening threaded fasteners
- Torque Control with Angle Monitoring (TC/AM) – Allows user to monitor angle, rotation, and detect any changes in the joint rate which would indicate process problems
- Torque Monitoring with Angle Control (TM/AC) – Controls the amount of fastener rotation during tightening while also viewing applied torque


MODEL	DESCRIPTION
iEC4W-110V	Field use controller for use with 110VAC input power
iEC4W-220V	Field use controller for use with 220VAC input power

## PERQ Advantages

- PRODUCTIVITY**
  - Increased productivity means increased profits
  - Replace multiple conventional tools with one flexible controlled system
- ERGONOMICS**
  - Compact, rugged case with easy carry handle makes field use easy and convenient.
- RELIABILITY**
  - No guessing, just reliable and accurate bolting
  - Automatically set torque and reduce operator error
  - Collect and analyze production data
- QUALITY**
  - Controlled tightening and consistent torque control improves quality
  - Process controls reduce human error, and ensure no missed fasteners, stripped threads, rehits, or damaged threads
  - No premature shut-off

## SOFTWARE


AcraDyne's software package is on-board every AcraDyne controller and is provided FREE of charge. This comprehensive, user-friendly program allows programming, analysis, and diagnostics.

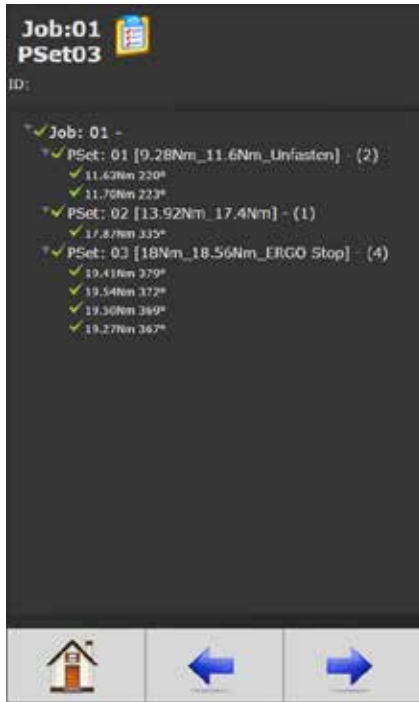


Adding and editing Parameter Sets (256) and Jobs (99) is easy and intuitive in the parameter set up function.



View curve results in real time or view stored results. As many as 20,000 curve results can be stored in memory.

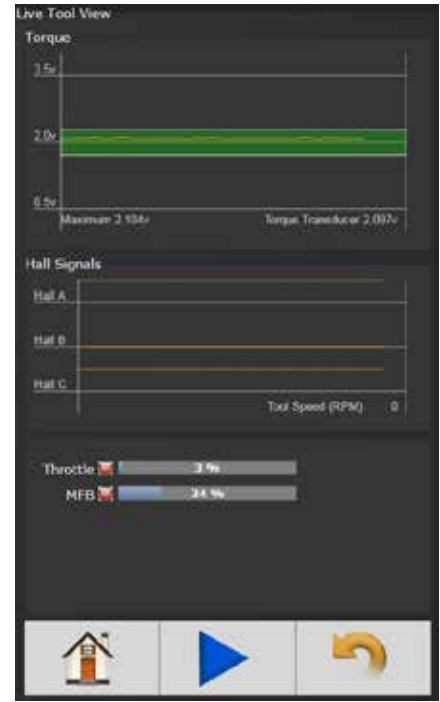

Tool programming and diagnostics for repair, calibration and advanced troubleshooting.

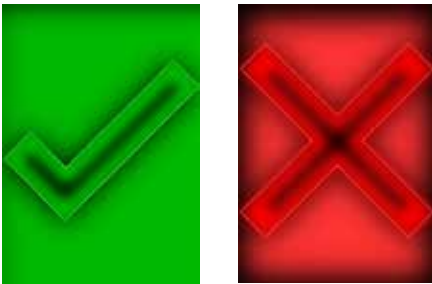

Choose from several run screens that display easy to view, large screen indicators.



**FEATURES AND BENEFITS**

- Battery driven 2-speed torque multiplier for torques from 90 Nm to 4,000 Nm (65 to 2,950 ft-lb)
- Short fastening cycles: Fast gear for run down and power gear for highest torques and precision
- Mobile and always ready for use: Compact design for convenient use in limited spaces or without power supply
- Efficient operation: Fast and easy gear-changing, great torque range – choose from 22 torque values
- Very low susceptibility to damage and failure: Motor housing made of special polymer: Break-proof, impact-proof, and resistant to corrosion
- Intelligent energy management and faster workflow: Electronics protect battery cells from overcharging and depth discharge




**PERQ Advantages**

- PRODUCTIVITY** • Two Lithium-Ion battery packs ensure up to 360 tightenings. Each battery features an LED charge level indicator
- ERGONOMICS** • Low weight relative to the torque delivered.  
• Ergonomically designed.  
• Low noise emissions
- RELIABILITY** • Low-wear brushless, synchronous motor is maintenance free
- QUALITY** • Exact shut-off torque even at low battery levels



Two 18 V, 5.2 Ah lithium-ion battery packs, battery charger, tool case.

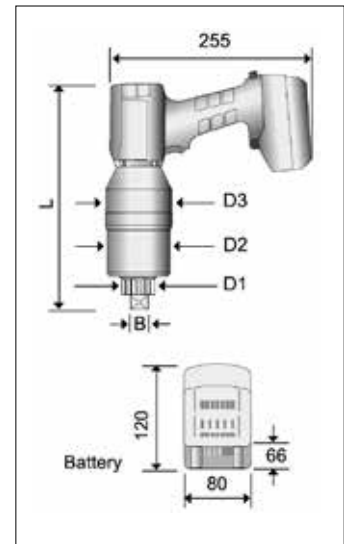

MODEL	TORQUE RANGE*		SO. DRIVE IN	DIAMETER			LENGTH		WEIGHT		IDLE SPEED (RPM)	
	NM	FT-LB		D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	IN	MM	LB	KG	1ST GEAR	2ND GEAR
ABG860	115 - 860	85 - 635	3/4	41 mm / 1.6 in	85 mm / 3.3 in	88 mm / 3.5 in	11.6	295	12.1	5.5	7.0	24.0
ABG1400	150 - 1,400	110 - 1,030	3/4	41 mm / 1.6 in	85 mm / 3.3 in	88 mm / 3.5 in	11.6	295	12.1	5.5	4.0	13.0
ABG2200	250 - 2,200	185 - 1,620	1	54 mm / 2.1 in	85 mm / 3.3 in	88 mm / 3.5 in	12.6	320	15.4	7.0	2.0	6.5
ABG2800	300 - 2,800	220 - 2,065	1	54 mm / 2.1 in	85 mm / 3.3 in	88 mm / 3.5 in	13.6	345	16.3	7.4	1.7	6.0
ABG3200	360 - 3,200	265 - 2,360	1	72 mm / 2.8 in	93 mm / 3.7 in	97 mm / 3.8 in	14.6	370	16.3	7.4	1.5	5.0
ABG4100	500 - 4,100	370-3,025	1-1/2	72 mm / 2.8 in	93 mm / 3.7 in	97 mm / 3.8 in	14.6	370	20.1	9.1	1.0	4.0

When loosening bolts, a higher torque (up to 20%) may be necessary (release torque).

*Unmatched accuracy through precision engineering and design*

**FEATURES AND BENEFITS**

AcraDyne's High Torque Pneumatic Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners. Appropriate for use in industries requiring high torque capability, accuracy, power, and safety.

- Modular design allows for ease of maintenance
- Interchangeable motors and gearing
- Same proven and reliable gearbox as the AcraDyne DC line
- One-hand reverse



**AAP1B66600A**




**AAP1B76950A**



**AAP1B772000A**



**AAP1B885100A**

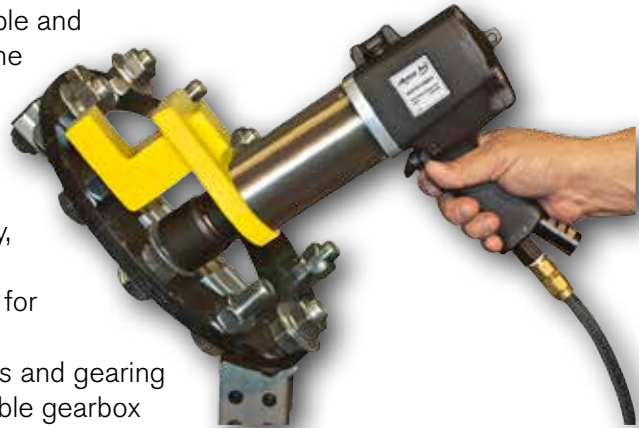

MODEL	TORQUE (NM)	TORQUE (FT-LB)	SPEED (RPM)	WEIGHT (LB)	SQUARE DR. (IN)	AIR CONSUMPTION (CFM)
AAP1B66400A	400	300	57	9.75	3/4	22.9
AAP1B66600A	600	450	39	9.75	3/4	22.9
AAP1B66850A	850	625	27	9.75	3/4	22.9
AAP1B76950A	950	700	31	10.4	3/4	26.3
AAP1B771350A	1,350	1,000	22	10.4	1	26.3
AAP1B772000A	2,000	1,475	14	12.7	1	26.3
AAP1B772950A	2,950	2,175	9	14.9	1	26.3
AAP1B885100A	5,100	3,775	8	23	1-1/2	31.5

**AIR PREPARATION UNITS**

Many stacking filter/regulator combinations are available. See page 18 for options.



**AFRL-4**



**AFRL-4HTA Standalone Unit**

**28178 HT Air Tool/AFRL Carrying Kit**





## HIGH TORQUE PNEUMATIC BOLTING TOOLS

Our High-Torque Pneumatic High-Speed Series Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners with high torque capability, accuracy, power, and safety.

### FEATURES AND BENEFITS

- Extremely fast rundown speed due to the dual motor design
- High torque output to weight ratio
- No reaction force due to the reaction bar and swivel gearbox
- Full swivel gearcase facilitates reaction bar positioning for ease of use and operator comfort
- Handle exhaust with low sound level
- Low air consumption compared to large motor frame type tools
- Uses the same durable and reliable gearbox from our DC line of high torque tools
- Modular design allows for easy maintenance
- One motor is used for all models in the range
- Two-piece handle construction enables flexible handle design
- Available in reversible and non-reversible models



MODEL*	TORQUE		SPEED (RPM)	WEIGHT		SQUARE DR. (IN)
	(NM)	(FT-LB)		(LB)	(KG)	
AAP2B76250A(R)	250	185	660	10.5	4.8	3/4
AAP2B76450A(R)	450	330	335	10.5	4.8	3/4
AAP2B76650A(R)	650	480	223	10.5	4.8	3/4
AAP2B76950A(R)	950	700	153	10.5	4.8	3/4
AAP2B771400A(R)	1,400	1,000	110	14.6	6.6	1
AAP2B772000A(R)	2,000	1,475	63	14.8	6.7	1
AAP2B773000A(R)	3,000	2,210	52	15.0	6.8	1
AAP2B785100A(R)	4,800	3,540	26.5	19.7	8.9	1.5

\*Add "R" to part numbers for reversible models.

# DynaTorque

## MANUAL TORQUE MULTIPLIERS

### FEATURES AND BENEFITS

Manual Torque Multipliers offer the perfect, economical solution to high torque bolting applications.

- Superior power to weight ratio
- Delivered torque accuracy +/- 4%
- Anti-Wind Up safety feature (2,800 NM models and up) prevents input device from springing backward when released
- True torque multiplication ratios
- Standard reaction arms supplied. Custom reaction arms/nose extensions available to suit specific applications
- No preventative maintenance required
- Overload protected by shear-drive design (spare torsion shaft included). Easily replace sheared-off pins at the work site



ATM-2800



ATM-800



ATM-1800



ATM-3800




All DynaTorque Multipliers are supplied in a rugged, weather-resistant, portable carrying case.

MODEL	INPUT		RATIO	MAX TORQUE OUTPUT	
	IN	IN		Nm	Ft-Lb
ATM-800	1/2	3/4	1:3.5	800	590
ATM-1800	3/4	1	1:3.6	1,800	1,238
ATM-2800	1/2	1	1:13	2,800	2,066
ATM-3800	3/4	1	1:13	3,800	2,804
ATM-5000	3/4	1.5	1:17	5,000	3,690
ATM-8000	3/4	1.5	1:49	8,000	5,904
ATM-12000	3/4	1.5	1:58	12,000	8,856
ATM-16000	3/4	2.5	1:75	16,000	11,808

\* Weight shown does not include weight of reaction device.

# SOCKETS

## IMPACT SOCKETS

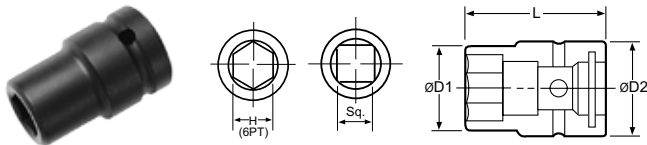

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------

### 3/4" Square Drive

SAE	A611/16	11/16"	30	1.18	44	1.73	50	1.97
	A63/4	3/4"	32	1.26	44	1.73	50	1.97
	A613/16	13/16"	35	1.38	44	1.73	50	1.97
METRIC	A614	14 mm	24	0.95	38	1.50	55	2.17
	A616	16 mm	27	1.06	44	1.73	50	1.97
	A617	17 mm	30	1.18	38	1.50	55	2.17


### 3/4" Square Drive, Deep

SAE	A611/16-4	11/16"	31	1.22	44	1.73	100	3.94
	A63/4-4	3/4"	33	1.30	44	1.73	100	3.94
	A613/16-4	13/16"	36	1.42	44	1.73	100	3.94
METRIC	A617-4	17 mm	31	1.22	44	1.73	100	3.94
	A618-4	18 mm	32	1.26	44	1.73	100	3.94
	A619-4	19 mm	33	1.30	38	1.50	100	3.94

### 1" Square Drive

SAE	A87/8	7/8"	37	1.46	54	2.13	59	2.32
	A815/16	15/16"	38	1.50	54	2.13	59	2.32
	A81	1"	41	1.61	54	2.13	59	2.32
METRIC	A817	17 mm	31	1.22	50	1.97	63	2.48
	A819	19 mm	33	1.30	50	1.97	63	2.48
	A821	21 mm	37	1.46	50	1.97	63	2.48

## ERGO-DRIVE® SOCKETS

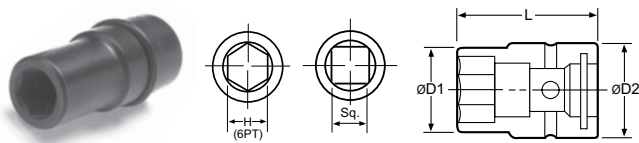

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------

### 3/4" Square Drive


A61-1/8EDS	1-1/8"	44	1.73	44	1.73	64	2.52
A61-1/4EDS	1-1/4"	49	1.91	44	1.73	66	2.60
A61-1/2EDS	1-1/2"	57	2.24	44	1.73	68	2.68
A618EDS	18 mm	31	1.22	44	1.73	60	2.36
A624EDS	24 mm	40	1.52	40	1.73	65	2.36

### 1" Square Drive

A815/16EDS	15/16"	38	1.50	54	2.13	69	2.72
A8100EDS	100 mm	136	5.35	76	2.99	120	4.72




## EXTENSIONS

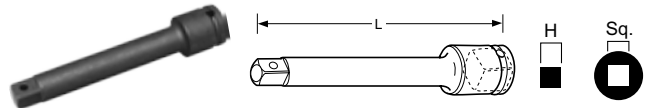

PART NO	SQ DRIVE	HEX	L MM	L IN	D MM	D IN
A610E	3/4"	3/4"	100	3.94	44	1.73
A810E	1"	1"	102	4.02	54	2.13
A1220E	1-1/4"	1-1/4"	200	7.87	60	2.36
A1418E	1-1/2"	1-1/2"	178	7.01	84	3.31
A2426E	2-1/2"	2-1/2"	264	10.39	137	5.39

## ERGO-DRIVE® EXTENSIONS



PART NO	SQ DRIVE	H	L MM	L IN	D MM	D IN
---------	-------------	---	---------	---------	---------	---------

### 3/4" Square Drive

A676EDE	3/4"	3/4"	76	2.99	40	1.58
A6100EDE	3/4"	3/4"	100	3.94	40	1.58
A6150EDE	3/4"	3/4"	150	5.91	40	1.58
A6200EDE	3/4"	3/4"	200	7.87	40	1.58

### 1" Square Drive

A8150EDE	1"	1"	150	5.91	54	2.13
A8200EDE	1"	1"	200	7.87	54	2.13

A wide variety of sockets and extensions are available. Call 1-503-254-6600, or toll free 1-800-852-1368 for more information.

# HT ACCESSORIES

## ACCESSORIES

Custom accessories are available for your application; contact an AIMCO Customer Service Associate for details, 1-503-254-6600, or toll free 1-800-852-1368.

### Swivel Handle



### Swivel Bail



### Fixed Handle

### Hoist Ring







### Fixed Handle with Hoist Ring

## REACTION BARS



HT tool includes a standard, spline attachment reaction device. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

	MODEL	DESCRIPTION
 Single Ended Flat	26810	6000 Series
	26800	7000 Series
	25277	8000 Series
	27255	9000 Series
 Single Ended Offset	26815	2.375" Offset, 6000 Series
	26885	4.00" Offset, 6000 Series
	27200	3.10" Offset, 7000 Series
	26890	4.00" Offset, 7000 Series
	25274	3.35" Offset, 8000 Series
	25275	4.00" Offset, 8000 Series
	26840	3.35" Offset, 9000 Series
	 Double Ended Flat	26830
26820		7000 Series
25278		8000 Series
 Double Ended Offset	25276	3.35" Offset, 8000 Series

MODEL	DESCRIPTION
26477	Swivel Bail, 6000 Series
26327	Swivel Bail, 7000 Series
26630	Swivel Bail, 8000 Series
26478	Swivel D-Handle, 6000 Series
26328	Swivel D-Handle, 7000 Series
25291	Swivel D-Handle, 8000 Series
26479	Stationary Bail, 6000 series (26336 handle not included)
26332	Stationary Bail, 7000 series (26336 handle not included)
25289	Stationary Bail, 8000 series (26336 handle not included)
26336	Fixed Handle (for use with 26479, 26332, 25289)
26337	Rear Fixed Hoist Ring, 6000/7000/8000 Series Pistols
28514	Rear Folding Hoist Ring Kit for 8000 Series Pistols
28549	Sliding Spindle, 6000 Series
27045	Sliding Spindle, 7000 Series
30300	Sliding Spindle, 8000 Series

## HT DC PROTECTIVE COVERS



Durable protective covers prevent marring and damage.

MODEL	DESCRIPTION
BJ10078	Protective Cover, 6000 Series
BJ10077	Protective Cover, 7000 Series
BJ10076	Protective Cover, 8000 Series

## CABLE ADAPTERS AND CONNECTORS

### Cable Adapters



26934



25646



26364



25491  
Breakaway Cable Connector

MODEL	DESCRIPTION
ADAPTERS AND CONNECTORS	
25646	G1 iEC to G3 Cable Adapter
26934	G3 iEC to G1 Cable Adapter
27210	G3 Tool to G1 Cable Adapter
26364	Right Angle Cable Adapter
26709	G3 Tool to G1 Cable (Cable Tester only)
26594	Conversion Kit G1 iEC to G3 iEC
27370	Conversion Kit G3 iEC to G1 iEC
25491	Breakaway Cable Connector - Ensures disconnect of cable should stress in excess of 40 lbs occur

## CABLES

Cable and connectors provide excellent ergonomics, maximum-quality signal transfer, and full CE compliance.



MODEL	DESCRIPTION	LENGTH
24330	Cable G3 Tool Cable 3M	3 m (9.8 ft)
25350	Cable G3 Tool Cable 5M	5 m (16.4 ft)
24320	Cable G3 Tool Cable 10M	10 m (32.8 ft)




# AIR LINE ACCESSORIES FOR HT TOOLS

## Polyurethane Hose for HT Tools



ASH-500C-15MSZ

- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility
- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature:  $-104^{\circ}\text{F}$  to  $175^{\circ}\text{F}$
- Working pressure: 100 PSI

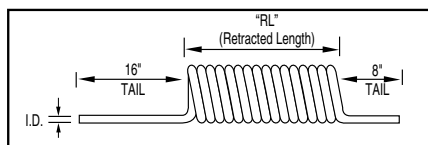

Custom length coil assemblies and special colors available in minimum order quantities. Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.

### SINGLE AIR HOSE ASSEMBLIES (COILED)

MODEL	DESCRIPTION (O.D. x I.D. x LENGTH)	RETRACTED LENGTH	NPT FITTINGS
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	1/2"

### STRAIGHT AIR HOSE (SOLD PER FOOT)

MODEL	DESCRIPTION
ASH-500Z	1/2" I.D.

Contact an AIMCO Customer Service Associate about full reel pricing, 1-503-254-6600, or toll free 1-800-852-1368.

## Rubber Hose for HT Tools



28796  
1/2" ID

- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature:  $-40^{\circ}\text{F}$  to  $190^{\circ}\text{F}$

### SINGLE AIR HOSE (RUBBER)

I.D.	O.D.	LENGTH	WORKING PRESSURE	WEIGHT
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb'

Custom lengths available. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

### HT Air Tool/AFRL Carrying Kit



28178

Complete System Pack including nested FRL. Check with your AIMCO representative for details, 1-503-254-6600, or toll free 1-800-852-1368.

## Air Line Fittings



### PLUGS

MODEL	DESCRIPTION
28161	1/2" x 1/4" MPT
28162	1/2" x 3/8" MPT
28163	1/2" x 1/2" MPT
28164	1/2" x 1/2" FPT



### QUICK-CHANGE COUPLERS

MODEL	DESCRIPTION
27768	1/2" FPT
27769	1/2" MPT



### PROTECTIVE COUPLER

MODEL	DESCRIPTION
27771	Vinyl



### SWIVEL FITTING

MODEL	CAPACITY
500-SZ	1/2" NPT Swivel Fitting

# AIR PREPARATION UNITS

## AFRL STACKING FILTER/REGULATORS


Stacking filter/regulator combinations provide air filtration and precise regulation in a single unit for easy mounting and installation.

### FEATURES AND BENEFITS


- All models include L-mount bracket, gauge, and metal bowl shields
- Polycarbonate filter and lubricator bowls (metal bowls standard on AFRL-8)
- 25-micron filter included on all models
- Regulating range: 7 – 125 PSI
- Custom order upgrade items include metal bowl, 5 micron filter, semi-automatic filter drain, and reduced PSI range regulator. Contact an AIMCO Customer Service Associate for more information, 1-503-254-6600, or toll free 1-800-852-1368.



**AFRL-2-C  
AFRL-3-C**

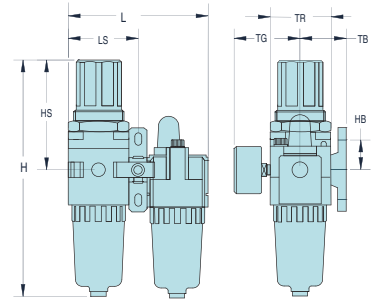


**AFRL-3  
AFRL-4  
AFRL-8**

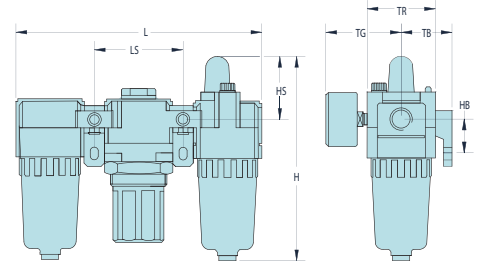

**AFRL-4HTA  
Standalone Unit**

MODEL	PORT	GAUGE PORT	FLOW RATE CFM	FLOW RATE L/MIN	BOWL SHIELD	H IN/MM	HB IN/MM	HS IN/MM	L IN/MM	LS IN/MM	TB IN/MM	TG IN/MM	TR IN/MM
AFRL-2	1/4"	1/8"	70	2,000	yes	6.16 (156.5)	1.39 (35.3)	1.50 (38.1)	7.13 (181.1)	2.52 (64.0)	1.61 (41.0)	2.39 (60.7)	2.09 (53.1)
AFRL-2-C	1/4"	1/8"	60	1,700	yes	8.31 (211.1)	1.38 (35.1)	3.64 (92.5)	4.61 (117.1)	2.30 (58.4)	1.61 (40.9)	2.39 (60.7)	2.09 (53.1)
AFRL-3	3/8"	1/4"	140	4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-3-C	3/8"	1/4"	105	3,000	yes	10.31 (261.9)	1.57 (39.9)	4.41 (112.0)	6.06 (153.9)	3.03 (77.0)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-4	1/2"	1/4"	140	4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-8	1"	1/4"	180	5,000	yes	10.69 (271.5)	1.97 (50.0)	1.89 (48.0)	11.81 (300.0)	4.13 (104.9)	2.75 (69.9)	2.97 (75.4)	3.54 (89.9)

### AIR PREPARATION UNITS: BASIC FUNCTIONS

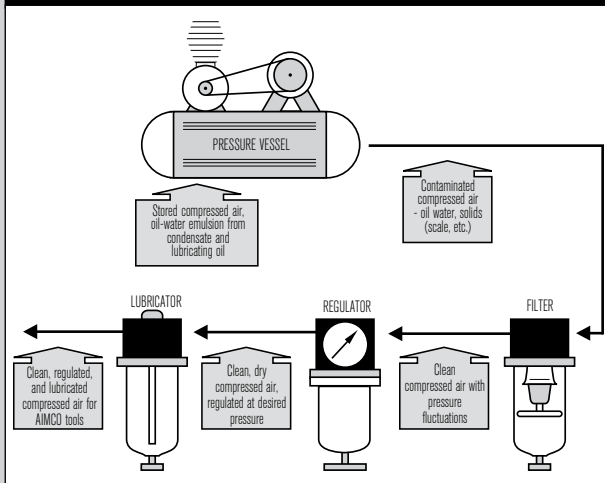

The supply of clean, dry air is essential to the operation of pneumatic powered tools. Use only clean filtered air for longer tool life. Provide proper airflow (CFM) and regulate air pressure (PSI) for optimum performance.

#### To determine unit size for application, you need to know:

- Total air flow (CFM) required for application
- Size of incoming air line and size of air line required by tool
- Air supply pressure (PSI)
- Allowable pressure drop
- Does the application require lubrication?
- Does the overall system have the required capacity?

# INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
A1220E	15	AAP2B785100A(R)	13	AEJ4A885000B	4	AEP4B896500B	5	24330	16
A1418E	15	ABG860	11	AEJ4A896500B	4	AEP4B898100B	5	25274	16
A2426E	15	ABG1400	11	AEJ4A898100B	4	AEP4W872800B	5	25275	16
A61-1/2EDS	15	ABG2200	11	AEJ4B66250B	5	AED4W884650B	5	25276	16
A61-1/4EDS	15	ABG2800	11	AEJ4B66425B	5	AEP4W884650B	5	25277	16
A61-1/8EDS	15	ABG3200	11	AEJ4B66625B	5	AEP4W896500B	5	25278	16
A63/4	15	ABG4100	11	AEJ4B66925B	5	AEP(A)(B)773000BDL	7	25289	16
A610E	15	AED4A66250B	4	AEJ4B771200B	5	AES4A66250B	4	25291	16
A611/16	15	AED4A66425B	4	AEJ4B773000B	5	AES4A66425B	4	25350	16
A611/16-4	15	AED4A66625B	4	AEJ4B884200B	5	AES4A66625B	4	25491	16
A613/16	15	AED4A66925B	4	AEJ4B884200B1	5	AES4A66925B	4	25646	16
A613/16-4	15	AED4A771200B	4	AEJ4B885000B	5	AES4A771200B	4	26327	16
A614	15	AED4A884200B	4	AEJ4B896500B	5	AES4A773000B	4	26328	16
A616	15	AED4A884200B1	4	AEJ4B898100B	5	AES4A884200B	4	26332	16
A617	15	AED4A885000B	4	AEJ4W872800B	5	AES4A884200B1	4	26336	16
A617-4	15	AED4A896500B	4	AEJ4W884650B	5	AES4A885000B	4	26337	16
A618-4	15	AED4A898100B	4	AEJ4W896500B	5	AES4A896500B	4	26364	16
A618EDS	15	AED4W896500B	5	AEN356540A	6	AES4A898100B	4	26477	16
A619-4	15	AED4W885000B	5	AEN3571000A	6	AES4(A)(B)66250BDL	7	26478	16
A624EDS	15	AED4W885000B	5	AEN3571600A	6	AES4(A)(B)66425BDL	7	26479	16
A676EDE	15	AED4W896500B	5	AEN3572600A	6	AES4(A)(B)66625BDL	7	26594	16
A6100EDE	15	AED4W885000B	5	AEP4A66250B	4	AES4(A)(B)66925BDL	7	26630	16
A6150EDE	15	AEF4A66250B	4	AEP4A66425B	4	AES4(A)(B)771200BDL	7	26709	16
A6200EDE	15	AEF4A66625B	4	AEP4A66625B	4	AES4(A)(B)773000BDL	7	26800	16
A81	15	AEF4A66925B	4	AEP4A66925B	4	AES4(A)(B)884200B1DL	7	26810	16
A87/8	15	AEF4A771200B	4	AEP4A771200B	4	AES4(A)(B)884200BDL	7	26815	16
A810E	15	AEF4A773000B	4	AEP4A773000B	4	AES4(A)(B)885000BDL	7	26820	16
A815/16	15	AEF4A884200B	4	AEP4A884200B	4	AES4(A)(B)896500BDL	7	26830	16
A815/16EDS	15	AEF4A884200B1	4	AEP4A884200B1	4	AES4(A)(B)898100BDL	7	26840	16
A817	15	AEF4A885000B	4	AEP4A885000B	4	AFRL-4	12, 18	26885	16
A819	15	AEF4A896500B	4	AEP4A896500B	4	AFRL-4HTA	12, 18	26890	16
A821	15	AEF4A898100B	4	AEP4A898100B	4	AFRL-2	18	26934	16
A8100EDS	15	AEF4(A)(B)66250BDL	7	AEP4(A)(B)66250BDL	7	AFRL-2-C	18	27045	16
A8150EDE	15	AEF4(A)(B)66425BDL	7	AEP4(A)(B)66425BDL	7	AFRL-3	18	27200	16
A8200EDE	15	AEF4(A)(B)66625BDL	7	AEP4(A)(B)66625BDL	7	AFRL-3-C	18	27210	16
AAP1B66400A	12	AEF4(A)(B)66925BDL	7	AEP4(A)(B)66925BDL	7	AFRL-8	18	27255	16
AAP1B66600A	12	AEF4(A)(B)771200BDL	7	AEP4(A)(B)771200BDL	7	ASH-500C-15MSZ	17	27370	16
AAP1B66850A	12	AEF4(A)(B)773000BDL	7	AEP4(A)(B)884200B1DL	7	ASH-500C-25MSZ	17	27768	17
AAP1B771350A	12	AEF4(A)(B)884200B1DL	7	AEP4(A)(B)884200BDL	7	ASH-500Z	17	27769	17
AAP1B772000A	12	AEF4(A)(B)884200BDL	7	AEF4(A)(B)885000BDL	7	ATM-800	14	27771	17
AAP1B772950A	12	AEF4(A)(B)885000BDL	7	AEF4(A)(B)896500BDL	7	ATM-1800	14	28161	17
AAP1B885100A	12	AEF4(A)(B)896500BDL	7	AEF4(A)(B)898100BDL	7	ATM-2800	14	28162	17
AAP2B76250A(R)	13	AEF4(A)(B)898100BDL	7	AEJ4A66250B	4	ATM-3800	14	28163	17
AAP2B76450A(R)	13	AEJ4A66250B	4	AEJ4A66425B	4	ATM-5000	14	28164	17
AAP2B76650A(R)	13	AEJ4A66625B	4	AEJ4A66625B	4	ATM-8000	14	28178	12, 17
AAP2B76950A(R)	13	AEJ4A66925B	4	AEJ4A66925B	4	ATM-12000	14	28514	16
AAP2B771400A(R)	13	AEJ4A771200B	4	AEJ4B771200B	5	ATM-16000	14	28549	16
AAP2B772000A(R)	13	AEJ4A773000B	4	AEJ4B773000B	5	BJ10076	16	28796	17
AAP2B772000A(R)	13	AEJ4A884200B	4	AEJ4B884200B	5	BJ10077	16	30300	16
AAP2B773000A(R)	13	AEJ4A884200B1	4	AEJ4B884200B1	5	BJ10078	16	500-SZ	17
		AEJ4A884200B1	4	AEJ4B885000B	5	24320	16		



# APPLICATIONS - PARTIAL REFERENCES



## PETROCHEM

- Reactor
- Cracker
- Heat-Exchanger
- Valves, Pumps
- Compressors
- Heaters



## COMPRESSOR STATION

- Tie Rod
- Engines
- Compressors
- Turbines
- Pipe-Line
- Well Heads



## STEEL MILL

- Sintering
- Blast Furnace
- Hot Strip
- Cold Roll
- Central Machine
- Pipe Shop



## WIND TURBINE

- Tower Bolts
- Foundation Bolts
- Bearing Housing
- Shrink Disc
- Gear Mount
- Hub Bearing



## OFFSHORE

- Diesel Engine
- Mud Pump
- Crane
- Vessel Thruster
- Stacks



## POWER

- Steam Turbine
- Gas Turbine
- Hydro Turbine
- Comb. Cycle
- Valves, Pumps, Reactors, Pipes



## MINING

- Shovel & Drill
- Ball Mill
- Long-Wall
- Hoist
- Car Carrier



10000 SE Pine St.  
Portland, Oregon 97216  
Phone: (503) 254-6600, 1-800-852-1368  
[www.aimco-global.com](http://www.aimco-global.com)

### AIMCO CORPORATION DE MEXICO SA DE CV

Ave. Cristobal Colon 14529  
Chihuahua, Chihuahua. 31125  
Mexico

Toll Free : (01-800) 801-1600

Direct : (01-614) 380-1010

Fax: (01-614) 380-1019

### AIMCO EUROPE

C/ Río Gallo, 431 urb. Montelar  
19174 Galápagos / Guadalajara  
Spain

Phone: +34 673 34 99 25

### AIMCO CHINA

Room 607, No. 3998 Hongxin Rd,  
Dibao Plaza, Minhang District,  
Shanghai, 201103  
China

Phone: 0086-21-34319246

Fax: 0086-21-34319245

### AIMCO SOUTH AMERICA

Carrera 29A, #7B-91. Origami Building.  
Int604

Medellin; Colombia 050021

Phone: +57 300-2926550