
ASSEMBLY SYSTEMS



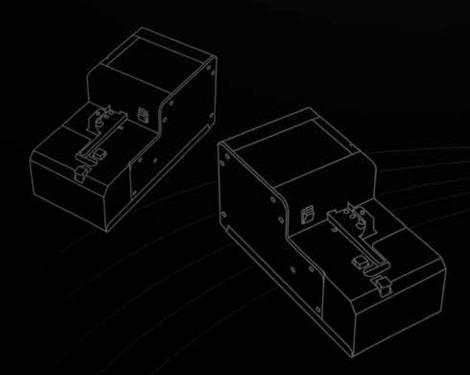

For over 40 years AIMCO has been working with manufacturers around the world, we are the complete global source for all assembly, fastening, and critical bolting needs. AIMCO can effectively and swiftly meet your needs whether you're in Thailand fastening a 3 mm nut at 3 Nm, or in Tennessee, USA torquing the last lug nut. AIMCO provides the tools and solutions, on a global scale, that guarantee the success of your project. It is with great pride that AIMCO can say the products that we manufacture are **MADE IN THE USA**.

ISO 9001: 2015 Certified

SCREW PRESENTERS: OVERVIEW


For semi-automated assembly, look no further – AIMCO AcraFeed® screw presenters provide:

PRODUCTIVITY

- · One hand operation eliminates manual handling of screws.
- Screw is presented to operator for easy magnetic or vacuum pickup.
- Keeps workspace clear of dropped fasteners.
- Quick feed rate from oscillating hopper design up to two (2) screws per second.
- Large hopper holds approximately 1000 1500 fasteners.
- Solid design no tie downs or straps required.

FLEXIBILITY

- · Perfect for contract or dedicated assembly.
- Switch rails in minutes for different screw sizes.

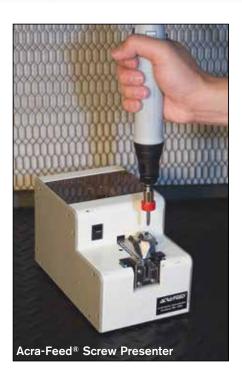

ERGONOMICS

· Allows for fewer arm and hand movements.

RELIABILITY

- · Heavy duty industrial design.
- Modular design for easy repairs.

QUALITY

- · Uses existing or our new torque control drivers.
- · Keeps stray fasteners from getting into assemblies.

FASTENING IN 3 EASY STEPS



Load screws into the hopper.
There is no side to load
unit and no gates to limit
capacity.



Address screw with magnetized bit.



ΔC3Δ·FEED[®]

Bring screw to workpiece and fasten parts.

A-50 SCREW PRESENTERS



STANDARD SCREW PRESENTERS

	ADDITIONAL RAIL	SCRE\	W SIZE	MAX SCRE	W LENGTH
MODEL	PART NO.	IN	MM	IN	MM
A-50A-0	AR-O	#0	1.4	.39	10
A-50A-1.7	AR-1.7	-	1.7	.39	10
A-50B-1	BR-1	#1	2.0	.75	18
A-50B-2	BR-2	#2	2.3	.75	18
A-50B-3	BR-3	#3	2.6	.75	18
A-50B-4	BR-4	#4	3.0	.75	18
A-50C-6	CR-6	#6	3.5	.75	18
A-50C-8	CR-8	#6-8	4.0	.75	18
A-50C-10	CR-10	#10	5.0	.75	18

Dimensions: 5.1 (W) x 8.5 (L) x 5.3 (H) Weight: 7.0 lbs.

ROBOTIC SCREW PRESENTERS

		_		_	
	ADDITIONAL RAIL	SCRE	W SIZE	MAX SCRE	EW LENGTH
MODEL	PART NO.	IN	MM	IN	MM
A-50ARBT-0	AR-RBT-0	#0	1.4	.39	10
A-50ARBT-1.7	AR-RBT-1.7	-	1.7	.39	10
A-50BRBT-1	BR-RBT-1	#1	2.0	.70	18
A-50BRBT-2	BR-RBT-2	#2	2.3	.70	18
A-50BRBT-3	BR-RBT-3	#3	2.6	.70	18
A-50BRBT-4	BR-RBT-4	#4	3.0	.70	18
A-50CRBT-6	CR-RBT-6	#6	3.5	.70	18
A-50CRBT-8	CR-RBT-8	#6-8	4.0	.70	18
A-50CRBT-10	CR-RBT-10	#10	5.0	.70	18

Dimensions: 5.1" (W) x 10.8" (L) x 5.3" (H) Weight: 9.2 lbs.

COMPACT ROBOTIC SCREW PRESENTERS

	ADDITIONAL RAIL	NOMINAL SCREW SIZE		MAX SCREW LENGTH	
MODEL	PART NO.	IN	MM	IN	MM
A-50ARBTC-0	AR-RBTC-0	#0	1.4	.390	10
A-50ARBTC-1.7	AR-RBTC-1.7	-	1.7	.390	10
A-50BRBTC-1	BR-RBTC-1	#1	2.0	.700	18
A-50BRBTC-2	BR-RBTC-2	#2	2.3	.700	18
A-50BRBTC-3	BR-RBTC-3	#3	2.6	.700	18
A-50BRBTC-4	BR-RBTC-4	#4	3.0	.700	18
A-50CRBTC-6	CR-RBTC-6	#6	3.5	.700	18
A-50CRBTC-8	CR-RBTC-8	#6-8	4.0	.700	18
A-50CRBTC-10	CR-RBTC-10	#10	5.0	.700	18

 $\label{eq:definition} \mbox{Dimensions: 7.2 (L) x 4.9 (W) x 5.7 (H)} \qquad \qquad \mbox{Weight: 6.7 lbs.}$

WHICH TO USE...?

Standard Screw Presenters

For manual assembly stations where the operator must otherwise pick up and hold fasteners by hand.

Robotic Screw Presenters

For automated fastening systems or manual systems using vacuum assist to pick up non-ferrous fasteners.

Compact Robotic Screw Presenters

For automated systems, or manual systems, using vacuum-assist to pick up nonferrous fasteners when work space is limited,

OPTIONAL ACCESSORIES

OI HOMAL ACCEC	011120
MODEL	PART NO.
Mag-O-Net Bit Magnetizer	AM1/4Z, AM5Z, AM3/16Z
A-50B Series Bit Guide Protector	NJ08004TIN8#23
A-50C Series Bit Guide Protector	NJ08004TIN8#45

ACRA-FEED AUTOMATIC SCREW FEED SYSTEMS

Reduces Cycle Time By Approximately Two Seconds Per Fastener

FEATURES AND BENEFITS

- · Delivers fastener directly to the driver.
- For #2 #10 fasteners, up to 1 inch long.
- Available for captive washer type screws (A-315V).
- · Feed speed of up to 1 screw per second.
- System includes feeder, hose assembly, air screwdriver, and FRL.

PRODUCTIVE

- Eliminates reaching for fasteners.
- Most jams are easily cleared on the line.
- · Frees operator's hand for productive use.
- Large hopper holds between 1000-5000 fasteners.

ERGONOMIC

- Eliminates manual handling of fasteners and shavings.
- Reduces workspace clutter.
- Keeps workspace clean of dropped fasteners.
- Torque reaction of standard driver is minimal and can be eliminated with optional Ergo-Arm[®].

RELIABLE

- Longest warranty in the industry 3 years.
- · Rocking Bar design only operates as needed.
- "Photo eyes" maximize motor life.
- Design eliminates burrs and shavings by minimal handling of the fastener.
- Durable head assembly lasts for years.
- There are more Acra-Feed® systems in use than any other system.

	APPLICABLE	SCREW	LENGTH				DIMENSIONS
MODEL	SCREWS	IN	MM	HOPPER CAPACITY	MAX FASTENING SPEED	WEIGHT (LB)	LXWXH(IN)
A-2100 Series	M2-M5 (#2 - #10)	1/4-1	6-25	1,500cc (1,000-5,000 pcs)*	60 screws/min*	68	7 x 17 x 16
A-315V Series	M2-M5 (#2 - #10)	1/4-1	6-25	450cc (500-2,500 pcs)*	60 screws/min*	74	10 x 21 x 16

^{*} Dependent on screw size

Power: AC 110V, 20W, AC 220V by request. Contact AIMCO at 1-800-852-1368.





HOW TO ORDER: Acra-Feed systems are application-specific and configured to the unique workpiece and requirements of the user. Quotations are provided from a review of sample workpieces, 25 fasteners, and required torque specifications.

NOTES



Visit our *NEW* website

WWW.AIMCO-GLOBAL.COM

AIMCO CORPORATE HEADQUARTERS

10000 SE Pine Street Portland, Oregon 97216 Phone: (503) 254–6600

Toll Free: 1-800-852-1368

AIMCO CORPORATION DE MEXICO SA DE CV

Ave. Cristobal Colon 14529 Chihuahua, Chihuahua. 31125

Mexico

Phone: (01-614) 380-1010 Fax: (01-614) 380-1019

AIMCO EUROPE

C/ Río Gallo, 431 urb. Montelar 19174 Galápagos / Guadalajara

Spain

Phone: +34 673 34 99 25

AIMCO CHINA

Room 607, No. 3998 Hongxin Rd Minhang District, Shanghai

China

Phone: 0086-21-34319246 Fax: 0086-21-34319245

AIMCO SOUTH AMERICA

Carrera 29A, #7B-91. Origami Building. Int604

Medellin; Colombia 050021

LIT-AT115 REV 06-29-16, PRINTED IN USA, © 2016 AIMCO