




Fieldbus Conversion Kit (UEC)




INSTRUCTION MANUAL

Note: This document is intended for AIMCO/AcraDyne Service Employees with a working knowledge of UEC Controllers. All Electrical and Mechanical Safety precautions should be adhered to. This document serves as a general guide for all UEC controller models.

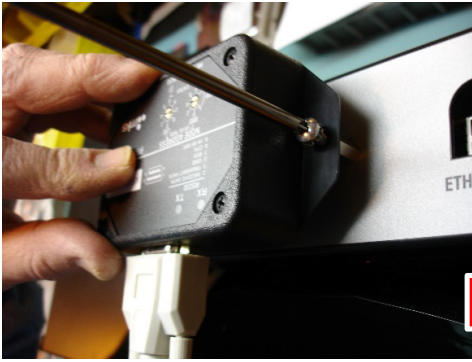

27551

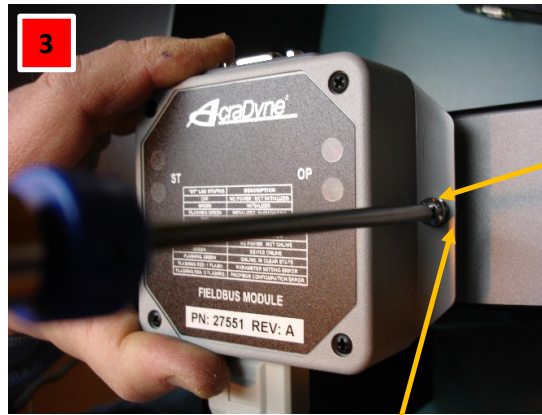

27708

27709
(install under module box)

BILL OF MATERIALS

PART NUMBER	QTY	DESCRIPTION
27551	1	Fieldbus Plug In Module w/Profibus Anybus Module
27708	2	Screw, PHP, 8-32 x 3/8, Zinc
27709	2	Washer, Flat, #8, 7/16 OD, Zinc

1. Remove two fasteners (24040: PHCS 8-32 x 3/8") holding Profibus Gateway. Loosen thumb screws on DB9 Serial Connector.
2. Plug in and Retighten DB9 Serial Connector.
3. Install Fieldbus Module (27551) onto existing standoffs with new fasteners (27708 & 27709). Place washers (27709) between standoffs and Fieldbus Module.

Revision History: Revision Date: 12/31/2013

Document Change Log: Initial Release



AIMCO CORPORATE HEADQUARTERS
10000 SE PINE STREET
PORTLAND, OREGON 97216
PHONE: (503) 254-6600
TOLL FREE: 1-800-852-1368
FAX: (01-614) 380-1019

AIMCO CORPORATION DE MEXICO SA DE CV
AVE. CRISTOBAL COLON 14529
CHIHUAHUA, CHIHUAHUA. 31125
MEXICO
PHONE: (01-614) 380-1010