


FASTENER TOOLS




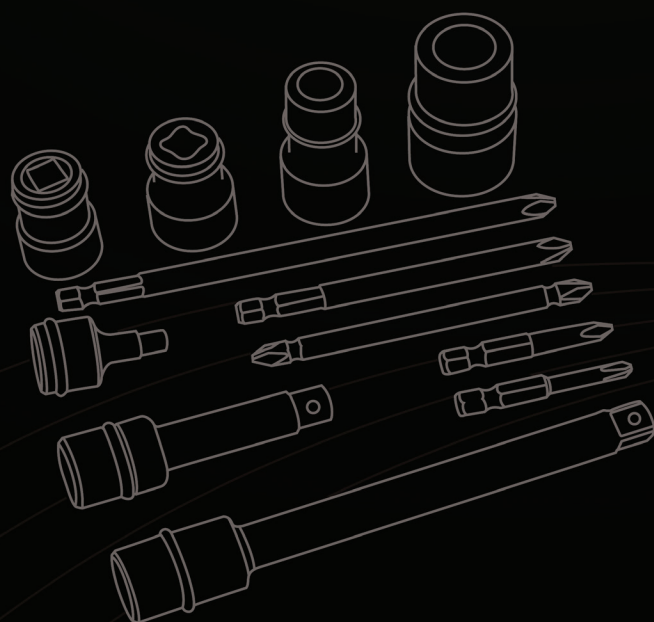

For over 40 years AIMCO has been working with manufacturers around the world, we are the complete global source for all assembly, fastening, and critical bolting needs. AIMCO can effectively and swiftly meet your needs whether you're in Thailand fastening a 3 mm nut at 3 Nm, or in Tennessee, USA torquing the last lug nut. AIMCO provides the tools and solutions, on a global scale, that guarantee the success of your project. It is with great pride that AIMCO can say the products that we manufacture are **MADE IN THE USA.**

STANDARD FASTENER TOOLS

EXTENSIONS



PART NO	SQ DRIVE	HEX	L MM	L IN	D MM	D IN
A375E	3/8"	3/8"	75	2.95	20	0.79
A405E	1/2"	1/2"	51	2.01	30	1.18
A610E	3/4"	3/4"	100	3.94	44	1.73
A810E	1"	1"	102	4.02	54	2.13
A1220E	1-1/4"	1-1/4"	200	7.87	60	2.36
A1418E	1-1/2"	1-1/2"	178	7.01	84	3.31
A2426E	2-1/2"	2-1/2"	264	10.39	137	5.39

BIT HOLDERS



PART NO	L MM	L IN
1/4" Hex, Magnetic		
A3BHM-3	75	2.94
A3BHM-4	100	3.94
A3BHM-6	150	5.91
A3BHM-8	200	7.87
A3BHM-10	250	9.84

SOCKET ADAPTERS



PART NO	FEMALE SQ. DRIVE	MALE SQ. DRIVE	D MM	D IN	L MM	L IN
A302A	3/8"	1/4"	22	0.87	35	1.38
A403A	1/2"	3/8"	25	0.98	37	1.46
A504A	5/8"	1/2"	35	1.38	47	1.46
A604A	3/4"	1/2"	38	1.50	53	2.09
A806A	1"	3/4"	50	1.97	70	2.76
A128A	1-1/4"	1"	60	2.36	76	2.99
A#508A	Spline #5	1"	60	2.36	90	3.54

UNIVERSAL SOCKETS



PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
3/8" Square Drive							
A310U	10 mm	16	0.63	20	0.79	55	2.17
A311U	11 mm	16	0.63	20	0.79	60	2.36
1/2" Square Drive							
A412U	12 mm	20.5	0.81	25	0.98	70	2.76
A413U	13 mm	19	0.75	24	0.95	70	2.76

Description of Bits and Nutsetters Part Number Nomenclature

Precedes Part Number

BITS

A3S	= Phillips® Power Drive
A3W	= Double Ended Phillips®
A38S	= Phillips® Insert
A39S	= Phillips® Insert Reduced Nose
A3M	= Slotted Power Drive
A38M	= Slotted Insert
A3MT	= Slotted Power Drive Reduced Nose
A3C	= Allen Socket Head Power Drive
A38C	= Allen Socket Head Insert
A3R	= Square Recess Power Drive
A3RT	= Square Recess Turned Down (Power)
A38R	= Square Recess Insert
A3T	= Torx® Power Drive
A38T	= Torx® Insert
A3TS	= Torq-Set® Power Drive
A38TS	= Torq-Set® Insert
A3TA	= Triangle Power Drive
A3TW	= Tri-Wing® Power Drive
A38TW	= Tri-Wing® Insert
A7	= 7/16 Power Drive
AS	= Electric Type Phillips®

BITS (Cont.)

AM	= Electric Type Slotted
ATW	= Electric Type Tri-Wing®
AT	= Electric Hios Type Torx®
A26S	= Electric Driver Phillips®
A26M	= Electric Driver Slotted
A26C	= Electric Driver Allen Socket Head
A3BHM	= Insert Bit Holder (Magnetic Type)
A3BHD	= Insert Bit Holder (Non Magnetic)

NUTSETTERS

A3B	= Nutsetter
A3BMP	= Magnetic (MP) Pressed Type
A3BMS	= Magnetic (MS) Spring Loaded
A3BMT	= Magnetic (MT) Tube Type
A3BU	= Universal Nutsetter

MAG-O-NETS

AM	= AIMCO Mag-O-Net®
----	--------------------


Contained Within Part Number

BITS

PZ	= Pozidriv®
PZACR	= Pozidriv® ACR®
SDV	= Supadriv®
TR	= Torx® Tamper Resistant
ACRI	= ACR® Installation
ACR	= ACR® Remove
ACRB	= ACR® 4x4 Both Install and Remove
E4	= Electric 4mm diameter
E5	= Electric 5mm diameter
RS	= Reduced Shank


Additional types and sizes of fastener tools are available upon request. Contact AIMCO at 1-800-852-1368.

STANDARD FASTENER TOOLS



PART NO	POINT SIZE	L MM	L IN
A3S0-2	0	50	1.97
A3S1-2	1	50	1.97
A3S1-2.75	1	70	2.76
A3S1-3	1	75	2.95
A3S1-3.5	1	90	3.54
A3S1-4	1	100	3.94
A3S1-6	1	150	5.91
A3S2-1.2	2	30	1.18
A3S2-1.6	2	40	1.57
A3S3-2	3	50	1.97
A3S3-2.75	3	70	2.76

Double-Ended




A3W1-3	1	75	2.94
A3W1-4	1	100	3.94
A3W2-2	2	50	1.97
A3W2-3	2	75	2.94
A3W2-4	2	100	3.94
A3W2-6	2	150	5.91
A3W2-8	2	200	7.87
A3W2-10	2	250	9.84
A3W2-12	2	300	11.81
A3W3-2	3	50	1.97
A3W3-3	3	75	2.94
A3W3-4	3	100	3.94
A3W3-6	3	150	5.91
A3W3-8	3	200	7.87

TORX POWER BITS





PART NO	TORX SIZE	L MM	L IN
A3T6-2	T6	50	1.97
A3T7-2	T7	50	1.97
A3T7-2.75	T7	70	2.76
A3T7-3.5	T7	90	3.54
A3T7-6	T7	150	5.91
A3T8-2	T8	50	1.97
A3T9-2.75	T9	70	2.76



PART NO	HEX	L MM	L IN
A3B1/4-2	1/4"	50	1.97
A3B1/4-2.5	1/4"	63	2.50
A3B5/16-2	5/16"	50	1.97
A3B5/16-2.5	5/16"	63	2.50
A3B3/8-2	3/8"	50	1.97
A3B3/8-2.5	3/8"	63	2.50
A3B05-2.75	5 mm	70	2.76
A3B55-1.2	5.5 mm	30	1.18
A3B55-2.75	5.5 mm	70	2.76
A3B55-4	5.5 mm	100	3.94
A3B06-2.75	6 mm	70	2.76
A3B07-1.2	7 mm	30	1.18
A3B07-2	7 mm	50	1.97
A3B07-2.75	7 mm	70	2.76
A3B07-4	7 mm	100	3.94
A3B08-1.2	8 mm	30	1.18
A3B08-2	8 mm	50	1.97
A3B08-2.75	8 mm	70	2.76
A3B08-4	8 mm	100	3.94
A3B08-6	8 mm	150	5.91
A3B08-8	8 mm	200	7.87
A3B09-2.75	9 mm	70	2.76
A3B09-4	9 mm	100	3.94
A3B10-1.2	10 mm	30	1.18
A3B10-2	10 mm	50	1.97
A3B10-2.75	10 mm	70	2.76
A3B11-2.75	11 mm	70	2.76
A3B12-1.2	12 mm	30	1.18
A3B13-2.75	13 mm	70	2.76
A3B14-2.75	14 mm	70	2.76
A3B16-2.75	16 mm	70	2.76
A3B17-2.75	17 mm	70	2.76

MAG-O-NETS®*



*U.S. Patent 5861789


PART NO	TORX SIZE	L MM	L IN
AM1/4Z	7 mm	19 mm	10 mm
AM5Z	6 mm	17.5 mm	10 mm
AM3/16Z	3/16	17.5 mm	10 mm

**For custom parts, please contact us
for more information, 1-800-852-1368.**

Additional types and sizes of fastener tools are available upon request. Contact AIMCO at 1-800-852-1368.



ERGO-DRIVE® SERIES

ERGO-DRIVE® SOCKETS PROTECT...

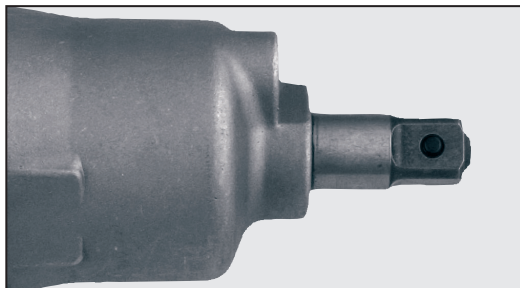


...YOUR INVESTMENT!

Pulse tools are an investment and the anvil is the most expensive single part of any pulse tool. ERGO-DRIVE® sockets decrease vibration and wear on this critical component.

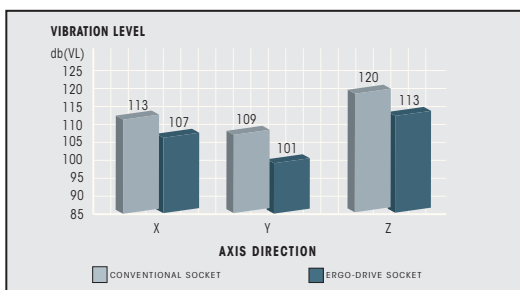

...YOUR ASSEMBLERS!



ERGO-DRIVE® sockets cause significantly less vibration during fastening than conventional sockets. This allows your assemblers to do their jobs without the worry of vibration related injuries.

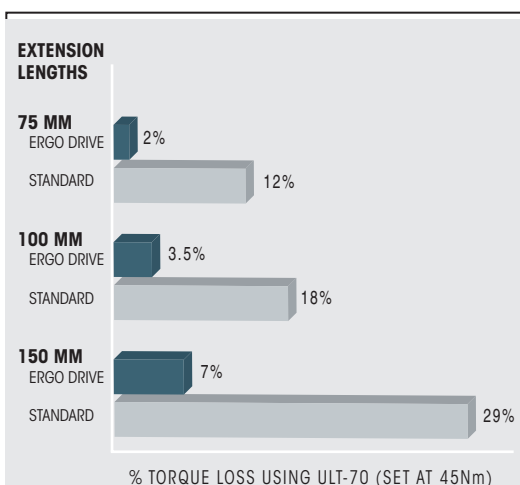

...YOUR PRODUCTS!


By reducing run-out and vibration, ERGO-DRIVE® sockets allow the most repeatable, accurate rundowns to take place, ensuring excellent product quality.

ERGO-DRIVE® VS. STANDARD

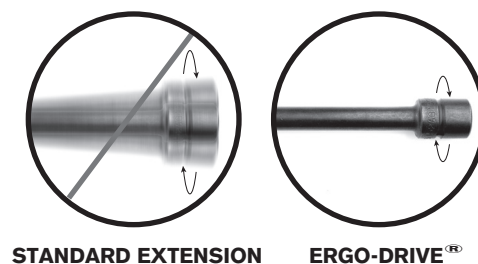

ERGO-DRIVE® FASTENER TOOLS

ERGO-DRIVE® SOCKETS

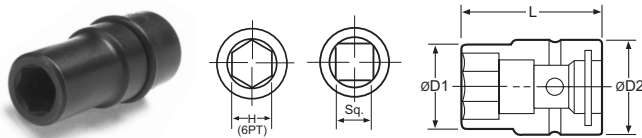

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------

3/8" Square Drive							
A31/4EDS	1/4"	10	0.39	19	0.75	44	1.73
A31/2EDS	1/2"	20	0.77	22	0.87	44	1.73
A306EDS	6 mm	10	0.39	19	0.75	44	1.73
A308EDS	8 mm	14	0.55	20	0.79	42	1.65
A310EDS	10 mm	17	0.65	20	0.79	42	1.65
A312EDS	12 mm	20	0.79	20	0.79	42	1.65
A314EDS	14 mm	22	0.87	20	0.79	42	1.65
A316EDS	16 mm	25	0.98	20	0.79	45	1.77
A318EDS	18 mm	27	1.06	20	0.79	45	1.77

1/2" Square Drive							
A41/2EDS	1/2"	19	0.75	25	0.98	50	1.97
A413EDS	13 mm	22	0.85	25	0.98	52	2.05
A414EDS	14 mm	23	0.89	25	0.98	52	2.05
A415EDS	15 mm	24	0.93	25	0.98	52	2.05
A416EDS	16 mm	25	0.98	25	0.98	52	2.05
A417EDS	17 mm	28	1.10	28	1.10	54	2.13
A418EDS	18 mm	29	1.14	28	1.10	54	2.13
A419EDS	19 mm	30	1.18	28	1.10	54	2.13


3/4" Square Drive							
A61-1/8EDS	1-1/8"	44	1.73	44	1.73	64	2.52
A61-1/4EDS	1-1/4"	49	1.91	44	1.73	66	2.60
A61-1/2EDS	1-1/2"	57	2.24	44	1.73	68	2.68
A618EDS	18 mm	31	1.22	44	1.73	60	2.36
A624EDS	24 mm	40	1.52	40	1.73	65	2.36

1" Square Drive							
A815/16EDS	15/16"	38	1.50	54	2.13	69	2.72
A8100EDS	100 mm	136	5.35	76	2.99	120	4.72

SEE ALSO: STUD BOLT SOCKETS

PART NO	THREAD SIZE	LENGTH MM	LENGTH IN	DRIVE IN
A31/4P20	1/4-20"	55	2.17	3/8
A305P0.8	M5	42	1.65	3/8
A41/4P20	1/4-20"	65	2.59	1/2
A406P1.0	M6	50	1.97	1/2

ERGO-DRIVE® EXTENSIONS



PART NO	SQ DRIVE	H	L MM	L IN	D MM	D IN
---------	-------------	---	---------	---------	---------	---------

3/8" Square Drive						
A352EDE	3/8"	3/8"	52	2.05	20	0.79
A3100EDE	3/8"	3/8"	100	3.94	20	0.79
A375EDE	3/8"	3/8"	75	2.95	20	0.79
A3150EDE	3/8"	3/8"	150	5.91	20	0.79
A3190EDE	3/8"	3/8"	190	7.48	20	0.79
A3254EDE	3/8"	3/8"	254	10.00	20	0.79
A3300EDE	3/8"	3/8"	300	11.81	20	0.79
A3320EDE	3/8"	3/8"	320	12.60	20	0.79

1/2" Square Drive						
A464EDE	1/2"	1/2"	64	2.52	28	1.10
A476EDE	1/2"	1/2"	76	2.99	28	1.10
A4125EDE	1/2"	1/2"	125	4.92	28	1.10
A4204EDE	1/2"	1/2"	204	8.03	28	1.10
A4254EDE	1/2"	1/2"	254	10.00	28	1.10
A4355EDE	1/2"	1/2"	355	13.98	28	1.10

3/4" Square Drive						
A676EDE	3/4"	3/4"	76	2.99	40	1.58
A6100EDE	3/4"	3/4"	100	3.94	40	1.58
A6150EDE	3/4"	3/4"	150	5.91	40	1.58
A6200EDE	3/4"	3/4"	200	7.87	40	1.58

1" Square Drive						
A8150EDE	1"	1"	150	5.91	54	2.13
A8200EDE	1"	1"	200	7.87	54	2.13

QUICK CHANGE CHUCKS



PART NO	SQUARE DRIVE	HEX
3/8" Square Drive		
ADC-3SEDSQ	3/8"	1/4"
ADC-3SEDSQH7/16	3/8"	7/16"
1/2" Square Drive		
ADC-4SEDSQ	1/2"	1/4"
ADC-4SEDSQH7/16	1/2"	7/16"

Additional types and sizes of fastener tools are available upon request. Contact AIMCO at 1-800-852-1368.


CUSTOM BITS, SOCKETS, AND EXTENSIONS FOR THE POWER TOOL USER

Specials are available in every style including:

- Deep Socket
- Extended Socket
- Universal
- Allen Head
- Torx Head
- Socket Adapter
- Nut Runner Socket
- Nut Runner Joint
- Nutsetter
- Magnetic Nutsetter
- Universal Nutsetter
- Screwdriver Bits



Sample request forms are shown. Your detailed requirements will allow AIMCO to quickly respond with custom solutions for your fastening requirements.




SOCKET

[illegible]

SPECIAL PARTS

SOCKET TYPES:

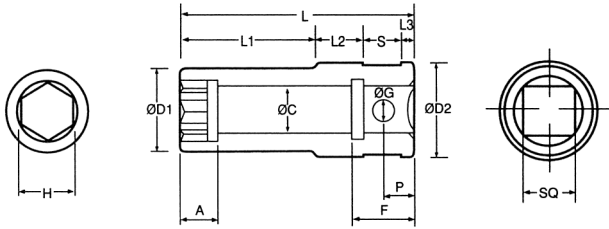


NUTRUNNER SOCKET TYPE A

Min. Qty. 10



[illegible]

✓ **Box for Ergo-Drive**

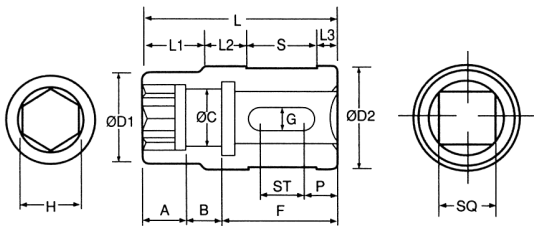

NUTRUNNER SOCKET TYPE B

Min. Qty. 10

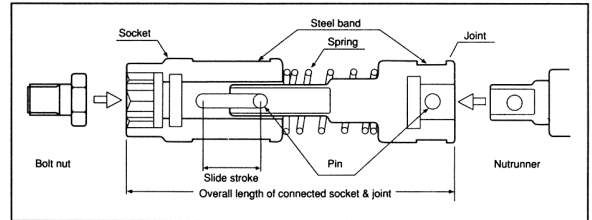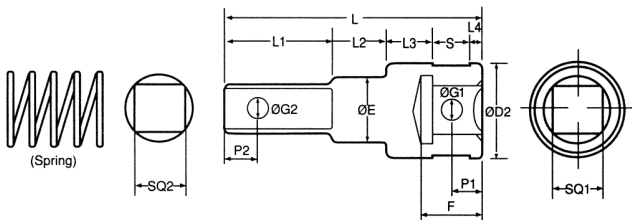
[illegible]

NUTRUNNER JOINT TYPE B

Min. Qty. 10

[illegible]

✓ Box for Ergo-Drive

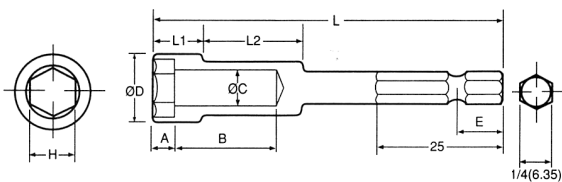

NUT SETTER


Min. Qty. 10

[illegible]


SPECIAL PARTS

MAGNETIC STYLES:



MP (Press-inserted) Type



MS (Sliding) Type



MT (Tube) Type




SOCKET

Min. Qty. 10

[illegible]

✓ **Box for Ergo-Drive**

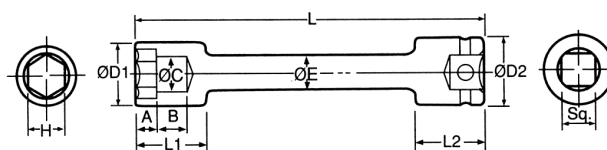


EXTENSION SOCKET

Min. Qty. 10

[illegible]

✓ Box for Ergo-Drive

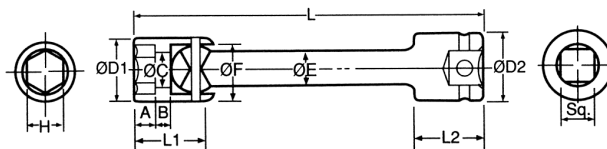

UNIVERSAL SOCKET


Min. Qty. 10

[illegible]

✓ **Box for Ergo-Drive**

ALLEN HEAD/TORX HEAD


Min. Qty. 10

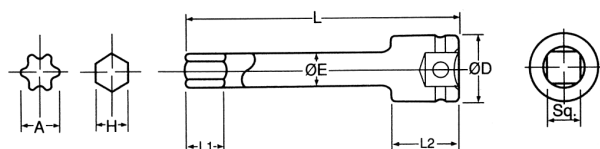[illegible]


✓ **Box for Ergo-Drive**

SOCKET ADAPTER

Min. Qty. 10

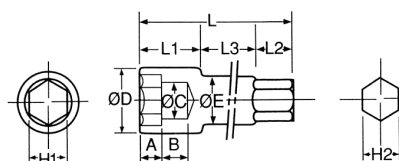[illegible]


SPECIAL PARTS

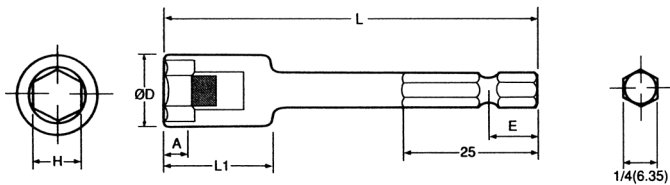

(MP) MAGNETIC NUT SETTER

Min. Qty. 10


	H	L	E	L ₁	ØD	A	Qty.
SIZE							
TYPE							

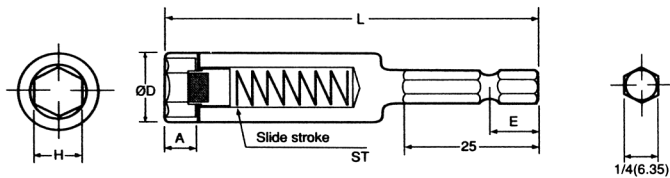

(MS) MAGNETIC NUT SETTER

Min. Qty. 10


	H	L	E	ØD	A	ST	Qty.
SIZE							
TYPE							

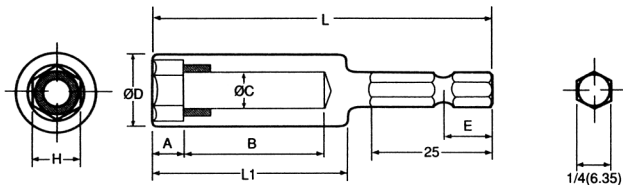

(MT) MAGNETIC NUT SETTER

Min. Qty. 10


	H	L	E	L ₁	ØD	A	B	ØC	Qty.
SIZE									
TYPE									

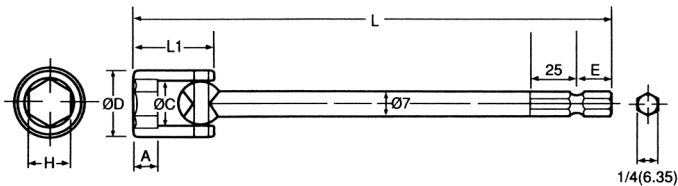

UNIVERSAL NUT SETTER

Min. Qty. 10

	H	L	E	L ₁	A	ØC	ØD	Qty.

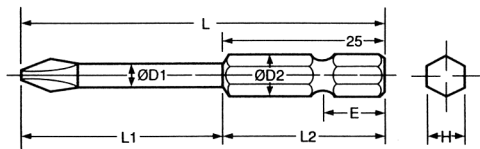

SCREWDRIVER BIT

Min. Qty. 500

Point Size	L	L ₁	L ₂	ØD ₁	ØD ₂	E	H	Qty.

CIRCLE ONE:



Phillips®



Slotted



Torx®



Torx®
Tamper Resistant



Pozidriv®



Supadriv®



Square Recess



Allen Head



Torq-Set®



Tri-Wing®

CONVERSION CHARTS

Fraction ■ Decimal ■ Metric Conversions (to .32)

	Decimal	mm		Decimal	mm		Decimal	mm		Decimal	mm
1/32	.03125	.7938	9/32	.28125	7.1438	17/32	.53125	13.4938	25/32	.78125	19.8438
1/16	.0625	1.5875	5/16	.3125	7.9375	9/16	.5625	14.2875	13/16	.8125	20.6375
3/32	.09375	2.3812	11/32	.34375	8.7312	19/32	.59375	15.0812	27/32	.84375	21.4312
1/8	.125	3.175	3/8	.375	9.525	5/8	.625	15.875	7/8	.875	22.225
5/32	.15625	3.9688	13/32	.40625	10.3188	21/32	.65625	16.6688	29/32	.90625	23.0188
3/16	.1875	4.7625	7/16	.4375	11.1125	11/16	.6875	17.4625	15/16	.9375	23.8125
7/32	.21875	5.5562	15/32	.46875	11.9062	23/32	.71875	18.2562	31/32	.96875	24.6062
1/4	.25	6.35	1/2	.5	12.7	3/4	.75	19.05	1	1.0	25.4

Thread Size to Hex Size




	MM		MM	UNC	INCHES	SAE	INCHES
M 2	4	M 27	41	1/4	7/16	1/4	7/16
M 2.3	4.5	M 30	46	5/16	1/2	5/16	1/2
M 2.6	5	M 33	50	3/8	9/16	3/8	9/16
M 3	5.5	M 36	55	7/16	11/16	7/16	5/8
M 3.5	6	M 39	60	1/2	3/4	1/2	3/4
M 4	7	M 42	65	9/16	7/8	9/16	7/8
M 5	8	M 45	70	5/8	15/16	5/8	15/16
(M 5-6)	9	M 48	75	3/4	1-1/8	3/4	1-1/16
M 6	10	M 52	80	7/8	1-5/16	7/8	1-1/4
M 7	11	M 56	85	1	1-1/2	1-1/8	1-7/16
M 8	13	M 60	90	1-1/8	1-11/16	1-1/4	1-13/16
(M 8)	14	M 64	95	1-1/4	1-7/8	1-3/8	2
M 10	16	M 68	100	1-3/8	2-1/16	1-1/2	2-3/16
(M 10)	17	M 72	105	1-1/2	2-1/4		
M 12	18	M 76	110	1-3/4	2-5/8		
(M 12)	19	M 80	115	2	3		
M 14	21	M 85	120	2-1/4	3-3/8		
(M 14)	22	M 90	130	2-1/2	3-3/4		
M 16	24	M 95	135				
M 18	27	M 100	145				
M 20	30	M 105	150				
(M 22)	32	M 110	155				
M 22	34	M 115	165				
M 24	36	M 120	170				

Torque Conversion Factors

Units to be		SAE			METRIC			INTERNATIONAL SYSTEM - S.I.		
Converted		ozf-in	lbf-in	lbf-ft	gf-cm	kgf-cm	kgf-m	mNm	cNm	Nm
1 ozf-in	=	1	0.0625	0.005	72	0.072	0.0007	7.062	0.706	0.007
1 lbf-in	=	16	1	0.083	1152.1	1.152	0.0115	113	11.3	0.113
1 lbf-ft	=	192	12	1	13826	13.83	0.138	1356	135.6	1.356
1 gf-cm	=	0.014	0.0009	0.00007	1	0.001	0.00001	0.098	0.01	0.0001
1 kgf-cm	=	13.89	0.868	0.072	1000	1	0.01	98.07	9.807	0.098
1 kgf-m	=	1389	86.8	7.233	100000	100	1	9807	980.7	9.807
1 mN-m	=	0.142	0.009	0.0007	10.2	0.01	0.0001	1	0.1	0.001
1 cN-m	=	1.42	0.088	0.007	102	0.102	0.001	10	1	0.01
1 N-m	=	141.6	8.851	0.738	10197	10.20	0.102	1000	100	1


Solution Socket Series

CV-type

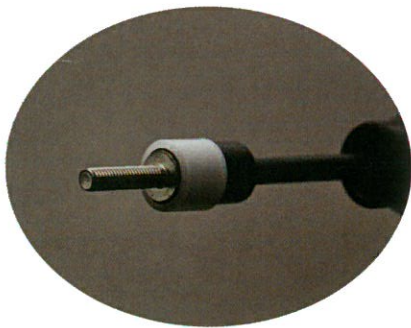

- The resin material of protection cover, spinning freely, protects against marring.
- The cost of re-works caused by mar-damage is highly reduced.

● Short type

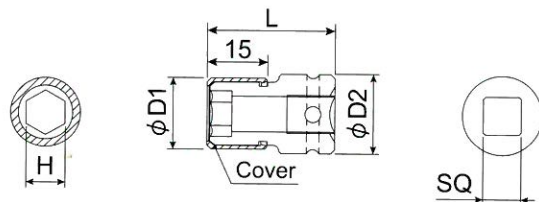

【Spec.】

■ 9.52mm (3/8")



Part No.	SQ (mm)	H (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CV-310	9.52	10	18	20	32
CV-312	9.52	12	21	20	32
CV-313	9.52	13	22	20	32
CV-314	9.52	14	25	20	32
CV-316	9.52	16	27	20	32

【Spec.】

■ 12.7mm (1/2")

Part No.	SQ (mm)	H (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CV-412	12.7	12	21	25	40
CV-413	12.7	13	22	25	40
CV-414	12.7	14	25	25	40
CV-416	12.7	16	27	25	40
CV-417	12.7	17	28	28	42



● Extension type with MF Magnet

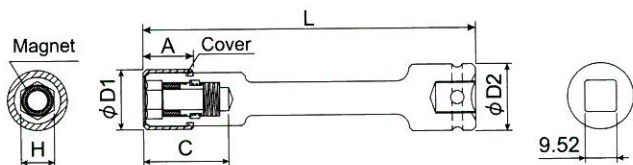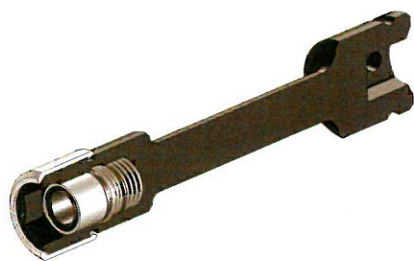

【Spec.】

Part No.	H (mm)	φ D1 (mm)	φ D2 (mm)	A (mm)	C (mm)	L (mm)
CV-310EMF100	10	18	20	15	25	100
CV-310EMF150	10	18	20	15	25	150
CV-312EMF100	12	21	20	15	25	100
CV-312EMF150	12	21	20	15	25	150
CV-313EMF100	13	22	20	15	25	100
CV-313EMF150	13	22	20	15	25	150


● Anti-Vibration type with MF Magnet

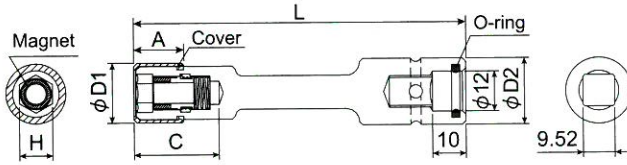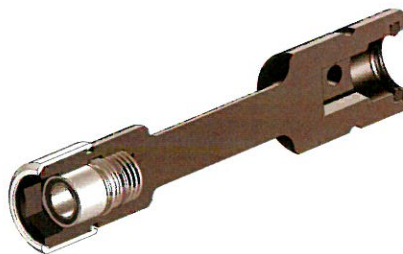

【Spec.】

Part No.	H (mm)	φ D1 (mm)	φ D2 (mm)	A (mm)	C (mm)	L (mm)
CV-AV310EMF100	10	18	20	15	25	100
CV-AV310EMF150	10	18	20	15	25	150
CV-AV312EMF100	12	21	20	15	25	100
CV-AV312EMF150	12	21	20	15	25	150
CV-AV313EMF100	13	22	20	15	25	100
CV-AV313EMF150	13	22	20	15	25	150

● Driver Socket type with MF Magnet

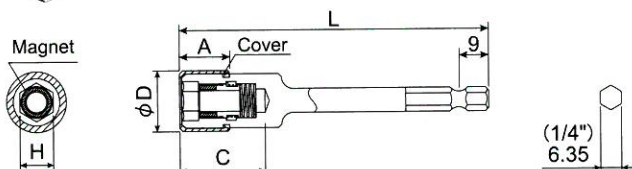

B-30B TYPE

【Spec.】

Part No.	H (mm)	φ D (mm)	A (mm)	C (mm)	L (mm)
CV-3BMF1010	10	18	15	25	100
CV-3BMF1015	10	18	15	25	150
CV-3BMF1210	12	21	15	25	100
CV-3BMF1215	12	21	15	25	150
CV-3BMF1310	13	22	15	25	100
CV-3BMF1315	13	22	15	25	150

● Protection Cover



【Spec.】

Part No.	Applicable hex size
CVC-10	for H10
CVC-12	for H12
CVC-13	for H13
CVC-14	for H14
CVC-16	for H16
CVC-17	for H17

NAC
NAGAHORI INDUSTRY CO.,LTD.

AIMCO



Solution Socket Series

CVF SOCKET


SAFETY ANTI-MAR PROTECTION



- The fully protective cover gives a highest benefit to the operators who could escape from injury in fingers. = **SAFETY**
- The resin material of protective cover, spinning freely, protects against marring.=**ANTI-MARRING**
- The anti-vibrational connection of extension bar and socket has the advantages.
=**MINIMIZING TORQUE LOSS** and **ERGONOMICS**


CVFA-Type

CVFA: the resin cover extends to the edge.



CVFB-Type

CVFB: the resin cover leaves a space for pin and o-ring

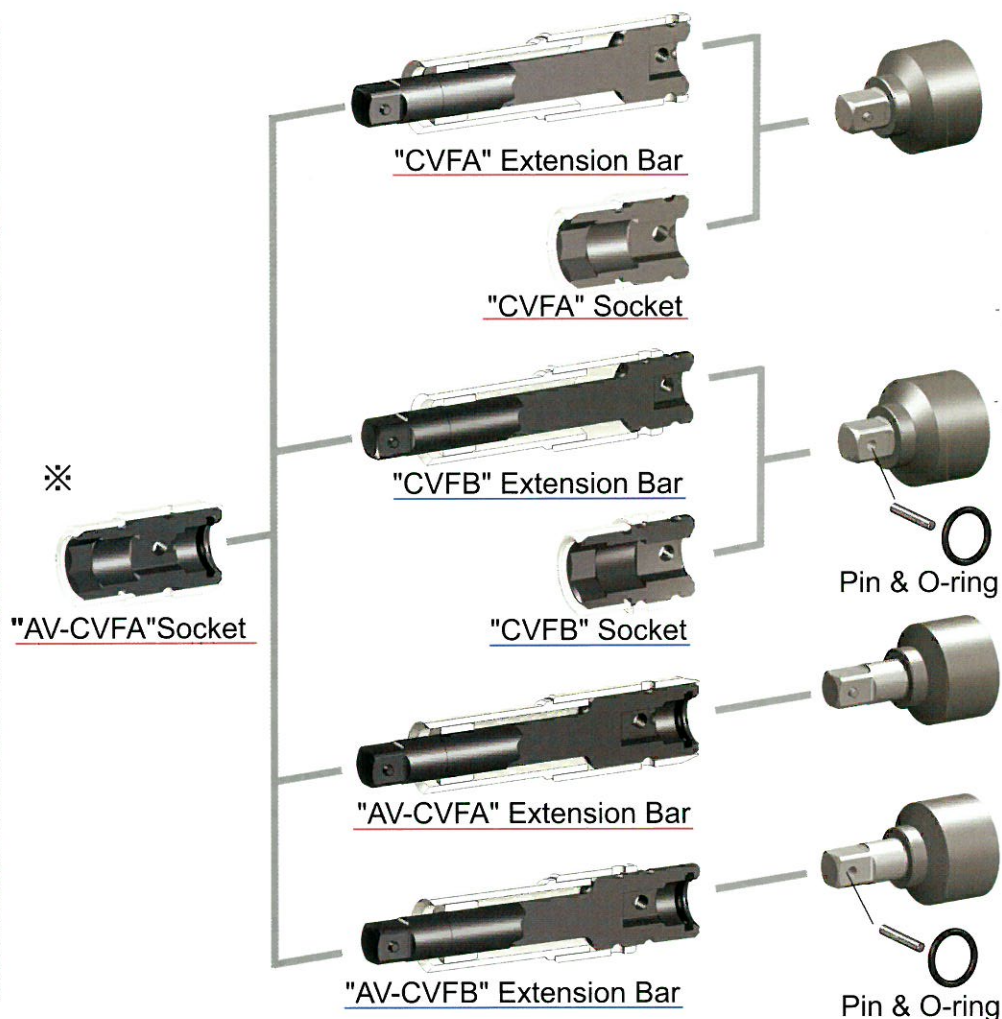


※ Connecting with the extension bar, the socket must be "AV-CVFA" type.

CVFA-Type

● CVFA Short type

■ 9.52mm (3/8")
■ 12.7mm (1/2")




【Spec.】

Part No.	SQ (mm)	H (mm)	φ D1 (mm)	φ D2 (mm)	L (mm)
CVFA-31040	9.52	10	18	24	40
CVFA-31240	9.52	12	21	24	40
CVFA-31340	9.52	13	22	24	40
CVFA-31440	9.52	14	25	24	40
CVFA-41240	12.7	12	21	29	40
CVFA-41340	12.7	13	22	29	40
CVFA-41440	12.7	14	25	29	40
CVFA-41540	12.7	15	26	29	40
CVFA-41742	12.7	17	28	29	42

● CVFA MF Magnet type

■ 9.52mm (3/8")
■ 12.7mm (1/2")




【Spec.】

Part No.	SQ (mm)	H (mm)	φ D1 (mm)	φ D2 (mm)	L (mm)
CVFA-310MF50	9.52	10	18	24	50
CVFA-312MF50	9.52	12	21	24	50
CVFA-313MF50	9.52	13	22	24	50
CVFA-314MF50	9.52	14	25	24	50
CVFA-412MF75	12.7	12	21	29	75
CVFA-413MF75	12.7	13	22	29	75
CVFA-414MF75	12.7	14	25	29	75
CVFA-415MF75	12.7	15	26	29	75
CVFA-417MF75	12.7	17	28	29	75

● AV-CVFA Short type

■ 9.52mm (3/8")
■ 12.7mm (1/2")

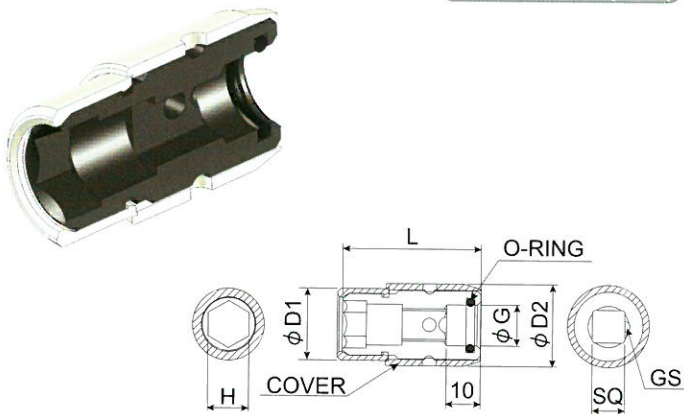


【Spec.】

Part No.	SQ (mm)	H (mm)	ϕD1 (mm)	ϕD2 (mm)	ϕG (mm)	L (mm)
AV-CVFA-31040	9.52	10	18	24	12	40
AV-CVFA-31240	9.52	12	21	24	12	40
AV-CVFA-31340	9.52	13	22	24	12	40
AV-CVFA-31440	9.52	14	25	24	12	40
AV-CVFA-41250	12.7	12	21	29	16	50
AV-CVFA-41350	12.7	13	22	29	16	50
AV-CVFA-41450	12.7	14	25	29	16	50
AV-CVFA-41550	12.7	15	26	29	16	50
AV-CVFA-41750	12.7	17	28	29	16	50

● AV-CVFA MF Magnet type

■ 9.52mm (3/8")
■ 12.7mm (1/2")

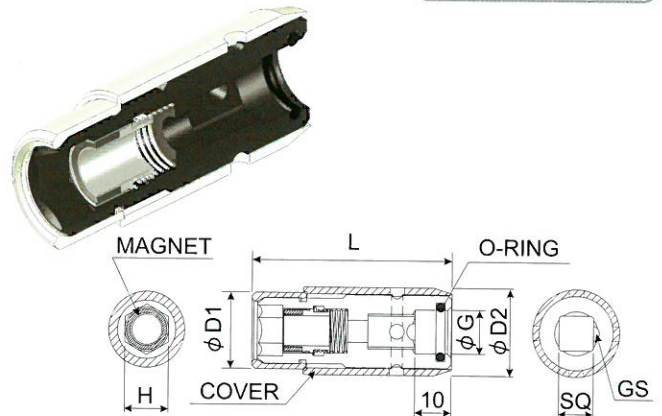


【Spec.】

Part No.	SQ (mm)	H (mm)	ϕD1 (mm)	ϕD2 (mm)	ϕG (mm)	L (mm)
AV-CVFA-310MF50	9.52	10	18	24	12	50
AV-CVFA-312MF50	9.52	12	21	24	12	50
AV-CVFA-313MF50	9.52	13	22	24	12	50
AV-CVFA-314MF50	9.52	14	25	24	12	50
AV-CVFA-412MF75	12.7	12	21	29	16	75
AV-CVFA-413MF75	12.7	13	22	29	16	75
AV-CVFA-414MF75	12.7	14	25	29	16	75
AV-CVFA-415MF75	12.7	15	26	29	16	75
AV-CVFA-417MF75	12.7	17	28	29	16	75

● CVFA Extension Bar

■ 9.52mm (3/8")
■ 12.7mm (1/2")

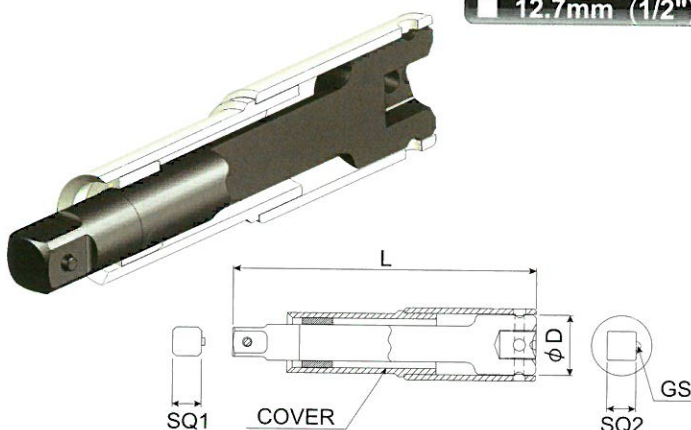


【Spec.】

Part No.	SQ1 (mm)	SQ2 (mm)	ϕD (mm)	L (mm)
CVFA-310E	9.52	9.52	24	100
CVFA-315E	9.52	9.52	24	150
CVFA-320E	9.52	9.52	24	200
CVFA-410E	12.7	12.7	29	100
CVFA-415E	12.7	12.7	29	150
CVFA-420E	12.7	12.7	29	200

● AV-CVFA Extension Bar

■ 9.52mm (3/8")
■ 12.7mm (1/2")

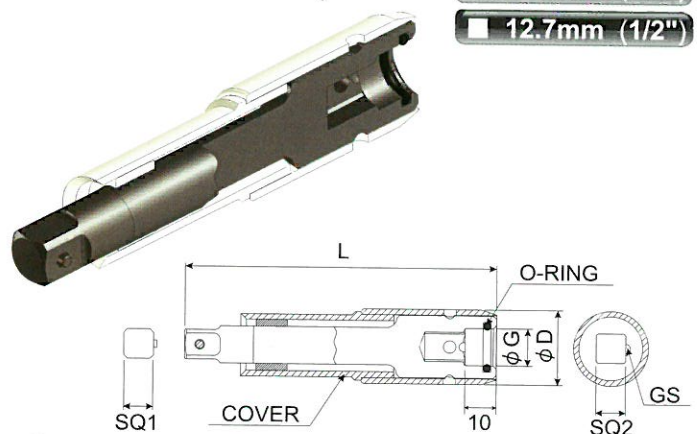

【Spec.】


Part No.	SQ1 (mm)	SQ2 (mm)	ϕD (mm)	ϕG (mm)	L (mm)
AV-CVFA-310E	9.52	9.52	24	12	100
AV-CVFA-315E	9.52	9.52	24	12	150
AV-CVFA-320E	9.52	9.52	24	12	200
AV-CVFA-410E	12.7	12.7	29	16	100
AV-CVFA-415E	12.7	12.7	29	16	150
AV-CVFA-420E	12.7	12.7	29	16	200

CVFB-Type

● CVFB Short type

■ 9.52mm (3/8")

■ 12.7mm (1/2")

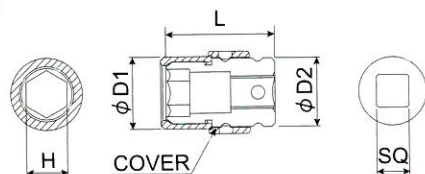



【Spec.】

Part No.	SQ (mm)	H (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CVFB-31040	9.52	10	18	20	40
CVFB-31240	9.52	12	21	20	40
CVFB-31340	9.52	13	22	20	40
CVFB-31440	9.52	14	25	20	40
CVFB-41240	12.7	12	21	25	40
CVFB-41340	12.7	13	22	25	40
CVFB-41440	12.7	14	25	25	40
CVFB-41540	12.7	15	26	25	40
CVFB-41742	12.7	17	28	25	42

● CVFB MF Magnet type

■ 9.52mm (3/8")

■ 12.7mm (1/2")

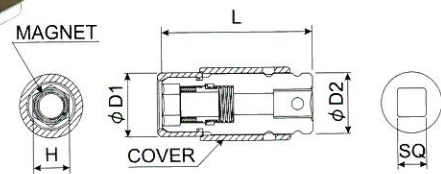



【Spec.】

Part No.	SQ (mm)	H (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CVFB-310MF50	9.52	10	18	20	50
CVFB-312MF50	9.52	12	21	20	50
CVFB-313MF50	9.52	13	22	20	50
CVFB-314MF50	9.52	14	25	20	50
CVFB-412MF75	12.7	12	21	25	75
CVFB-413MF75	12.7	13	22	25	75
CVFB-414MF75	12.7	14	25	25	75
CVFB-415MF75	12.7	15	26	25	75
CVFB-417MF75	12.7	17	28	25	75

● CVFB Extension Bar

■ 9.52mm (3/8")

■ 12.7mm (1/2")

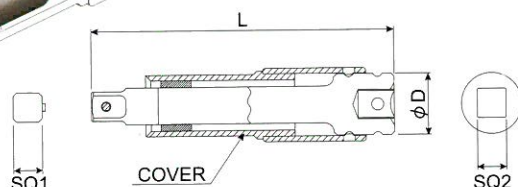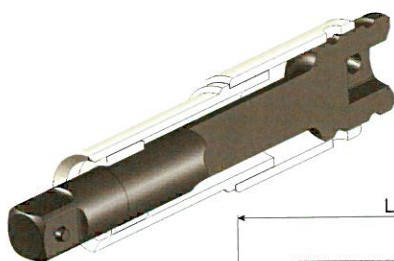



【Spec.】

Part No.	SQ1 (mm)	SQ2 (mm)	φD (mm)	L (mm)
CVFB-310E	9.52	9.52	20	100
CVFB-315E	9.52	9.52	20	150
CVFB-320E	9.52	9.52	20	200
CVFB-410E	12.7	12.7	25	100
CVFB-415E	12.7	12.7	25	150
CVFB-420E	12.7	12.7	25	200

● AV-CVFB Extension Bar

■ 9.52mm (3/8")

■ 12.7mm (1/2")

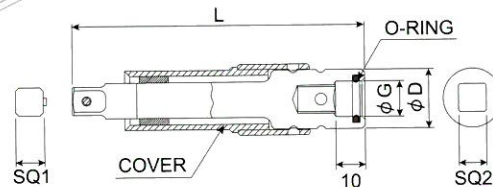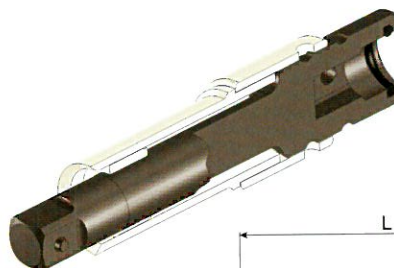

【Spec.】

Part No.	SQ1 (mm)	SQ2 (mm)	φD (mm)	φG (mm)	L (mm)
AV-CVFB-310E	9.52	9.52	20	12	100
AV-CVFB-315E	9.52	9.52	20	12	150
AV-CVFB-320E	9.52	9.52	20	12	200
AV-CVFB-410E	12.7	12.7	25	16	100
AV-CVFB-415E	12.7	12.7	25	16	150
AV-CVFB-420E	12.7	12.7	25	16	200



CERTIFICATED COMPANY

NAGAHORI INDUSTRY CO., LTD.



10000 SE Pine Street - Portland, Oregon 97216
Phone: 1-800-852-1368


Solution Socket Series

TORX® 8mm-type




- This is the solution for the breakage of bigger size of torx sockets.
- In order to escape the risk of damage caused by the higher fastening torque, we recommend the combination of 8mm drive bits and this specialized bit holder.
- MSH holder is applicable.

Combination full length table



«Bit Holder / Conventional type»


Bit Length (mm)		Total Length (mm)	
		DC-38S	DC-48S
55	→	(72.5)	(75.5)
85	→	(102.5)	(105.5)

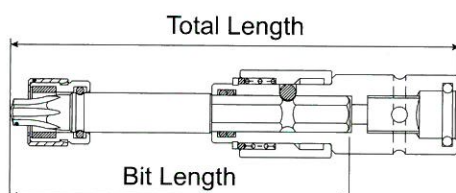

«Bit Holder / AV type»

Bit Length (mm)		Total Length (mm)	
		AVDC-38S	AVDC-48S
55	→	(82.5)	(85.5)
85	→	(112.5)	(115.5)

● Bit Holder for 8mm Drive Bits

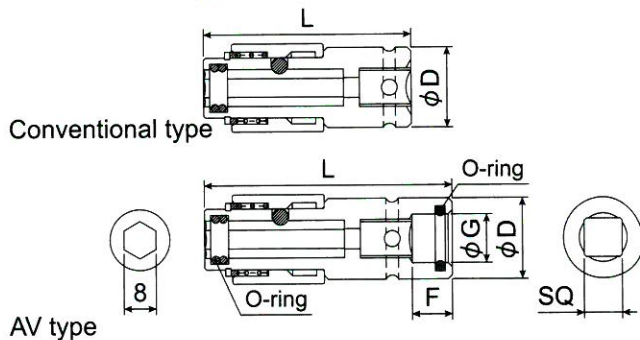

■ 9.52mm (3/8")


■ 12.7mm (1/2")

【Spec.】

Part No.	SQ (mm)	ϕ D (mm)	F (mm)	ϕ G (mm)	L (mm)
DC-38S	9.52	20	—	—	52
DC-48S	12.7	25	—	—	55
AVDC-38S	9.52	20	10	12	62
AVDC-48S	12.7	25	10	16	65

Applicable Bits : 8mm Drive

● Torx 8mm Drive Bits - GR type -

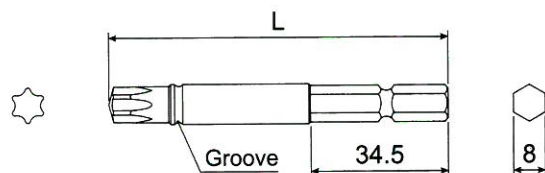

★ TORX®

● 8.00mm (5/16")

【Spec.】

Part No.	Driver Size	★ A (mm) Ref.	L (mm)
8GR-T40X55	T40	6.60	55
8GR-T40X85	T40	6.60	85
8GR-T45X55	T45	7.77	55
8GR-T45X85	T45	7.77	85
8GR-T50X55	T50	8.79	55
8GR-T50X85	T50	8.79	85
8GR-T55X55	T55	11.2	55
8GR-T55X85	T55	11.2	85

● Magnet Screw Holder for 8mm Drive Bits



【Standard Spec.】

We offer the specials on your request.

Part No.	Applicable TORX® Bits
MSHT45-8	8GR-T40 , T45 , T50
MSHT56-8	8GR-T55

NAC
NAGAHORI INDUSTRY CO.,LTD.

AIMCO

10000 SE Pine Street - Portland, Oregon 97216
Phone: 1-800-852-1368

Solution Socket Series


CVF Bit attachment - type

SAFETY ANTI-MAR PROTECTION



- The fully protective cover gives a highest benefit to the operators who could escape from injury in fingers. = **SAFETY**
- The resin material of protective cover spinning freely protects against marring. = **ANTI-MARRING**

● Driver Sockets

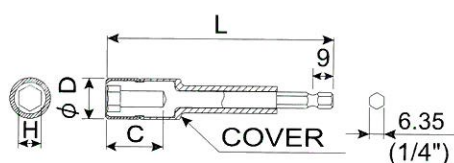


【Spec.】

B-30B TYPE **6.35mm (1/4")**

Part No.	H (mm)	φD (mm)	C (mm)	L (mm)
CVF-3B1010	10	17	26	100
CVF-3B1210	12	21	26	100
CVF-3B1310	13	22	26	100
CVF-3B1410	14	23	25	100
CVF-3B1510	15	25	25	100
CVF-3B1710	17	28	25	100

● Driver Sockets with MF-Magnet


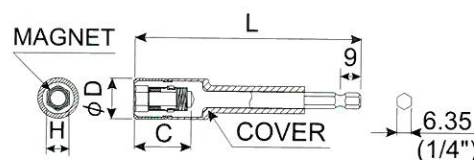


【Spec.】

B-30B TYPE **6.35mm (1/4")**

Part No.	H (mm)	φD (mm)	C (mm)	L (mm)
CVF-3BMF1010	10	18	25	100
CVF-3BMF1210	12	21	25	100
CVF-3BMF1310	13	22	30	100
CVF-3BMF1410	14	23	31	100
CVF-3BMF1510	15	25	29	100
CVF-3BMF1710	17	28	30	100

● Bit Holder for 6.35mm Drive Bits

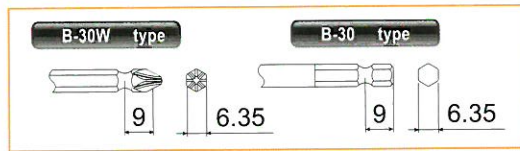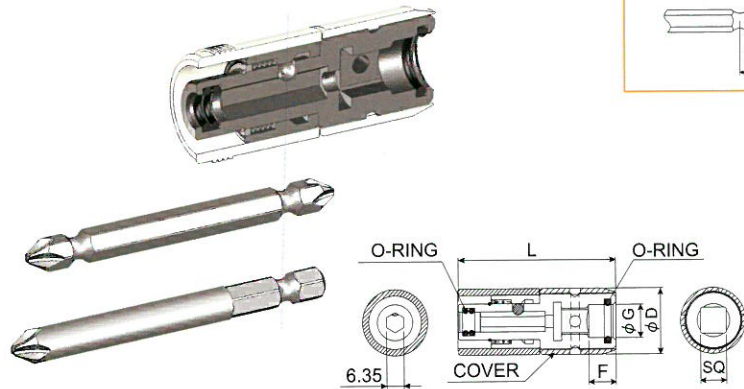


【Spec.】

Part No.	SQ (mm)	φD (mm)	F (mm)	φG (mm)	L (mm)
CVF-DC-3SO	9.52	24	-	-	50
CVF-DC-4SO	12.7	24	-	-	55
CVF-AVDC-3SO	9.52	24	10	12	60
CVF-AVDC-4SO	12.7	24	10	16	65

★ Applicable Bits : B-30, B-30W(6.35mm)Type

● Bit Through Sockets (One Touch - type)

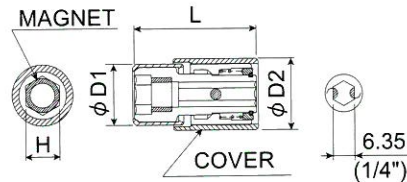


【Spec.】

Part No.	H (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CVF-BTS10RMS	10	18	20	36
CVF-BTS12RMS	12	21	20	36
CVF-BTS13RMS	13	22	20	36
CVF-BTS14RMS	14	25	20	38

★ Applicable Bits : B-30W(6.35mm)Type

● Bit Through Sockets (Single - type)

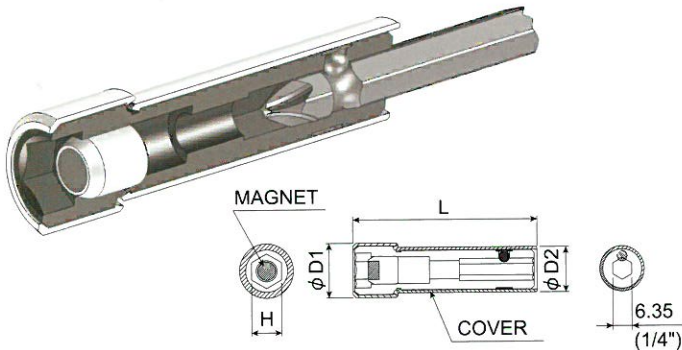


【Spec.】

Part No.	H (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CVF-BTSM08	8	15	17	60
CVF-BTSM10	10	18	18	60
CVF-BTSM12	12	21	18	60
CVF-BTSM13	13	22	18	60
CVF-BTSM14	14	23	18	60

★ Applicable Bits : B-30W(6.35mm)Type

● Bit Through Sockets (Double - type)

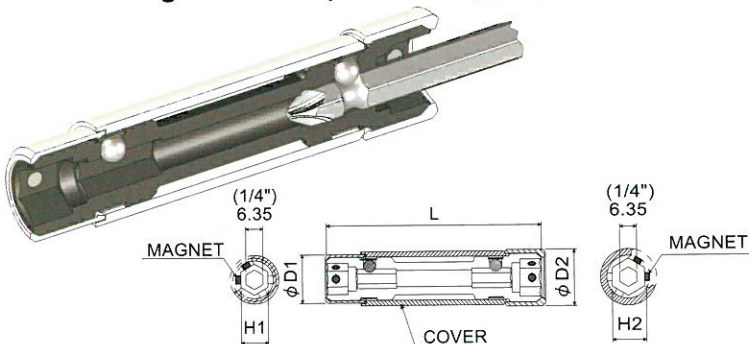

【Spec.】

Part No.	H1 (mm)	H2 (mm)	φD1 (mm)	φD2 (mm)	L (mm)
CVF-BTWSM0810	8	10	17	17	70
CVF-BTWSM1012	10	12	18	21	80

★ Applicable Bits : B-30W(6.35mm)Type

NAC
NAGAHORI INDUSTRY CO.,LTD.

Specifications subject to change without notice.
Printed in Japan Lef. No.SSS-041

AIMCO

10000 SE Pine Street - Portland, Oregon 97216
Phone: 1-800-852-1368



SOLUTION CATALOG OF Bits & Bits parts




Version No.SB-01

Solution Bits

● **Extra Durability Bits** «New nose geometry design»


● **6.35mm**

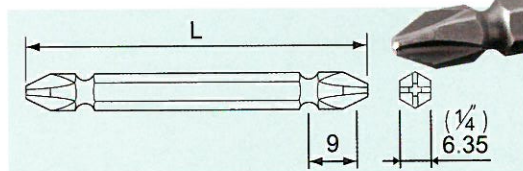

B-30W TYPE

【Spec.】

Part No.	Point Size	L (mm)	Applicable MSH
3WP2075	Ph.2	75	MSH3WC
3WP2100	Ph.2	100	MSH3WC
3WP2150	Ph.2	150	MSH3WC

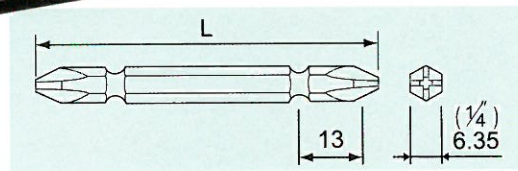


B-40W TYPE

【Spec.】

Part No.	Point Size	L (mm)	Applicable MSH
4WP2065	Ph.2	65	MSH4WC
4WP2110	Ph.2	110	MSH4WC
4WP2150	Ph.2	150	MSH4WC

MSH (Magnetic Screw Holder)

● **for Bits - Ph.2 -**

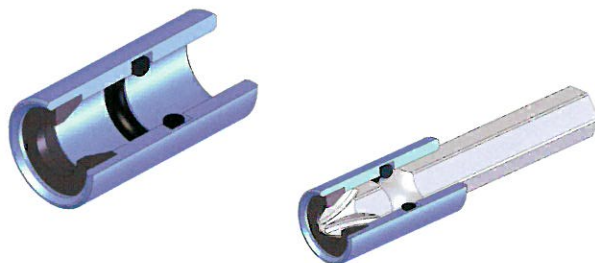

【Standard Spec.】

Part No.	Applicable Bits
MSH3WC	B-30W — Ph.2
MSH4WC	B-40W — Ph.2

We offer the specials on your request.

Magnetic HOTARU

● **for Bits - B-30W, B-40W -**



An inside O-ring holds the magnetic holder firmly at any position.

【Standard Spec.】


Part No.	Applicable Bits
MAG HOTARU	B-30W, B-40W

Electric Driver Bits

● **Ph.2 Bits**

● **5.00mm**

B-10W TYPE

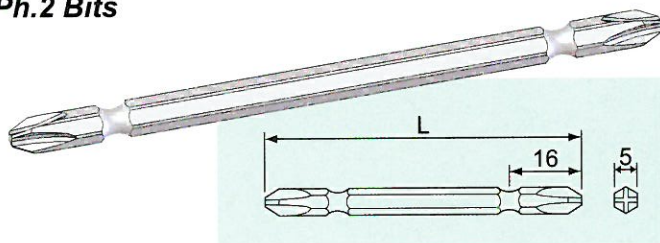


【Spec.】

Part No.	Point Size	L (mm)	Applicable MSH
1W2100	Ph.2	100	MSH1WC
1W2150	Ph.2	150	MSH1WC

MSH (Magnetic Screw Holder)

● **for Ph.2 Bits - B-10W -**

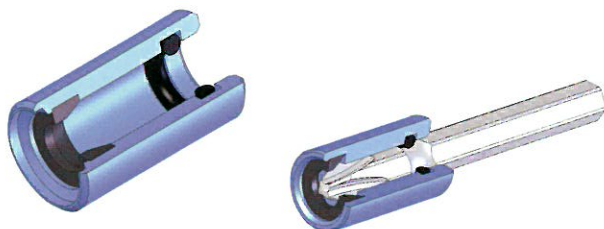

【Standard Spec.】

Part No.	Applicable Bits
MSH1WC	B-10W

We offer the specials on your request.

The cost of re-works caused by mar-damage is highly reduced.
Besides magnetization, MSH is effective in mar resistant and in prevention from slantingly tightening.



The conventional bit without MSH sometimes does damage to the surface of the work, when slipping out of the screw.



MSH holder holds the screw straight, aiming at the fastening position.




MSH protects the surface of the work from marring caused by cam-out.

Electric Driver Bits - GR type -

● GR type Bits (Groove designed) «New nose geometry design»

5.00mm

B-10 TYPE

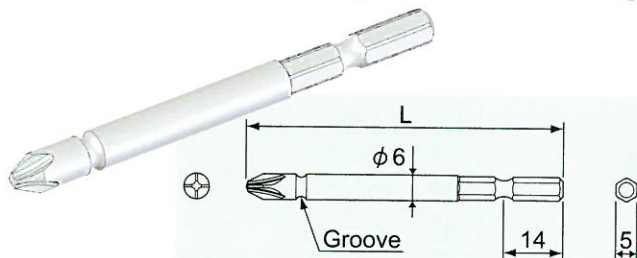


【Spec.】

Part No.	Point Size	L (mm)	Applicable MSH
GR1-Ph.2x70	Ph.2	70	MSH φ6
GR1-Ph.2x100	Ph.2	100	MSH φ6
GR1-Ph.2x150	Ph.2	150	MSH φ6

● GR type Bits (Groove designed) «New nose geometry design» HIOS Shank

H4 (φ4mm)

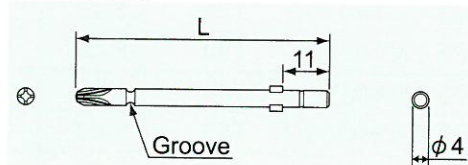


【Spec.】

Part No.	Point Size	L (mm)	Applicable MSH
GRH4-Ph.2x60	Ph.2	60	MSH φ4
GRH4-Ph.2x100	Ph.2	100	MSH φ4

● GR type Bits (Groove designed) «New nose geometry design» HIOS Shank

H5 (φ5mm)

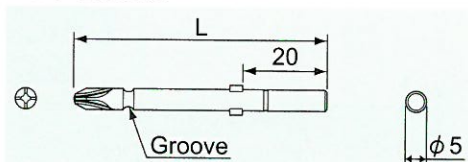

【Spec.】

Part No.	Point Size	L (mm)	Applicable MSH
GRH5-Ph.2x60	Ph.2	60	MSH φ5
GRH5-Ph.2x100	Ph.2	100	MSH φ5

MSH (Magnetic Screw Holder)

● for Electric Driver Bits - GR type -




【Standard Spec.】

Part No.	Applicable Bits
MSH φ4	GR — H4 — Ph.2
MSH φ5	GR — H5 — Ph.2
MSH φ6	GR — B-10 — Ph.2


We offer the specials on your request.

TORX® Bits


● Standard type

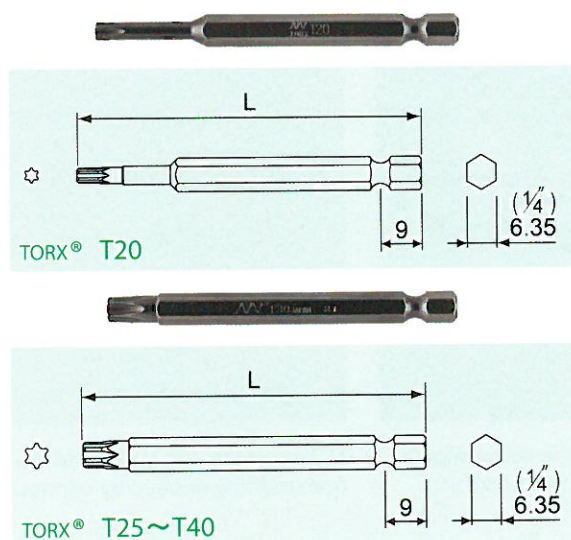

● Tamper resistant type

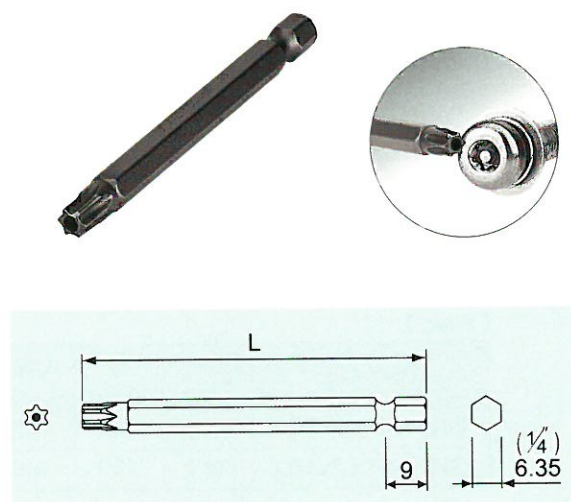

● Standard type

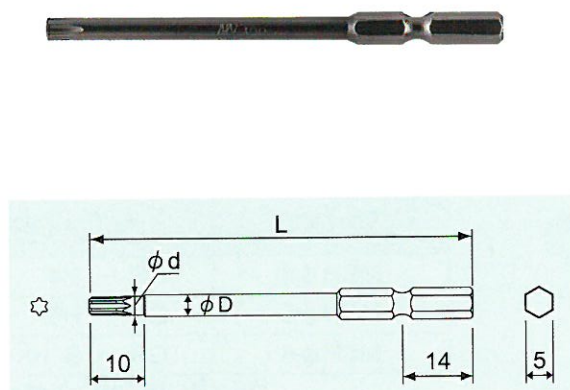

6.35mm

B-30 TYPE

【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	L (mm)
B3-T20x75	T20	3.84	75
B3-T20x100	T20	3.84	100
B3-T25x75	T25	4.40	75
B3-T25x100	T25	4.40	100
B3-T25x150	T25	4.40	150
B3-T30x75	T30	5.49	75
B3-T30x100	T30	5.49	100
B3-T30x150	T30	5.49	150
B3-T40x75	T40	6.60	75
B3-T40x100	T40	6.60	100
B3-T40x150	T40	6.60	150

6.35mm

B-30 TYPE

【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	L (mm)
B3-T20Hx75	T20	3.84	75
B3-T20Hx100	T20	3.84	100
B3-T25Hx75	T25	4.40	75
B3-T25Hx100	T25	4.40	100
B3-T25Hx150	T25	4.40	150
B3-T30Hx75	T30	5.49	75
B3-T30Hx100	T30	5.49	100
B3-T30Hx150	T30	5.49	150
B3-T40Hx75	T40	6.60	75
B3-T40Hx100	T40	6.60	100
B3-T40Hx150	T40	6.60	150

5.00mm



B-10 TYPE

【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	φd (mm)	φD (mm)	L (mm)
B1-T6x75	T6	1.65	2.2	3.0	75
B1-T6x100	T6	1.65	2.2	3.0	100
B1-T8x75	T8	2.30	2.5	3.0	75
B1-T8x100	T8	2.30	2.5	3.0	100
B1-T10x75	T10	2.72	3.0	4.0	75
B1-T10x100	T10	2.72	3.0	4.0	100
B1-T15x75	T15	3.26	3.5	4.0	75
B1-T15x100	T15	3.26	3.5	4.0	100
B1-T20x75	T20	3.84	4.0	4.0	75
B1-T20x100	T20	3.84	4.0	4.0	100
B1-T25x75	T25	4.40	5.0	5.0	75
B1-T25x100	T25	4.40	5.0	5.0	100

TORX® Bits - GR type -

●GR type Bits (Groove designed)

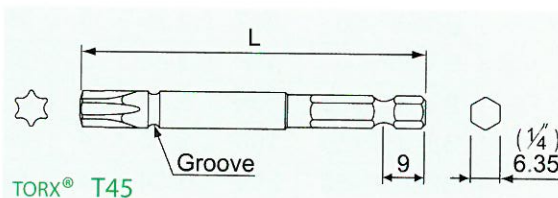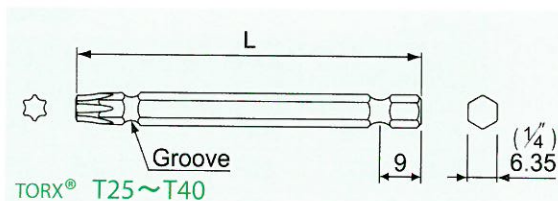

MSH (Magnetic Screw Holder)

●for TORX® Bits - GR type -



We offer the specials on your request.

B-30 TYPE

● 6.35mm

【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	L (mm)	Applicable MSH
GR3-T25x75	T25	4.40	75	MSHT25
GR3-T25x100	T25	4.40	100	MSHT25
GR3-T25x150	T25	4.40	150	MSHT25
GR3-T30x75	T30	5.49	75	MSHT30-T40
GR3-T30x100	T30	5.49	100	MSHT30-T40
GR3-T30x150	T30	5.49	150	MSHT30-T40
GR3-T40x75	T40	6.60	75	MSHT30-T40
GR3-T40x100	T40	6.60	100	MSHT30-T40
GR3-T40x150	T40	6.60	150	MSHT30-T40
GR3-T45x75	T45	7.77	75	MSHT45




【Standard Spec.】

Part No.	Applicable TORX® Bits
MSHT25	GR3 - T25
MSHT30-T40	GR3 - T30
	GR3 - T40
MSHT45	GR3 - T45

TORX® Bits

●HIOS Shank Bits φ5

● H5 (φ5mm)

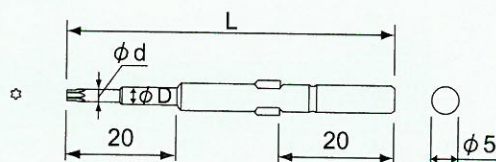


【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	φd (mm)	φD (mm)	L (mm)
H5-T8x60	T8	2.30	2.5	3.0	60
H5-T10x60	T10	2.72	3.0	4.0	60
H5-T15x60	T15	3.26	3.5	4.0	60
H5-T20x60	T20	3.84	4.0	4.0	60
H5-T25x60	T25	4.40	5.0	5.0	60

●HIOS Shank Bits φ4

● H4 (φ4mm)

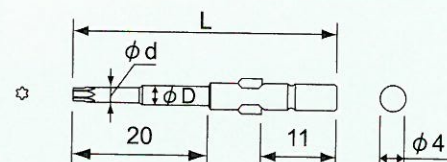


【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	φd (mm)	φD (mm)	L (mm)
H4-T5x40	T5	1.37	1.8	3.0	40
H4-T6x40	T6	1.65	2.2	3.0	40
H4-T8x40	T8	2.30	2.5	3.0	40
H4-T10x40	T10	2.72	3.0	4.0	40

●Delvo Shank Bits



● DB (φ4mm)

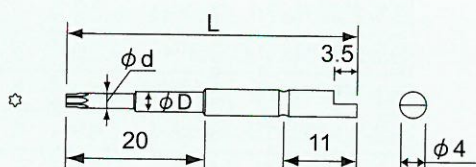

【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	φd (mm)	φD (mm)	L (mm)
DB-T5x44	T5	1.37	1.8	3.0	44
DB-T6x44	T6	1.65	2.2	3.0	44
DB-T8x44	T8	2.30	2.5	3.0	44
DB-T8x64	T8	2.30	2.5	3.0	64
DB-T10x44	T10	2.72	3.0	4.0	44
DB-T10x64	T10	2.72	3.0	4.0	64

TORX Plus® Bits

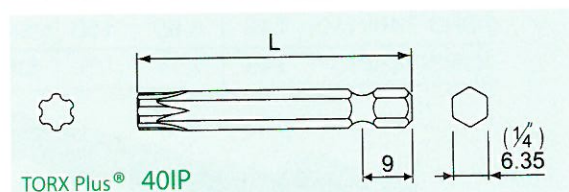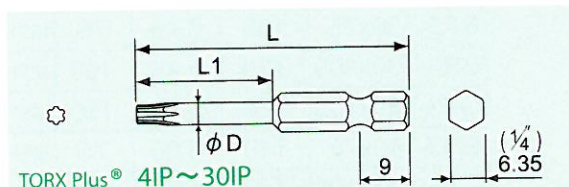

6.35mm


B-30 TYPE

【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	φD (mm)	L1 (mm)	L (mm)
B3-4IPx50	4IP	1.29	2	25	50
B3-5IPx50	5IP	1.41	2.5	25	50
B3-6IPx50	6IP	1.69	2.5	25	50
B3-7IPx50	7IP	1.97	3	25	50
B3-8IPx50	8IP	2.29	3	25	50
B3-9IPx50	9IP	2.48	3	25	50
B3-10IPx50	10IP	2.72	3	25	50
B3-15IPx50	15IP	3.25	4	25	50
B3-20IPx50	20IP	3.84	4	10	50
B3-25IPx50	25IP	4.39	5	10	50
B3-30IPx50	30IP	5.49	6	10	50
B3-40IPx50	40IP	6.60	—	—	50

HIOS Shank Bits φ4

H4 (φ4mm)

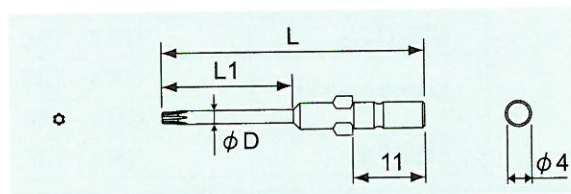


【Spec.】

Part No.	Driver Size	✱A (mm) Ref.	φD (mm)	L1 (mm)	L (mm)
H4-4IPx40	4IP	1.29	2	20	40
H4-5IPx40	5IP	1.41	2	20	40
H4-6IPx40	6IP	1.69	2	20	40

Delvo Shank Bits

DB (φ4mm)

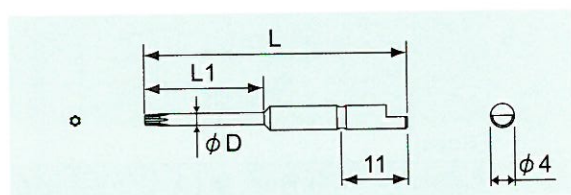

【Spec.】


Part No.	Driver Size	✱A (mm) Ref.	φD (mm)	L1 (mm)	L (mm)
DB-4IPx44	4IP	1.29	2	20	40
DB-5IPx44	5IP	1.41	2	20	40
DB-6IPx44	6IP	1.69	2	20	40

Tamper resistant type

6.35mm



B-30 TYPE

【Spec.】

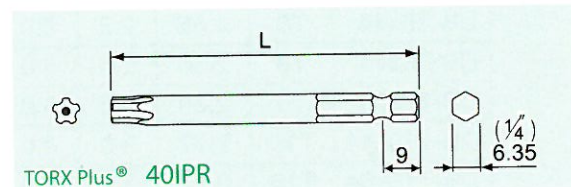

Part No.	Driver Size	✱A (mm) Ref.	φD (mm)	L1 (mm)	L (mm)
B3-20IPRx75	20IPR	3.84	4	10	75
B3-20IPRx100	20IPR	3.84	4	10	100
B3-25IPRx75	25IPR	4.39	5	10	75
B3-25IPRx100	25IPR	4.39	5	10	100
B3-30IPRx75	30IPR	5.49	6	10	75
B3-30IPRx100	30IPR	5.49	6	10	100
B3-40IPRx75	40IPR	6.60	—	—	75
B3-40IPRx100	40IPR	6.60	—	—	100

Bits for Electric Screwdriver

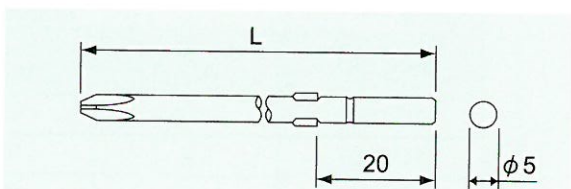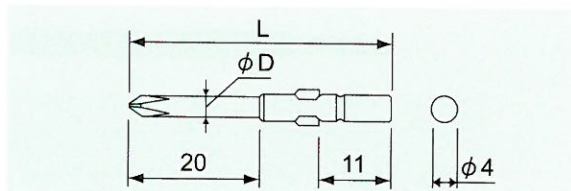

H4&H5


【Spec.】

Part No.	Point Size	L (mm)	φD (mm)
H4-0x40-2	Ph.0	40	2
H4-1x40-3	Ph.1	40	3
H4-2x40-4	Ph.2	40	4

【Spec.】

Part No.	Point Size	L (mm)
H5-1x60	Ph.1	60
H5-1x100	Ph.1	100
H5-2x60	Ph.2	60
H5-2x100	Ph.2	100

Bits for Electric Screwdriver

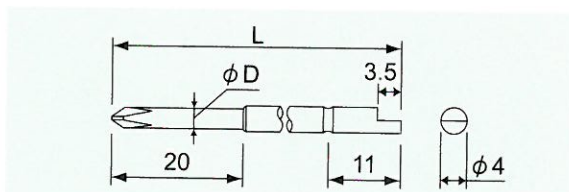


DB

【Spec.】

Part No.	Point Size	L (mm)	φD (mm)
DB0x44-1.8	Ph.0	44	1.8
DB0x64-1.8	Ph.0	64	1.8
DB0x44-2.5	Ph.0	44	2.5
DB1x44-3.0	Ph.1	44	3
DB1x64-3.0	Ph.1	64	3
DB1x44-4.0	Ph.1	44	4
DB2x44-4.0	Ph.2	44	4
DB2x64-4.0	Ph.2	64	4

Angle Bits

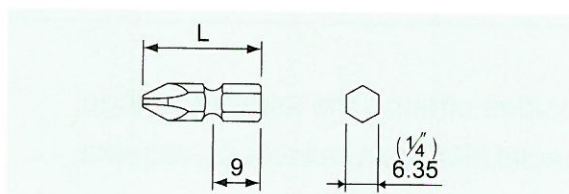


6.35mm

【Spec.】

B-35 TYPE


Part No.	Point Size	L (mm)
35S123	Ph.1	23
35S223	Ph.2	23
35S323	Ph.3	23

Bits for Automatic assembly machine

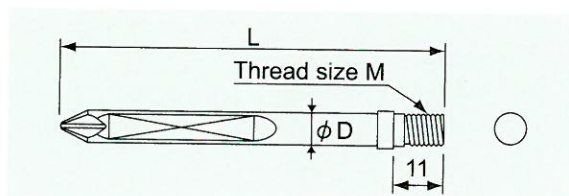

【Spec.】

Part No.	M	Point Size	L (mm)	φD (mm)
VXY5174	M5-P0.8	Ph.1	74	4
VXY5274	M5-P0.8	Ph.2	74	5
VXY6274	M6-P1.0	Ph.2	74	6

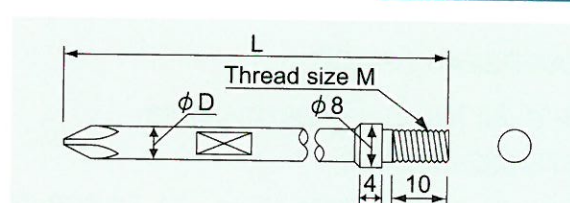

【Spec.】


Part No.	M	Point Size	L (mm)	φD (mm)
NXY6210	M6-P1.0	Ph.2	100	6

XY

Hexagon Bits

6.35mm


5.00mm

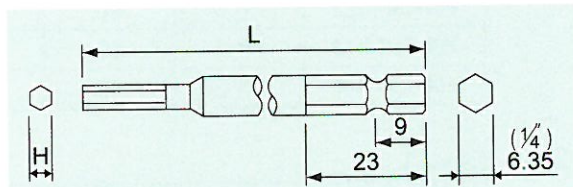

【Spec.】

B-30 TYPE

Part No.	H (mm)	L (mm)
3C1507	1.5	70
3C2007	2	70
3C2010	2	100
3C2507	2.5	70
3C2510	2.5	100
3C3007	3	70
3C3010	3	100
3C4007	4	70
3C4010	4	100
3C5007	5	70
3C5010	5	100
3C6007	6	70
3C6010	6	100
3C8007	8	70
3C8010	8	100
3C1007	10	70
3C1010	10	100

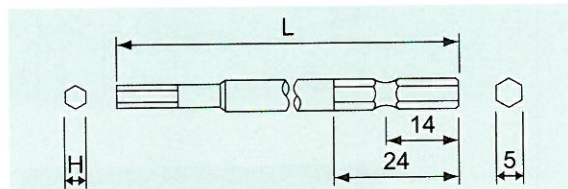

【Spec.】

B-10 TYPE

Part No.	H (mm)	L (mm)
1C1507	1.5	70
1C2007	2	70
1C2010	2	100
1C2507	2.5	70
1C2510	2.5	100
1C3007	3	70
1C3010	3	100
1C4007	4	70
1C4010	4	100
1C5007	5	70
1C5010	5	100



CERTIFICATED COMPANY

NAGAHORI INDUSTRY CO.,LTD.



10000 SE Pine Street - Portland, Oregon 97216
Phone: 1-800-852-1368

Specifications are subject to change without notice.

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are approximately 20 lines visible. The paper is slightly aged or off-white. The top edge of the paper shows some dark binding material.

[illegible]



AIMCO CORPORATE HEADQUARTERS

10000 SE PINE STREET
PORTLAND, OREGON 97216

PHONE: (503) 254-6600
TOLL FREE: 1-800-852-1368

AIMCO CORPORATION DE MEXICO SA DE CV

AVE. CRISTOBAL COLON 14529
CHIHUAHUA, CHIHUAHUA. 31125
MEXICO

PHONE : (01-614) 380-1010
FAX : (01-614) 380-1019

AIMCO CHINA

ROOM 607, NO.3998 HONGXIN RD,
DIBAO PLAZA, MINHANG DISTRICT,
SHANGHAI, 201103
CHINA

PHONE: 0086-21-34319246
FAX: 0086-21-34319245

AIMCO EUROPE

AVENIDA RÍO GALLO, 431
19174 GALÁPAGOS - GUADALAJARA
SPAIN

PHONE: +34 673 34 99 25

WWW.AIMCO-GLOBAL.COM

FASTENER