

AcraDyne[®]

A Division of AIMCO



HIGH CAPABILITY TOOLING

2017 / 18



AIMCO

For over 40 years AIMCO has been working with manufacturers around the world, we are the complete global source for all assembly, fastening, and critical bolting needs. AIMCO can effectively and swiftly meet your needs whether you're in Thailand fastening a 3 mm nut at 3 Nm, or in Tennessee, USA torquing the last lug nut. AIMCO provides the tools and solutions, on a global scale, that guarantee the success of your project. It is with great pride that AIMCO can say the products that we manufacture are **MADE IN THE USA.**

ISO 9001: 2015 Certified

Visit our NEW website www.aimco-global.com

TABLE OF CONTENTS

HIGH CAPABILITY TOOLING

CONTROLLED TOOLS

ACRADYNE®

GEN IV ACE CONTROLLER	4
CONTROLLER SOFTWARE	11
1000 SERIES NUTRUNNERS	12
1000, 2000, & 5000 SERIES PISTOL GRIP NUTRUNNERS	14
2000, 3000, & 5000 SERIES ANGLE NUTRUNNERS	15
2000, 3000, & 5000 SERIES INLINE NUTRUNNERS	16
5000 SERIES FIXTURED NUTRUNNERS	17
TUBENUT NUTRUNNERS AND SPECIALTY GEARHEADS	18
HOLD & DRIVE NUTRUNNERS	19
MID-EXIT CABLE NUTRUNNERS.	20
RIV NUTRUNNERS.	21
HT SERIES DC TOOLS	22
HT SERIES DC ANGLE TOOLS	23
HT SERIES DC DUAL LEVER AND GEARHEAD TOOLS	24
HT SERIES NOSE EXTENSIONS	25
HT SERIES DC TOOL ACCESSORIES.	25
DC TOOL / SPINDLE SELECTION GUIDE	26
CABLES AND ACCESSORIES	28
CORDLESS TOOLS.	31
ACRADYNE HT SERIES PNEUMATIC TOOLS	32
ACRADYNE HIGH-SPEED SERIES HT PNEUMATIC TOOLS	33

POWER TOOLS

ACRADYNE HT SERIES PNEUMATIC TOOL ACCESSORIES	36
---	----

TOOL SUPPORT SYSTEMS

AIR PREPARATION UNITS	37
GCI TORQUE REACTION ARMS	38

INDEX	40
------------------------	----



* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ERGO-DRIVE sockets are uniquely designed for repeatable, accurate rundowns. They also ensure excellent product quality, longer tool life, and better ergonomics for the tool user. Look for the ERGO-DRIVE **E** logo in this catalog to see where ERGO-DRIVE sockets/extensions benefit tool operation, operator, and rundown.

ACRADYNE GEN IV ACE CONTROLLER



AcraDyne's Gen IV ACE Controller provides a single platform that commands all transducerized tools in the AIMCO portfolio

AIR | CORDLESS | ELECTRIC



The same, simple programming for all tool types, including:

AcraDyne

- DC Tools
- Cordless Battery Tools

Uryu

- Air Powered Tools
- Cordless Battery Tools
- Electric Tools

- No additional controller training needed for different platforms (tool type specific knowledge is required)
- One common communication for your global data collection, line controls, and fieldbus platforms



ACRADYNE GEN IV ACE CONTROLLER

ACE controller provides ultimate **FLEXIBILITY** and **FREEDOM** to command tools for every application

One common communication for your global data collection, line controls, and fieldbus platforms.



ACRADYNE GEN IV ACE CONTROLLER

The AcraDyne Gen IV ACE controller is the culmination of more than 40 years of serving our industrial fastening customers with 15 years of designing and manufacturing DC tools that are Made in the USA. It is filled with countless advanced capabilities and features. The Gen IV ACE Controller is the core of the modular AcraDyne DC system. One controller will command any tool in the AcraDyne line from 0.5 Nm to 12,000 Nm, all with one cable.



Four Digit LED Torque Display:
Large numbers can be seen from a distance.

Secondary display allows user to easily set and toggle through information:

- Angle
- Engineering Units
- Bolt Count
- Job/Job Sequence

Parameter Set Display:
Displays current parameter set and enables user to quickly change by scrolling up or down.


Optional 7" Touch-Screen Display:

- Runs the same software on PC for ease of use.
- Real-Time Graphing.
- Selectable Run Screens


FEATURES AND BENEFITS

- Web browser based programming – Receive data on your PC, tablet, smartphone, or any other web-capable device. You can use more than one device at a time: Be in program mode on one device while reviewing real-time curves on another, while watching tool diagnostics on a third
- Multiple fastening strategies – Program up to 256 parameters with as many as 20 steps
- Jobs capability – 99. Event log – 5,000
- Backup & restore through USB or Ethernet
- Removable flash memory
- Assignable I/O (8 X 8)
- Rundown storage – 1,000,000
- Real-time curve viewing. Curve storage – 20,000

NETWORKING CAPABILITIES

- Ethernet Protocols including Open Protocol, Ethernet/IP & PFCS
- Modular field bus connectivity: PROFIBUS, DeviceNET, Modbus TCP, or any fieldbus offered by 
- Data collection
- Serial protocols and string output
- Bar code scanning & printing
- Multi-spindle synchronization

ACRADYNE GEN IV ACE CONTROLLER

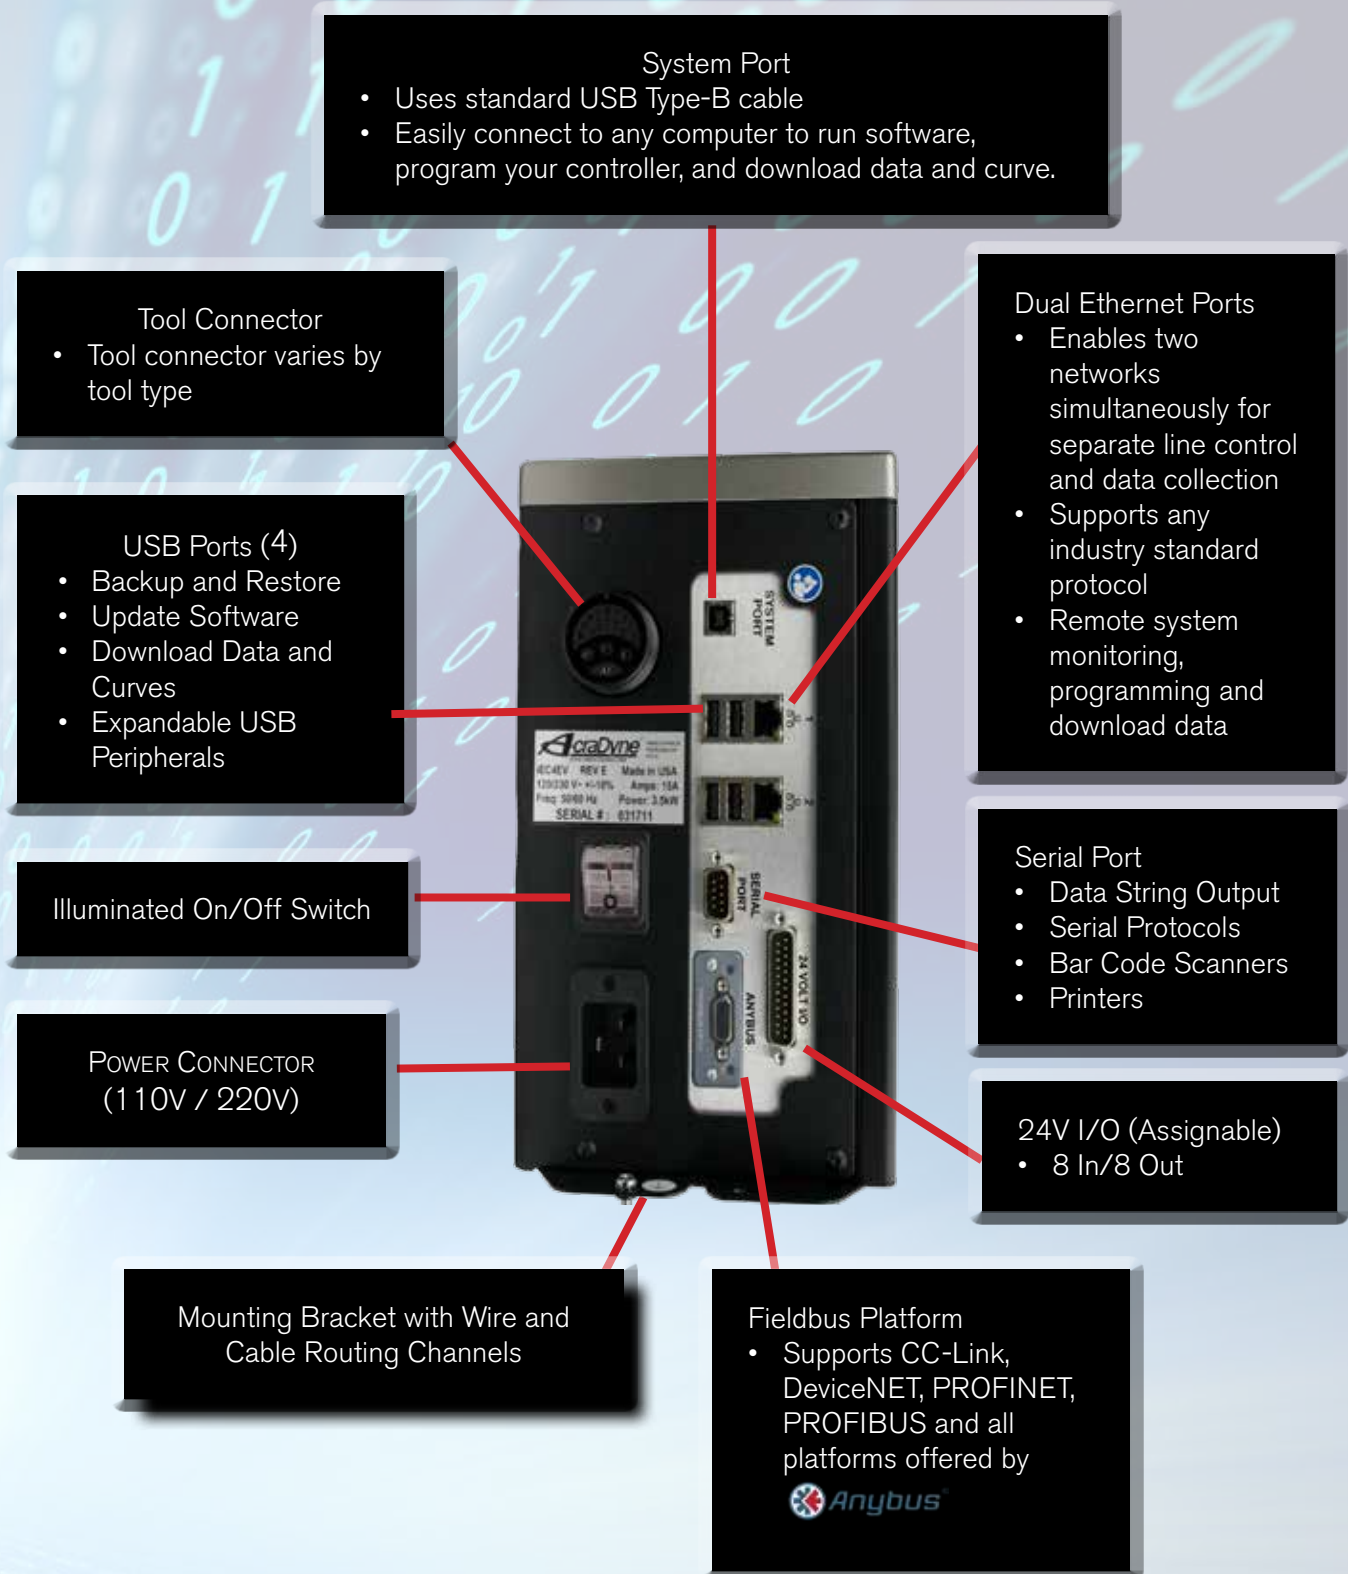

ACRADYNE GEN IV ACE CONTROLLER



GEN IV ACE iEC Controller for all AcraDyne DC Tools

MODEL	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET* TWO PORTS
iEC4E	X	L/D		X	X	X
iEC4EV	X	L/D	X	X	X	X
iEC4EG	X	L/D/G		X	X	X
iEC4EGV	X	L/D/G	X	X	X	X

* Ethernet channel supports the Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.

Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.



GEN IV ACE iAC Controller for Transducerized Uryu Air Tools

MODEL	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	SOLENOID SHUT OFF ON BOARD	PROGRAMMABLE REGULATOR ON BOARD	ETHERNET* TWO PORTS
iAC4E	X	L/D		X	X			X
iAC4EV	X	L/D	X	X	X			X
iAC4EG	X	L/D/G		X	X			X
iAC4EGV	X	L/D/G	X	X	X			X
iAC4ES	X	L/D		X	X	X		X
iAC4ESV	X	L/D	X	X	X	X		X
iAC4ESG	X	L/D/G		X	X	X		X
iAC4ESGV	X	L/D/G	X	X	X	X		X
iAC4ESR	X	L/D		X	X	X	X	X
iAC4ESRV	X	L/D	X	X	X	X	X	X
iAC4ESRG	X	L/D/G		X	X	X	X	X
iAC4ESRGV	X	L/D/G	X	X	X	X	X	X

* Ethernet channel supports the Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.

Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.

ACRADYNE GEN IV ACE CONTROLLER



GEN IV ACE iBC Controller for all AcraDyne and Uryu Transducerized Battery Tools

MODEL	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET* TWO PORTS
iBC4E	X	L/D		X	X	X
iBC4EV	X	L/D	X	X	X	X
iBC4EG	X	L/D/G		X	X	X
iBC4EGV	X	L/D/G	X	X	X	X

* Ethernet channel supports The Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.
 For fieldbus options, add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.
 Add (-Z) to model numbers for Zigbee Coordinator option.




ACRADYNE GEN IV ACE CONTROLLER

NETWORK CONNECTIVITY



DIMENSIONS

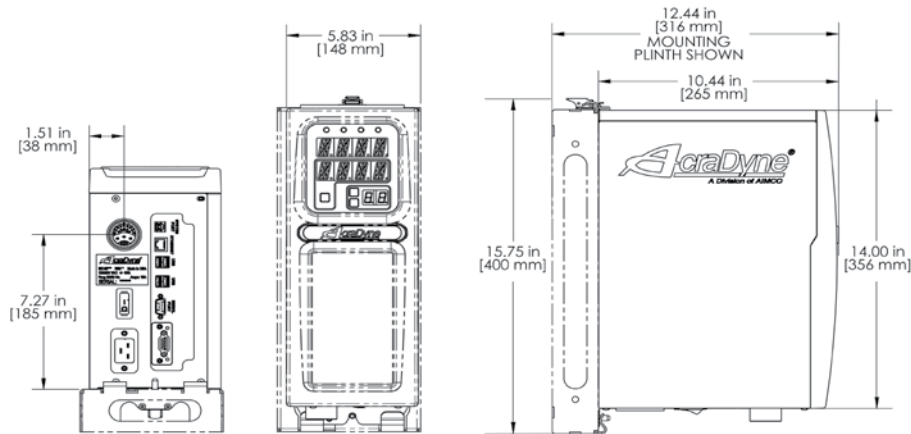


WIDTH	HEIGHT	DEPTH	WEIGHT
5.83 in / 148 mm	15.75 in / 400 mm	12.44 in / 316 mm	15.65 lbs / 7.1 kg

ACRADYNE CONTROLLER SOFTWARE

SOFTWARE

AcraDyne's software package is on-board every AcraDyne controller and is provided FREE of charge. This comprehensive, user-friendly program allows programming, analysis, and diagnostics.


The software is based on a standard web browser, allowing you to connect the AcraDyne controller with any computer, tablet, or smart device. Connect through Ethernet, USB, or wirelessly via a network connected to both devices.

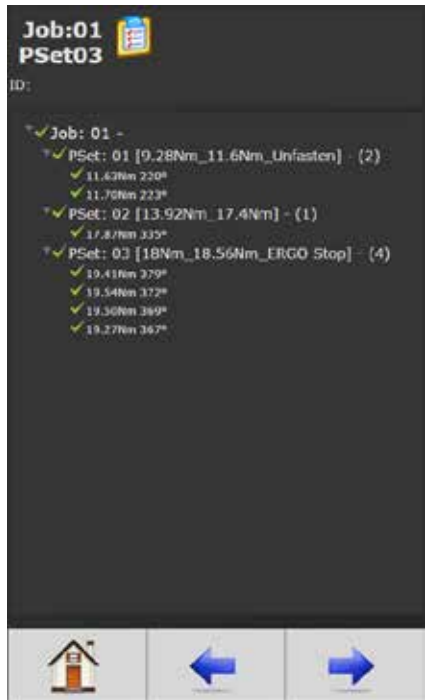

Adding and editing Parameter Sets (256) and Jobs (99) is easy and intuitive in the parameter set up function.



View curve results in real time or view stored results. As many as 10,000 curve results can be stored in memory.

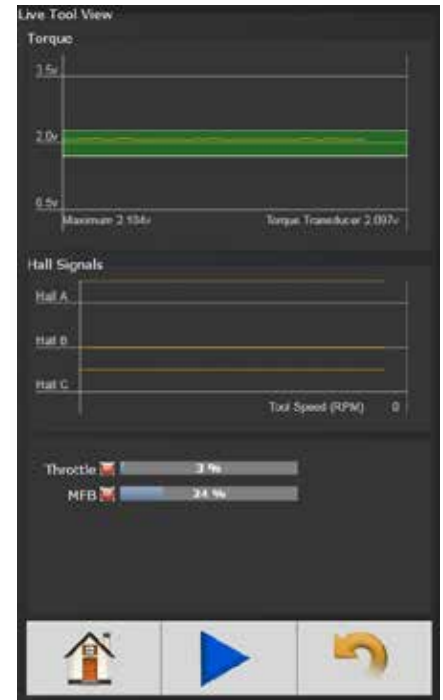

Tool programming and diagnostics for repair, calibration and advanced troubleshooting.



Choose from several run screens that display easy to view, large screen indicators.

ACRADYNE 1000 SERIES NUTRUNNERS

FEATURES AND BENEFITS

Superior size, speed, and duty cycle



Angle



In-line



Push-to-Start



Fixtured
Rear Exit
Cable



Fixtured
Bottom Exit
Cable



APPLICATION DATA


1000 SERIES	NM	MAX TORQUE FT-LB	NM	TORQUE RANGE FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET	KG	OUTPUT DRIVE
ANGLE*									
AEN4C12004B	4	3	1 - 4	0.7 - 3	3,111	2.0	0.91	1.00	1/4 Q.C.
AEN4C12009B	9	6.6	2.3 - 9	1.7 - 6.6	1,750	2.2	1.00	1.00	3/8 sq. dr.
AEN4C12014B	14	10	3.5 - 14	2.6 - 10	875	2.2	1.00	1.00	3/8 sq. dr.
AEN4C12018B	18	13	4.5 - 18	3.3 - 13	691	2.2	1.00	1.00	3/8 sq. dr.
AEN4C12022B	22	16	5.5 - 22	4.1 - 16	560	2.2	1.00	1.00	3/8 sq. dr.
IN-LINE**									
AES4A12003B(V)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	1.00	3/8 sq. dr.
AES4A12006B(V)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	1.00	3/8 sq. dr.
AES4A12011B(V)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	1.00	3/8 sq. dr.
AES4A12014B(V)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	1.00	3/8 sq. dr.
AES4A12018BV	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	1.00	3/8 sq. dr.
AES4A12022BV	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	1.00	3/8 sq. dr.
PUSH-TO-START									
AEL4A12003B(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	1.00	3/8 sq. dr.
AEL4A12006B(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	1.00	3/8 sq. dr.
AEL4A12011B(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	1.00	3/8 sq. dr.
AEL4A12014B(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	1.00	3/8 sq. dr.
AEL4A12018B	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	1.00	3/8 sq. dr.
AEL4A12022B	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	1.00	3/8 sq. dr.
FIXTURED***									
AEF4(A)(C)(X)12003B(B)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12006B(B)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12011B(B)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12014B(B)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12018B(B)	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12022B(B)	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	1.00	3/8 sq. dr.

* Add "F" to part numbers for flush socket.


** "V" indicates extended Ergo-Drive output  Replace "V" with "Q" for 1/4" quick change output.

*** Add "A" to part numbers for 1/2" sliding spindle models. Add "C" to part numbers for 1-3/4" sliding spindle models. Add "X" to part numbers for fixed 3/8" square drive output models.

*** Add "B" to part numbers for bottom exit cable.


*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE 1000 SERIES NUTRUNNERS

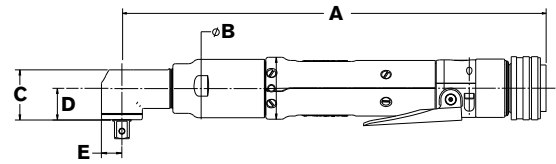


DIMENSIONS

ANGLE	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AEN4C12004B	11.65		295.9	1.47		37.3	.98		24.8	.62		15.8	.40		10.2
AEN4C12009B	11.00		279.5	1.47		37.3	1.29		32.8	.82		20.9	.52		13.1
AEN4C12014B	11.66		296.4	1.47		37.3	1.29		32.8	.82		20.9	.52		13.1
AEN4C12018B	11.66		296.4	1.47		37.3	1.29		32.8	.82		20.9	.52		13.1
AEN4C12022B	11.66		296.4	1.47		37.3	1.29		32.8	.82		20.9	.52		13.1

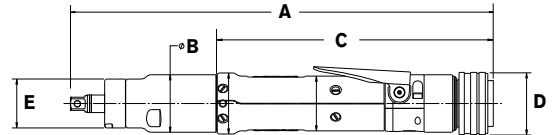

DIMENSIONS

INLINE	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AES4A12003B	11.12		282.7	1.47		37.3	7.38		187.5	1.59		40.4	1.25		31.8
AES4A12006B	11.12		282.7	1.47		37.3	7.38		187.5	1.59		40.4	1.25		31.8
AES4A12011B	11.44		290.5	1.47		37.3	7.38		187.5	1.59		40.4	1.25		31.8
AES4A12014B	11.44		290.5	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8
AES4A12018B	11.44		290.5	1.47		37.3	7.38		187.5	1.59		40.4	1.25		31.8
AES4A12022B	11.44		290.5	1.47		37.3	7.38		187.5	1.59		40.4	1.25		31.8
PUSH-TO-START	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AEL4A12003B	11.31		287.3	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8
AEL4A12006B	11.32		287.4	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8
AEL4A12011B	11.62		295.4	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8
AEL4A12014B	11.62		295.4	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8
AEL4A12018B	11.62		295.4	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8
AEL4A12022B	11.62		295.4	1.56		39.6	7.38		187.5	1.59		40.4	1.25		31.8

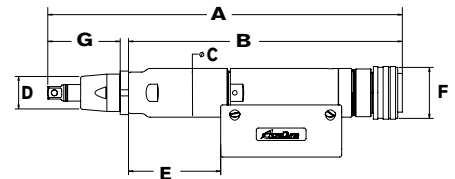

DIMENSIONS


FIXTURED	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM	IN	(F)	MM	IN	(G)	MM
AEF4A12003B	11.53		292.9	9.10		231.04	1.47		37.3	1.13		28.57	2.06		52.2	1.59		40.4	2.18		55.5
AEF4A12006B	11.53		292.9	9.10		231.04	1.47		37.3	1.13		28.57	2.06		52.2	1.59		40.4	2.18		55.5
AEF4A12011B	12.20		309.8	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	2.18		55.5
AEF4A12014B	12.20		309.8	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	2.18		55.5
AEF4A12018B	12.20		309.8	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	2.18		55.5
AEF4A12022B	12.20		309.8	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	2.18		55.5
AEF4C12003B	15.32		389.2	9.10		231.04	1.47		37.3	1.13		28.57	2.06		52.2	1.59		40.4	5.98		151.8
AEF4C12006B	15.32		389.2	9.10		231.04	1.47		37.3	1.13		28.57	2.06		52.2	1.59		40.4	5.98		151.8
AEF4C12011B	15.99		406.1	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	5.98		151.8
AEF4C12014B	15.99		406.1	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	5.98		151.8
AEF4C12018B	15.99		406.1	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	5.98		151.8
AEF4C12022B	15.99		406.1	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	5.98		151.8
AEF4X12003B	9.35		237.5	9.10		231.04	1.47		37.3	1.13		28.57	2.06		52.2	1.59		40.4	.80		20.4
AEF4X12006B	9.35		237.5	9.10		231.04	1.47		37.3	1.13		28.57	2.06		52.2	1.59		40.4	.80		20.4
AEF4X12011B	10.00		254.4	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	.80		20.4
AEF4X12014B	10.00		254.4	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	.80		20.4
AEF4X12018B	10.00		254.4	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	.80		20.4
AEF4X12022B	10.00		254.4	9.10		231.04	1.47		37.3	1.13		28.57	2.72		69.1	1.59		40.4	.80		20.4

ACRADYNE PISTOL GRIP NUTRUNNERS

FEATURES AND BENEFITS

- 1000 & 2000 series tools available with bottom exit, rear exit, or top exit cable configurations. 5000 series tools available in bottom exit or top exit models
- AcraDyne's multi-function button (MFB) provides increased flexibility
- On-board lights and audible signal for operator feedback
- Push-To-Start models also available

1000 & 2000 Series

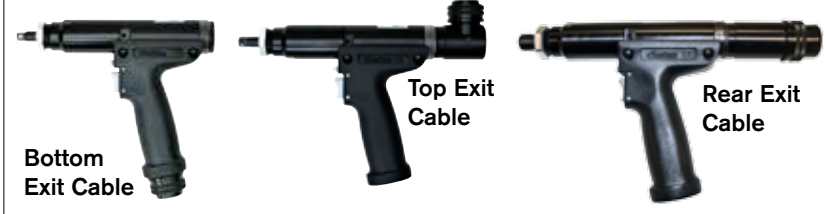

5000 Series



APPLICATION DATA


	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ DR	(A)		(B)		(C)		(D)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM
1000 SERIES*																
AEP4(A)(R)(T)12003B(V)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.2	1.00	3/8*	7.34	178.8	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12006B(V)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8*	7.34	178.8	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12011B(V)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12014B(V)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12018BV	18	13	4.5 - 18	3.3 - 13	840	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12022BV	22	16	5.5 - 22	4.1 - 16	656	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
2000 SERIES*																
AEP4(A)(R)(T)22020BV	20	14	5 - 20	3.7 - 14	1,313	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22025BV	25	18	6.3 - 25	4.6 - 18	1,037	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22030BV	30	22	7.5 - 30	5.5 - 22	840	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22035BV	35	25	8.8 - 35	6.5 - 25	747	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22040BV	40	29	10 - 40	7.4 - 29	656	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7

* "V" indicates extended Ergo-Drive output. **E** Replace "V" with "Q" for 1/4" quick change output only as noted in the table.
 Add "A" to part numbers for bottom exit cable models. Add "R" to part numbers for rear exit cable models. Add "T" to part numbers for top exit cable models


	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ DR	(A)		(B)		(C)		(D)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM
5000 SERIES																
AEP35075AV(T)	75	55	19 - 75	14 - 55	944	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35090AV(T)	90	66	23 - 90	17 - 66	767	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35110AV(T)	110	81	28 - 110	21 - 81	634	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35135AV(T)	135	99	34 - 135	25 - 99	515	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35170AV(T)	170	125	43 - 170	32 - 125	418	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35280A(T)	280	206	70 - 280	52 - 207	236	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35350A(T)	350	258	88 - 350	65 - 258	192	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35420A(T)	420	310	105 - 420	78 - 310	159	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35515A(T)	515	380	128 - 515	95 - 380	129	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35635A(T)	635	468	159 - 635	117 - 469	104	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7

"V" indicates extended Ergo-Drive output. **E**
 Add "T" to part numbers for top exit cable models

1000 Series
2000 Series



5000 Series

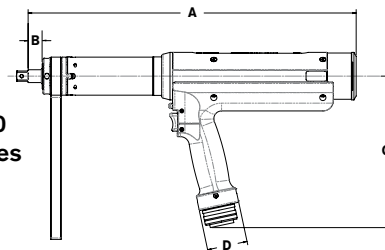

* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE ANGLE NUTRUNNERS

FEATURES AND BENEFITS

AcraDyne angle nutrunners provide the perfect solution to space-limited fastening applications. A compact, durable head houses a precision right-angle gear set which fits into the tightest spaces and delivers a highly accurate fastening cycle. Lightweight materials and a uniform body diameter provide a comfortable grip. The ergonomically placed start lever ensures simple control.



AEN32015C



AEN32025CDL



AEN33060C



AEN33200CF



AEN35140B



AEN35285B


APPLICATION DATA

	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ. DR	(A)		(B)		(C)		(D)		(E)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
2000 SERIES																		
AEN32015C(DL)	15	11	3 - 15	2.2 - 11	1,481	2.7	1.22	3/8	14.61	371	1.85	47	1.37	34.8	.90	22.9	.52	13.1
AEN32025C(DL)	25	18	5 - 20	3.7 - 15	833	2.7	1.22	3/8	14.61	371	1.85	47	1.37	34.8	.90	22.9	.52	13.1
AEN32030C(F)(DL)	30	22	6 - 30	4.4 - 22	803	2.8	1.27	3/8	14.42	366.2	1.85	47	1.65	41.8	1.16	29.4	.70	17.8
AEN32040C(F)(DL)	40	30	8 - 40	5.9 - 29	574	2.8	1.27	3/8	14.42	366.2	1.85	47	1.65	41.8	1.16	29.4	.70	17.8
3000 SERIES																		
AEN33042C(F)	42	31	9.5 - 42	7 - 31	1,095	4.4	2.00	3/8	16.63	422.33	1.85	47	1.66	42.11	1.17	29.67	.7	17.78
AEN33053C(F)	53	39	12 - 53	8 - 39	865	4.4	2.00	3/8	16.63	422.33	1.85	47	1.66	42.11	1.17	29.67	.7	17.78
AEN33060C(F)(DL)	60	44	12 - 60	9 - 44	845	6.6	2.99	1/2	18.92	480.53	1.85	47	1.90	48.36	1.37	34.90	.83	20.96
AEN33090C(F)(DL)	90	66	18 - 90	13 - 66	568	6.6	2.99	1/2	18.92	480.53	1.85	47	1.90	48.36	1.37	34.90	.83	20.96
AEN33120C(F)(DL)	120	89	24 - 120	18 - 88	442	9.3	4.22	1/2	21.00	533.46	1.85	47	2.78	70.59	2.08	52.81	1.05	26.67
AEN33200C(F)(DL)	200	148	40 - 200	29 - 147	245	9.4	4.26	3/4	23.21	589.64	1.85	47	2.59	65.75	1.89	47.98	1.05	26.67
AEN33210C(F)(DL)	210	95	50 - 210	37 - 155	234	10.0	4.54	3/4	23.58	598.88	1.85	47	2.90	73.53	1.97	50.04	1.25	31.75
AEN33300C(F)(DL)	300	221	60 - 300	42 - 221	151	10.0	4.54	3/4	23.58	598.88	1.85	47	2.90	73.53	1.97	50.04	1.25	31.75
AEN33375C(F)(DL)	375	277	75 - 375	55 - 276	151	10.0	4.54	3/4	23.58	598.88	1.85	47	2.90	73.53	1.97	50.04	1.25	31.75
5000 SERIES																		
AEN35090B(F)	90	66	23 - 90	17 - 66	607	6.9	3.13	1/2	22.59	573.7	2.31	58.7	1.90	48.4	1.37	34.9	.81	20.6
AEN35140B(F)	140	103	35 - 140	26 - 103	472	10.4	4.72	3/4	22.52	571.9	2.31	58.7	2.59	65.8	1.89	48	1.05	26.7
AEN35175B(F)	175	129	44 - 175	33 - 129	384	10.5	4.76	3/4	22.52	571.9	2.31	58.7	2.59	65.8	1.89	48	1.05	26.7
AEN35225B(F)	225	166	56 - 225	41 - 166	291	12.3	5.58	3/4	22.88	581.1	2.31	58.7	2.90	73.5	1.97	50	1.25	31.8
AEN35285B(F)	285	210	71 - 285	52 - 210	236	12.3	5.58	3/4	22.88	581.1	2.31	58.7	2.90	73.5	1.97	50	1.25	31.8
AEN35350B(F)	350	258	88 - 350	65 - 258	191	12.3	5.58	3/4	22.88	581.1	2.31	58.7	2.90	73.5	1.97	50	1.25	31.8


* Add "F" to part numbers for flush socket only as noted in the table.

Add "DL" to part numbers for dual levers only as noted in the table.

2000 & 3000 Series

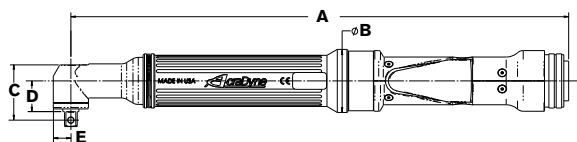

5000 Series

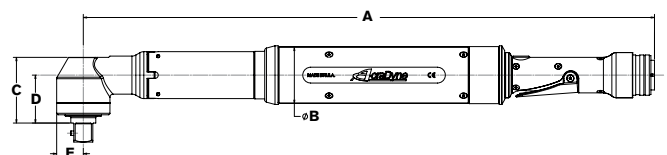

ACRADYNE INLINE NUTRUNNERS

FEATURES AND BENEFITS

Due to their compact size and durability, AcraDyne inline nutrunners are the ideal choice for fixtured fastening applications. A uniform body diameter and a hex shaped mounting point allow for simple installation into fixtured plates. A reaction bar for use in handheld applications is also included with all AcraDyne inline nutrunners.



APPLICATION DATA

	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ. DR IN	(A)		(B)		(C)		(D)		(E)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
2000 SERIES*																		
AES32010C(V)(Q)	10	7.4	2 - 10	1.5 - 7.4	2,222	2.5	1.13	3/8"	13.85	351.7	1.59	40.4	1.85	47	.56	14.3	1.50	38.1
AES32020C(V)(Q)	20	15	4 - 20	3.0 - 15	1,250	2.5	1.13	3/8"	13.85	351.7	1.59	40.4	1.85	47	.56	14.3	1.50	38.1
AES32025C(V)(Q)	25	18	5 - 25	3.7 - 18	893	3.2	1.45	3/8"	13.85	351.7	1.59	40.4	1.85	47	.56	14.3	1.50	38.1
AES32038C(V)	38	28	7.5 - 38	5.5 - 28	595	4.2	1.91	3/8"	16.69	424	1.50	38.1	1.85	47	.51	12.9	1.50	38.1
3000 SERIES*																		
AES33040C(V)(-2)	40	30	8 - 40	5.9 - 30	1,314	6.4	2.90	1/2"	18.24	463.38	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33060C(V)(-2)	60	44	12 - 60	8.9 - 44	883	6.4	2.90	1/2"	18.24	463.38	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33100C(V)(-2)	100	74	20 - 100	15 - 74	489	8.1	3.67	1/2"	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33150CV	150	111	30 - 150	22 - 111	329	8.1	3.67	1/2"	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33150C-2	150	111	30 - 150	22 - 111	329	8.1	3.67	3/4"	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33230CV	185	137	46 - 185	34 - 137	221	8.1	3.67	1/2"	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33230C-2	230	170	46 - 230	34 - 170	221	8.1	3.67	3/4"	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.85	47
AES33400C	400	295	80 - 400	59 - 295	122	13.0**	5.90**	3/4"	24.90	632.46	1.94	49.28	1.85	47	1.11	28.08	2.64	67.1
AES33600C	600	443	120 - 600	89 - 443	82	13.0**	5.90**	3/4"	24.90	632.46	1.94	49.28	1.85	47	1.11	28.08	2.64	67.1
5000 SERIES																		
AES35075AV	75	55	19 - 75	14 - 55	944	9.2	4.17	1/2"	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35090AV	90	66	23 - 90	17 - 66	767	9.2	4.17	1/2"	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35110AV	110	81	28 - 110	21 - 81	634	9.2	4.17	1/2"	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35135AV	135	100	34 - 135	25 - 100	515	9.2	4.17	1/2"	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35170AV	170	126	43 - 170	32 - 126	418	9.2	4.17	1/2"	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.78	45.2
AES35280A	280	207	70 - 280	52 - 207	236	12.8	5.81	3/4"	24.22	615.1	2.64	67.1	2.31	58.7	1.11	28.1	1.78	45.2
AES35350A	350	258	88 - 350	65 - 258	192	12.8	5.81	3/4"	24.22	615.1	2.64	67.1	2.31	58.7	1.11	28.1	1.78	45.2
AES35420A	420	310	105 - 420	78 - 310	159	12.8	5.81	3/4"	24.22	615.1	2.64	67.1	2.31	58.7	1.11	28.1	1.78	45.2
AES35515A	515	380	128 - 515	95 - 380	129	12.8	5.81	3/4"	24.22	615.1	2.64	67.1	2.31	58.7	1.11	28.1	1.78	45.2
AES35635A	635	469	159 - 635	117 - 469	104	12.8	5.81	3/4"	24.22	615.1	2.64	67.1	2.31	58.7	1.11	28.1	1.78	45.2


* 2000 series tools are available in "V" for Ergo-Drive and Q for 1/4" quick-change models only as noted in the table.

3000 series tools are available in "V" for Ergo-Drive and "-2" models for 2" sliding spindle only as noted in the table.


5000 series tools: "V" indicates extended Ergo-Drive output.

** Includes reaction bar and fixture nut

2000 & 3000 Series



5000 Series



* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE FIXTURED NUTRUNNERS



AEF35135AV
Standard Spindle, Rear Exit Cable



AEF35135AVB
Standard Spindle, Bottom Exit Cable



AEF35350A
Standard Spindle, Rear Exit Cable



AEF35135A-2
2" Sliding Spindle, Rear Exit Cable



AEF35135AB-2
2" Sliding Spindle, Bottom Exit Cable


APPLICATION DATA

5000 SERIES*	NM	MAX TORQUE FT-LB	NM	TORQUE RANGE FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET KG	OUTPUT DRIVE
AEF35075A(V)(VB)(-2)(B-2)	75	55	19 - 75	14 - 55	944	9.6	4.35	1/2 SQ. DR.
AEF35090A(V)(VB)(-2)(B-2)	90	66	23 - 90	17 - 66	767	9.6	4.35	1/2 SQ. DR.
AEF35110A(V)(VB)(-2)(B-2)	110	81	28 - 110	21 - 81	634	9.6	4.35	1/2 SQ. DR.
AEF35135A(V)(VB)(-2)(B-2)	135	100	34 - 135	25 - 100	515	9.6	4.35	1/2 SQ. DR.
AEF35170A(V)(VB)	170	125	43 - 170	32 - 125	418	9.6	4.35	1/2 SQ. DR.
AEF35170A(-2)(B-2)	170	125	43 - 170	32 - 125	418	9.6	4.35	3/4 SQ. DR.
AEF35280A(B)**	280	207	70 - 280	52 - 207	236	13.6	6.17	3/4 SQ. DR.
AEF35350A(B)**	350	258	88 - 350	65 - 258	192	13.6	6.17	3/4 SQ. DR.
AEF35420A(B)**	420	310	105 - 420	77 - 310	159	13.6	6.17	3/4 SQ. DR.
AEF35515A(B)**	515	380	128 - 515	95 - 380	129	13.6	6.17	3/4 SQ. DR.
AEF35635A(B)**	635	469	159 - 635	117 - 469	104	13.6	6.17	3/4 SQ. DR.

* "V" = standard spindle with rear exit cable. "VB" = standard spindle with bottom exit cable. "B" = bottom exit cable

"-2" = 2" sliding spindle with rear exit cable. "B-2" = 2" sliding spindle with bottom exit cable.

** Item 28843 is a panel mount 2" sliding spindle for 280 - 635 Nm models.

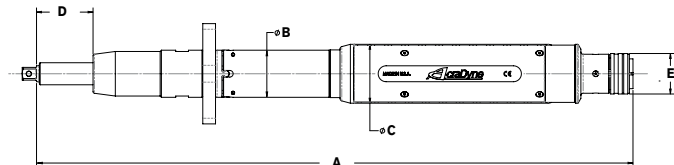

DIMENSIONS

5000 SERIES	IN	(A) MM	IN	(B) MM	IN	(C) MM	IN	(D) MM	IN	(E) MM
AEF35075AV	17.67	448.8	1.85	47	2.31	58.7	.72	18.4	1.59	40.4
AEF35090AV	17.67	448.8	1.85	47	2.31	58.7	.72	18.4	1.59	40.4
AEF35110AV	17.67	448.8	1.85	47	2.31	58.7	.72	18.4	1.59	40.4
AEF35135AV	17.67	448.8	1.85	47	2.31	58.7	.72	18.4	1.59	40.4
AEF35170AV	17.67	448.8	1.85	47	2.31	58.7	.72	18.4	1.59	40.4
AEF35075A-2	23.43	595.1	1.85	47	2.31	58.7	2.22	56.4	1.59	40.4
AEF35090A-2	23.43	595.1	1.85	47	2.31	58.7	2.22	56.4	1.59	40.4
AEF35110A-2	23.43	595.1	1.85	47	2.31	58.7	2.22	56.4	1.59	40.4
AEF35135A-2	23.43	595.1	1.85	47	2.31	58.7	2.22	56.4	1.59	40.4
AEF35170A-2	23.43	595.1	1.85	47	2.31	58.7	2.22	56.4	1.59	40.4
AEF35280A	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7	20.4	518
AEF35350A	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7	20.4	518
AEF35420A	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7	20.4	518
AEF35515A	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7	20.4	518
AEF35635A	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7	20.4	518

* logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE TUBENUT NUTRUNNERS AND SPECIALTY GEARHEADS

FEATURES AND BENEFITS

- Patented safety algorithm
- Transducer senses resistance in the initial 90 degrees of rotation and returns to open upon any resistance encountered
- Durable tubenut head design
- Simple, one-touch back to open operation for maximum productivity



AET 2000 Series Model




AET 1000 Series Model



AET 2000 Series Model with Double Levers

WITH INNOVATIVE SAFETY SENSOR TECHNOLOGY!

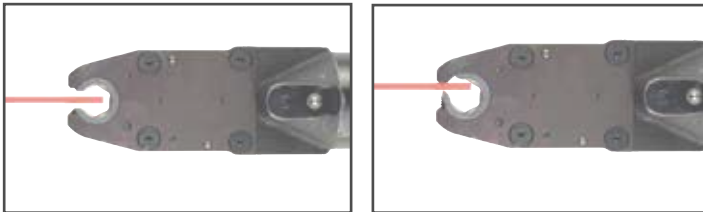

APPLICATION DATA

1000 SERIES*	NM	MAX TORQUE FT-LB	TORQUE RANGE NM	TORQUE RANGE FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET KG	IN	OUTPUT DRIVE NM
AET4AA12018B	14	13	3.6 - 14	2.7 - 11	516	3.1	1.41	1/4 - 7/16	7 - 12
AET4AB12025B	20	18	5 - 20	3.7 - 15	387	3.1	1.41	3/8 - 5/8	10 - 17
AET4A12025B-KD	25	18	5 - 25	3.7 - 18	387	3.1	1.41	3/8 - 5/8	10 - 17

2000 SERIES*	NM	MAX TORQUE FT-LB	TORQUE RANGE NM	TORQUE RANGE FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET KG	IN	OUTPUT DRIVE NM
AET32020C(DL)	20	15	4 - 16	3.0 - 12	622	3.1	1.41	1/4 - 7/16	7 - 12
AET32025C(DL)	25	18	5 - 20	3.7 - 15	466	4.0	1.81	3/8 - 5/8	10 - 17
AET32035C(DL)	35	26	7 - 28	5.2 - 21	347	4.5	2.04	1/2 - 7/8	13 - 24
AET32050C(DL)	50	37	10 - 40	7.4 - 30	257	5.6	2.54	5/8 - 1-3/16	17 - 32

* Add "DL" to part numbers for double levers. Request specific socket size when placing your order. AIMCO offers a wide variety of socket sizes to fit your needs. Contact AIMCO at 1-800-852-1368.

SPECIALTY GEARHEADS

AIMCO can provide specialized heads for most any application. Tubenut, Hold and Drive, Crow Foot, Offsets, and Sliding Spindles are just a few of the head styles available. Whatever the requirements, AIMCO will recommend the head configuration that will get the job done successfully.



ACRADYNE HOLD & DRIVE NUTRUNNERS

FEATURES AND BENEFITS


- Torques ranging from 20 Nm – 200 Nm
- Very robust design
- 1" and 2" travels are standard
- Sockets and holders are custom



APPLICATION DATA

MODEL*	NM	MAX TORQUE	FT-LB	NM	TORQUE RANGE	FT-LB	FREE SPEED RPM	WEIGHT LB		MIN/MAX SOCKET
AEH4F12020B-(1,2)	20		15	4 - 20		3 - 15	533	-1 = 2.8	-2 = 3.0	9/16 (14 MM) / 13/16, (21 MM)
AEH4F12026B-(1,2)	26		19	5 - 26		4 - 19	432	-1 = 2.8	-2 = 3.1	9/16 (14 MM) / 13/16, (21 MM)
AEH32025C-(1,2)	25		18	5 - 25		4 - 18	833	-1 = 3.5	-2 = 3.5	9/16 (14 MM) / 13/16, (21 MM)
AEH32030C-(1,2)	30		22	6 - 30		4 - 22	803	-1 = 3.5	-2 = 3.6	9/16 (14 MM) / 13/16, (21 MM)
AEH32040C-(1,2)	40		30	8 - 40		6 - 30	574	-1 = 3.5	-2 = 3.7	9/16 (14 MM) / 13/16, (21 MM)
AEH33042C-(1,2)	42		31	10 - 42		7 - 31	1,095	-1 = 5.6	-2 = 5.8	9/16 (14 MM) / 13/16, (21 MM)
AEH33053C-(1,2)	53		39	12 - 53		8 - 39	865	-1 = 5.6	-2 = 5.8	9/16 (14 MM) / 13/16, (21 MM)
AEH33060C-(1,2)	60		44	12 - 60		9 - 44	845	-1 = 7.3	-2 = 7.5	9/16 (14 MM) / 1-1/4, (32 MM)
AEH33090C-(1,2)	90		66	18 - 90		13 - 66	568	-1 = 7.3	-2 = 7.6	9/16 (14 MM) / 1-1/4, (32 MM)
AEH33120C-(1,2)	120		89	24 - 120		18 - 89	442	-1 = 10.0	-2 = 10.3	5/8 (15 MM) / 1-1/4, (32 MM)
AEH33200C-(1,2)	200		148	40 - 200		29 - 148	245	-1 = 10.0	-2 = 10.4	5/8 (16 MM) / 1-1/4, (32 MM)
AEH35090B-(1,2)	90		66	23 - 90		17 - 66	607	-1 = 7.6	-2 = 7.9	9/16 (14 MM) / 1-1/4, (32 MM)
AEH35140B-(1,2)	140		103	35 - 140		26 - 103	472	-1 = 10.6	-2 = 11.0	5/8 (15 MM) / 1-1/4, (32 MM)
AEH35175B-(1,2)	175		129	44 - 175		33 - 129	384	-1 = 10.6	-2 = 11.1	5/8 (15 MM) / 1-1/4, (32 MM)
AEH35225B-(1,2)	225		166	56 - 225		41 - 166	291	-1 = 12.9	-2 = 13.3	3/4 (19MM) / 1-1/4, (32 MM)
AEH35285B-(1,2)	285		210	71 - 285		52 - 210	236	-1 = 12.9	-2 = 13.3	3/4 (19MM) / 1-1/4, (32 MM)
AEH35350B-(1,2)	350		258	88 - 350		65 - 258	191	-1 = 12.9	-2 = 13.3	3/4 (19MM) / 1-1/4, (32 MM)

* Add "1" to part numbers for 1" travel. Add "2" to part numbers for 2" travel.

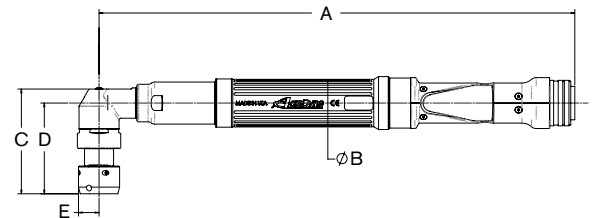


DIMENSIONS

MODEL	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)*	MM	IN	(E)	MM
AEH4F12020B-1	14.59		370.7	1.59		40.4	3.72		94.4	3.17		80.6	.76		19.3
AEH4F12026B-1	14.59		370.7	1.59		40.4	3.72		94.4	3.17		80.6	.76		9.3
AEH32025C-1	14.59		370.7	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH32030C-1	14.59		370.7	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH32040C-1	14.59		370.7	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH33042C-1	16.79		426.5	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH33053C-1	16.79		426.5	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH33060C-1	18.92		480.5	1.96		49.8	4.04		102.5	3.37		85.66	.94		23.9
AEH33090C-1	18.92		480.5	1.96		49.8	4.04		102.5	3.37		85.66	.94		23.9
AEH33120C-1	21.00		533.5	1.96		49.8	4.87		123.7	4.09		103.82	1.13		28.6
AEH33200C-1	23.21		589.5	1.96		49.8	4.87		123.7	4.09		103.82	1.13		28.6
AEH35090B-1	22.63		574.8	2.31		58.7	4.02		102.1	3.36		85.26	1.32		33.4
AEH35140B-1	22.52		571.9	2.31		58.7	4.87		123.7	4.09		103.82	1.13		28.6
AEH35175B-1	22.52		571.9	2.31		58.7	4.87		123.7	4.09		103.82	1.13		28.6
AEH35225B-1	22.92		582.2	2.31		58.7	5.52		140.1	5.52		112.2	1.32		33.4
AEH35285B-1	22.92		582.2	2.31		58.7	5.52		140.1	5.52		112.2	1.32		33.4
AEH35350B-1	22.92		582.2	2.31		58.7	5.52		140.1	5.52		112.2	1.32		33.4

ACRADYNE MID-EXIT CABLE NUTRUNNERS

FEATURES AND BENEFITS

- Length
 - Reduced tool length due to cable exiting in front of grip surface
- Ergonomics
 - Reduced torque reaction compared to pistol-style tools
 - The inline handle, coupled with the ergonomic hand positioning, allows for increased leverage and decreased strain on the wrist
- Cable management
 - If used with a spring balancer, the tool hangs naturally near its center of gravity, the cable is controlled by the balancer
 - Front positioning of cable provides for easy cable management

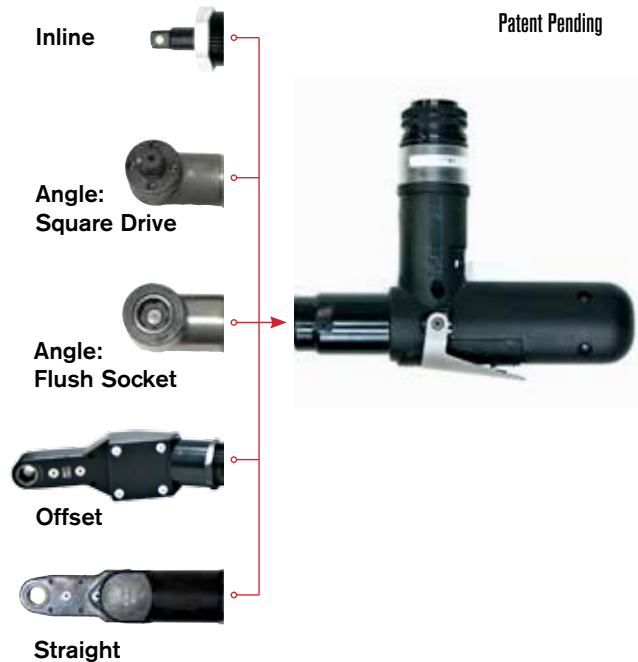


Specialized heads and blades available by request. Contact AIMCO at 1-800-852-1368.

APPLICATION DATA

MODEL*	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM		WEIGHT (-) SOCKET		OUTPUT DRIVE
	NM	FT-LB	NM	FT-LB	RPM	LB	KG		
AEN4C22015BM(F)	15	11	3.75 - 15	2.77 - 11	700	2.6	1.18	3/8 sq. dr.	
AEN4F22030BM(F)	30	22	7.5 - 30	5.53 - 22	675	3.3	1.50	3/8 sq. dr.	
AEN4F22037BM(F)	37	29	9.25 - 37	6.82 - 29	533	3.3	1.50	3/8 sq. dr.	
AEN4F22044BM(F)	44	32	11 - 40	8.11 - 29	432	3.3	1.50	3/8 sq. dr.	
AES4A22020BVM	20	15	5 - 20	3.7 - 15	1050	2.4	1.09	3/8 sq. dr.	
AES4A22025BVM	25	18	6.3 - 25	4.6 - 18	830	2.4	1.09	3/8 sq. dr.	
AES4A22030BVM	30	22	7.5 - 30	5.5 - 22	672	2.4	1.09	3/8 sq. dr.	
AES4A22040BVM	40	30	10 - 40	7.4 - 30	525	2.4	1.09	3/8 sq. dr.	

* Add "F" to part numbers for flush socket.

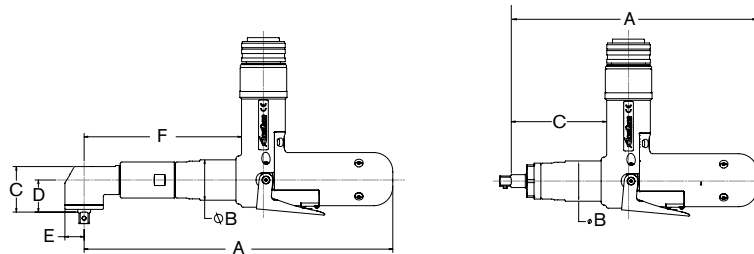

DIMENSIONS

MODEL	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM	IN	(F)	MM
AEN4C22015BM	9.02		229.1	1.47		37.3	1.29		32.8	.82		20.9	.52		13.1	5.53		140.4
AEN4F22030BM	11.24		285.6	1.47		37.3	1.66		42.1	1.17		29.7	.70		17.8	5.73		145.6
AEN4F22037BM	11.24		285.6	1.47		37.3	1.66		42.1	1.17		29.7	.70		17.8	5.73		145.6
AEN4F22044BM	11.24		285.6	1.47		37.3	1.66		42.1	1.17		29.7	.70		17.8	5.73		145.6
AES4A22020BVM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-
AES4A22025BVM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-
AES4A22030BVM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-
AES4A22040BVM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-

ACRADYNE RIV-NUT NUTRUNNERS

FEATURES AND BENEFITS

- Top and rear exit cable are standard
- Straight, Fixtured, and Push-to-Start models are available by request. Contact AIMCO at 1-800-852-1368.



Top Exit Cable



Rear Exit Cable




Bottom Exit Cable

APPLICATION DATA

MODEL*	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ DR	(A)		(B)		(C)		(D)*	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM
AEP4(A)(R)(T)12006BR	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8	9.68	245.9	1.05	26.7	6.01	152.6	1.96	49.8
AEP4(A)(R)(T)12011BR	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12014BR	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12018BR	18	13	4.5 - 18	3.3 - 13	840	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12022BR	22	16	5.5 - 22	4.1 - 16	656	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22020BR	20	15	5 - 20	3.7 - 15	1,313	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22025BR	25	18	6.3 - 25	4.6 - 18	1,037	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22030BR	30	22	7.5 - 30	5.5 - 22	840	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22040BR	40	30	10 - 40	7.4 - 30	656	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8

* Add "A" to part numbers for bottom exit cable models, Add "R" to part numbers for rear exit cable models, Add "T" to part numbers for top exit cable models.

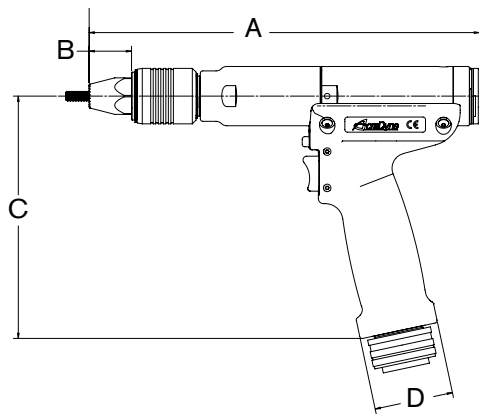

ACRADYNE HIGH TORQUE DC TOOLS

Critical bolting demands tools that deliver high torque with superior performance. Couple with AcraDyne's Controller, the HT Series tools combine these features in an electric, high-torque bolting system that beats the competition in accuracy, speed, and safety.

FEATURES AND BENEFITS

- One of the most accurate high-torque tools in the world today
- Up to 100 times faster than hydraulic tools
- 250 Nm – 12,000 Nm
- Ergonomic, robust design with five handle configurations
- Over 300 models to choose from
- Built-in integral transducer for optimal monitoring and control
- The world's ONLY traceable system at the square drive
- Data retrieval
- Designed and **MADE IN THE USA**



Straight Lever Type (AES)



Pistol Type (AEP)



Rear Mounted Pistol (AED)



Axial Type (AEJ)



Fixtured Type (AEF)

FIXED GEARCASE MODEL*	SERIES	APPROX. TORQUE		APPROX. SPEED rpm	WEIGHT		LENGTH		DIA.		DRIVE in	SOUND LEVEL dB(A)
		Nm	ft-lb		kg	lb	mm	in	mm	in		
(AEP) (AED) (AES) (AEJ) (AEF)4A86250B	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A86425B	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A86625B	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A86925B	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A771200B	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A773000B	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A884200B1	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A884200B	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A885000B	8000	5,000	3,700	9	11.1	24.5	340	13.4	86	3.6	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A896500B**	8000/9000	6,500	4,800	7	15.7	34.5	378	14.9	101	4.0	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A898100B**	8000/9000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
(AEP) (AEJ)4A8X12000B**	8000/9000	12,000	8,850	3.5	23.0	51.0	526	21	131	5.2	1.5	66

* Add "B" to the end of the model number for bottom exit cable (AEF fixtured models only).

** Requires 220V power supply

CLUTCHED MODEL	SERIES	APPROX. TORQUE		APPROX. SPEED rpm	WEIGHT		LENGTH		DIA.		DRIVE in	SOUND LEVEL dB(A)
		Nm	ft-lb		kg	lb	mm	in	mm	in		
(AEP) (AEJ)4B86250B	6000	250	185	315	5.3	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B86425B	6000	425	315	165	5.3	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B86625B	6000	625	460	106	5.5	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B86925B	6000	925	682	72	5.5	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B771200B	7000	1200	885	65	7.3	16	310	12.2	76	3.0	1	66
(AEP) (AEJ)4B773000B	7000	3,000	2,213	25	8.2	18	345	13.6	76	3.0	1	66
(AEP) (AEJ)4B884200B1	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1	66
(AEP) (AEJ)4B884200B	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1.5	66
(AEP) (AEJ)4B885000B	8000	5,000	3,700	9	11.8	26	391	15.4	86	3.6	1.5	66
(AEP) (AEJ)4B896500B**	8000/9000	6,500	4,800	7	16.4	36	429	16.9	101	4.0	1.5	66
(AEP) (AEJ)4B898100B**	8000/9000	8,100	6,000	5	16.4	36	429	16.9	101	4.0	1.5	66
(AEP) (AEJ)4B8X12000B**	8000/9000	12,000	8,850	3.5	24.0	52.5	564	22	131	5.2	1.5	66

** Requires 220V power supply

ACRADYNE HIGH TORQUE DC ANGLE TOOLS


FEATURES AND BENEFITS

- Transducerized closed loop control at the output like all AcraDyne HT-Series tools
- These low-profile head, small-diameter, lever-operated tools, with the torque measured at the output, offer a unique solution
- The torque reported is the torque delivered
- One of the most accurate high-torque right-angle tools in the world
- Smallest tools of their kind on the market
- Same durable, high-cycle gearing as our other HT-series tools
- Models up to 12,000 Nm available upon request



SPECIFICATIONS

MODEL	MAX. TORQUE*		TORQUE RANGE		FREE SPEED RPM	WEIGHT		OUTPUT DRIVE
	nm	ft.-lbs.	nm	ft.-lbs.		lbs.	kg	
AEN356540A	540	398	135-540	100-398	109	13.1	5.95	3/4" Square Drive
AEN3571000A	1000	737	250-1000	184-737	61	16.3	7.39	1" Square Drive
AEN3571600A	1600	1180	400-1600	295-1180	33	16.7	7.57	1" Square Drive
AEN3572600A	2600	1917	650-2600	479-1917	21	18.5	8.40	1" Square Drive

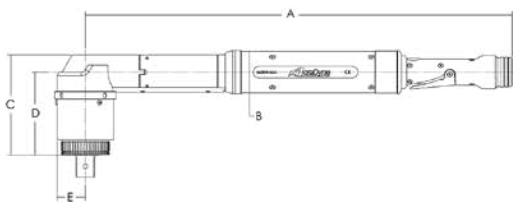

DIMENSIONS	A		B		C		D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm
AEN356540A	22.58	573.6	2.31	58.7	4.75	120.6	4.05	102.8	1.33	33.7
AEN3571000A	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3571600A	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3572600A	22.92	582.2	2.31	58.7	6.77	171.9	5.86	148.8	1.53	38.7

ACRADYNE HIGH TORQUE DUAL LEVER AND GEARHEAD TOOLS

DUAL LEVER TOOLS

FEATURES AND BENEFITS

- Additional safety when using a tool with a reaction bar or nose extension
- Requires both hands to start the tool, keeping hands clear of application
- Helps avoid accidental starting of the tool
- Available in three handle types: "Handle Bar" (F) style, Straight (S) style with side handle, and Pistol (P) style



MODEL* (HANDLE TYPE)	SERIES	APPROX. TORQUE		APPROX. SPEED	WEIGHT		LENGTH		DIA.		DRIVE in	SOUND LEVEL dB(A)
		Nm	ft-lb	rpm	kg	lb	mm	in	mm	in		
AE(S)(F)(P)4(A)(B)66250	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)66425BDL	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)66625BDL	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)66925BDL	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4(A)(B)771200BDL	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
AE(S)(F)(P)4(A)(B)773000BDL	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
AE(S)(F)(P)4(A)(B)884200B1DL	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
AE(S)(F)(P)4(A)(B)884200BDL	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(S)(F)(P)4(A)(B)885000BDL	8000	5,000	3,700	9	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(S)(F)(P)4(A)(B)896500BDL**	8000/9000	6,500	4,800	7	15.7	34.5	378	14.9	101	4.0	1.5	66
AE(S)(F)(P)4(A)(B)898100BDL**	8000/9000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
AEF4(A)(B)891200BDL**	8000/9000	12,000	8,850	3.5	23.0	51.0	526	21	131	5.2	1.5	66

* The fifth digit of the model number is "A" for fixed gearcase models and "B" for clutched gearcase models.

- Above data is for clutched gearcase models. For non-clutched models, reduce weight by 1.5 lb (0.7 kg) and length by 2 in (51 mm).

- For Straight Type tools Choose the position of the handle by adding (L) for left side and (R) for right side

**Requires 220V power supply

HT GEARHEAD TOOLS

FEATURES AND BENEFITS

- Custom made to fit virtually any application
- Same durable gearing as found on AcraDyne's standard HT series tools
- Model types available:
 - HT Offset Gearhead tools
 - HT Right Angle with Offset Gearhead tools
 - HT Right Angle Air tools with Offset Gearhead



ACRADYNE HIGH TORQUE ACCESSORIES



NOSE EXTENSIONS


FEATURES AND BENEFITS

- Ideal for hard-to-reach applications when a torque tube, or arm, is not desirable
- A cost-effective, more flexible option compared to a multiple spindle system
- Common applications:
 - Wheel install and repair stations
 - Large flange assembly



REACTION BARS

Tool includes a standard, spline attachment reaction device. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-800-852-1368.

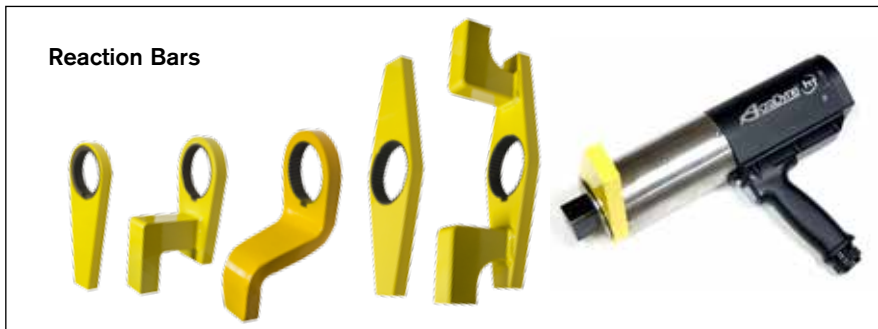

MODEL	DESCRIPTION
26810	Single Ended, Flat, 6000 Series
26815	Single Ended, 2.375" Offset, 6000 Series
26830	Double Ended, Flat, 6000 Series
26885	Single Ended, 4.00" Offset, 6000 Series
26800	Single Ended, Flat, 7000 Series
27200	Single Ended, 3.10" Offset, 7000 Series
26820	Double Ended, Flat, 7000 Series
26890	Single Ended, 4.00" Offset, 7000 Series
25277	Single Ended, Flat, 8000 Series
25274	Single Ended, 3.35" Offset, 8000 Series
25275	Single Ended, 4.00" Offset, 8000 Series
25278	Double Ended, Flat, 8000 Series
25276	Double Ended, 3.35" Offset, 8000 Series
27255	Single Ended, Flat, 9000 Series
26840	Single Ended, 3.35" Offset, 9000 Series

ACCESSORIES

Custom accessories are available for your application; contact an AIMCO Customer Service Associate for details, 1-800-852-1368.



MODEL	DESCRIPTION
26477	Swivel Bail, 6000 Series
26327	Swivel Bail, 7000 Series
26630	Swivel Bail, 8000 Series
26478	Swivel D-Handle, 6000 Series
26328	Swivel D-Handle, 7000 Series
25291	Swivel D-Handle, 8000 Series
26479	Stationary Bail, 6000 series (26336 handle not included)
26332	Stationary Bail, 7000 series (26336 handle not included)
25289	Stationary Bail, 8000 series (26336 handle not included)
26336	Fixed Handle (for use with 26479, 26332, 25289)
26337	Rear Fixed Hoist Ring, 6000/7000/8000 Series Pistols
28514	Rear Folding Hoist Ring Kit for 8000 Series Pistols
28549	Sliding Spindle, 6000 Series
27045	Sliding Spindle, 7000 Series
30300	Sliding Spindle, 8000 Series

PROTECTIVE COVERS



Durable protective covers prevent marring and damage.

MODEL	DESCRIPTION
BJ10078	Protective Cover, 6000 Series
BJ10077	Protective Cover, 7000 Series
BJ10076	Protective Cover, 8000 Series

DC TOOLS: TOOL/SPINDLE SELECTION GUIDE

MODEL	RPM**	LENGTH		WEIGHT		TORQUE, Nm																						
		in	mm	lb	kg	5	10	15	20	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	
ANGLE																												
AEN4C12004B	3,111	11.65	295.9	2.0	0.91	█																						
AEN4C12009B	1,750	11.00	279.5	2.2	1.00	█	█																					
AEN4C12014B	875	11.66	296.4	2.2	1.00	█	█	█																				
AEN4C12018B	691	11.66	296.4	2.2	1.00	█	█	█	█																			
AEN4C12022B	560	11.66	296.4	2.2	1.00	█	█	█	█	█																		
AEN32015C	1,481	14.6	371.0	2.7	1.22		█	█																				
AEN32025C	833	14.6	371.0	2.7	1.22		█	█	█	█																		
AEN32030C	803	14.4	366.2	2.8	1.27		█	█	█	█	█																	
AEN32040C	574	14.4	366.2	2.8	1.27		█	█	█	█	█	█																
AEN33042C	1,095	16.6	422.3	4.4	2.00		█	█	█	█	█	█																
AEN33053C	1,095	16.6	422.3	4.4	2.00		█	█	█	█	█	█	█															
AEN33060C	845	18.9	480.5	6.6	2.99		█	█	█	█	█	█	█															
AEN33090C	568	18.9	480.5	6.6	2.99		█	█	█	█	█	█	█	█														
AEN33120C	442	21.0	533.5	9.3	4.22		█	█	█	█	█	█	█	█														
AEN33200C	245	23.2	589.6	9.4	4.26		█	█	█	█	█	█	█	█	█													
AEN33210C	234	23.6	599.9	10.0	4.54		█	█	█	█	█	█	█	█	█	█												
AEN33300C	151	23.6	599.0	10.0	4.54		█	█	█	█	█	█	█	█	█	█	█											
AEN33375C	151	23.6	599.0	10.0	4.54		█	█	█	█	█	█	█	█	█	█	█	█										
AEN35090B	607	22.6	573.7	6.9	3.13		█	█	█	█	█	█	█	█														
AEN35140B	472	22.5	571.9	10.4	4.72		█	█	█	█	█	█	█	█	█													
AEN35175B	384	22.5	571.9	10.5	4.76		█	█	█	█	█	█	█	█	█	█												
AEN35225B	291	22.9	581.1	12.3	5.58		█	█	█	█	█	█	█	█	█	█	█											
AEN35285B	236	22.9	581.1	12.3	5.58		█	█	█	█	█	█	█	█	█	█	█	█										
AEN35350B	191	22.9	581.1	12.3	5.58		█	█	█	█	█	█	█	█	█	█	█	█	█									
INLINE																												
AES4A12003BQ	2,625	11.12	282.7	2.0	0.91	█																						
AES4A12006BQ	2,625	11.12	282.7	2.0	0.91	█	█																					
AES4A12011BV	1,313	11.44	290.5	2.2	1.00	█	█	█																				
AES4A12014BV	1,037	11.44	290.5	2.2	1.00	█	█	█	█																			
AES4A12018BV	840	11.44	290.5	2.2	1.00	█	█	█	█	█																		
AES4A12022BV	656	11.44	290.5	2.2	1.00	█	█	█	█	█	█																	
AES32010CV	2,222	13.9	351.7	2.5	1.13	█	█																					
AES32020CV	1,250	13.9	351.7	2.5	1.13	█	█	█																				
AES32025CV	893	13.9	351.7	3.2	1.45	█	█	█	█																			
AES32038CV	595	16.7	424.0	4.2	1.91	█	█	█	█	█																		
AES33040CV	1,314	18.2	463.4	6.4	2.90	█	█	█	█	█																		
AES33060CV	883	18.2	463.4	6.4	2.90	█	█	█	█	█	█																	
AES33100CV	489	22.6	573.0	8.1	3.67	█	█	█	█	█	█																	
AES33150CV	329	22.6	573.0	8.1	3.67	█	█	█	█	█	█	█																
AES33230CV	221	22.6	573.0	8.1	3.67	█	█	█	█	█	█	█	█															
AES33230C-2	221	22.6	573.0	8.1	3.67	█	█	█	█	█	█	█	█	█														
AES33400CV	122	24.9	632.5	13.0*	5.90*	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES33600CV**	82	24.9	632.5	13.0*	5.90*	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES35075AV	944	21.9	555.2	9.2	4.17		█	█	█	█	█	█	█	█														
AES35090AV	767	21.9	555.2	9.2	4.17		█	█	█	█	█	█	█	█	█													
AES35110AV	634	21.9	555.2	9.2	4.17		█	█	█	█	█	█	█	█	█													
AES35135AV	515	21.9	555.2	9.2	4.17		█	█	█	█	█	█	█	█	█	█												
AES35170AV	418	21.9	555.2	9.2	4.17		█	█	█	█	█	█	█	█	█	█												
AES35280A	236	24.2	615.1	12.8	5.81		█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES35350A	192	24.2	615.1	12.8	5.81		█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES35420A	159	24.2	615.1	12.8	5.81		█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES35515A***	129	24.2	615.1	12.8	5.81		█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES35635A****	104	24.2	615.1	12.8	5.81		█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█	█

* Includes reaction bar and fixture nut.

** Torque Range: 120-480 Nm Max Torque: 600 Nm

*** Torque Range: 128-515 Nm

**** Torque Range: 159-635 Nm

Recommended Torque Range

Max Torque

DC TOOLS: TOOL/SPINDLE SELECTION GUIDE

MODEL	RPM**	LENGTH		WEIGHT		TORQUE, Nm																							
		in	mm	lb	kg	5	10	15	20	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450		
PISTOL																													
AEP4_12003B	2,625	7.3	186.3	2.2	1.00	█																							
AEP4_12006B	2,625	7.3	186.3	2.2	1.00	█	█																						
AEP4_12011BV	1,313	8.0	203.3	2.3	1.04	█	█	█																					
AEP4_12014BV	1,037	8.0	203.3	2.3	1.04	█	█	█	█																				
AEP4_12018BV	840	8.0	203.3	2.3	1.04	█	█	█	█	█																			
AEP4_12022BV	656	8.0	203.3	2.3	1.04	█	█	█	█	█	█																		
AEP4_22020BV	1,313	8.7	219.9	2.4	1.09	█	█	█	█	█	█																		
AEP4_22025BV	1,037	8.7	219.9	2.4	1.09	█	█	█	█	█	█	█																	
AEP4_22030BV	840	8.7	219.9	2.4	1.09	█	█	█	█	█	█	█	█																
AEP4_22035BV	747	8.7	219.9	2.4	1.09	█	█	█	█	█	█	█	█	█															
AEP4_22040BV	656	8.7	219.9	2.4	1.09	█	█	█	█	█	█	█	█	█															
AEP35075AV	944	16.0	405.2	9.2	4.17																								
AEP35090AV	767	16.0	405.2	9.2	4.17																								
AEP35110AV	634	16.0	405.2	9.2	4.17																								
AEP35135AV	515	16.0	405.2	9.2	4.17																								
AEP35170AV	418	16.0	405.2	9.2	4.17																								
AEP35280A	236	18.4	468.2	13.6	6.17																								
AEP35350A	192	18.4	468.2	13.6	6.17																								
AEP35420A	159	18.4	468.2	13.6	6.17																								
AEP35515A*	129	18.4	468.2	13.6	6.17																								
AEP35635A**	104	18.4	468.2	13.6	6.17																								
TUBENUT																													
AET4A12018B	516	15.41	288.1	3.1	1.41	█	█																						
AET4A12025B	387	15.41	288.1	3.1	1.41	█	█	█																					
AET4A12025B-KD	387	15.9	404.9	3.1	1.41	█	█	█																					
AET32020C	622	17.2	436.4	3.1	1.41	█	█	█	█																				
AET32025C	466	17.8	450.9	4.0	1.81	█	█	█	█	█																			
AET32035C	347	18.1	460.5	4.5	2.04	█	█	█	█	█	█																		
AET32050C	257	18.8	478.0	5.6	2.54	█	█	█	█	█	█	█																	

* Torque Range: 128 - 515 Nm
 ** Torque Range: 159 - 635 Nm



HIGH TORQUE SERIES

MODEL	RPM**	LENGTH		WEIGHT		TORQUE, Nm																						
		in	mm	lb	kg	50	100	200	300	400	500	600	850	1100	1200	1300	1500	2000	2500	3000	4000	5000	6500	8100	12000			
()4(A)(B)66200B	315	12	305	12	5.3	█	█																					
()4(A)(B)66425B	165	12	305	12	5.3	█	█	█																				
()4(A)(B)66625B	106	12	305	12	5.5	█	█	█	█																			
()4(A)(B)66925B	72	12	305	12	5.5	█	█	█	█	█																		
()4(A)(B)771200B	65	12.2	310	16	7.3	█	█	█	█	█	█																	
()4(A)(B)773000B	25	13.6	345	18	8.2	█	█	█	█	█	█	█																
()4(A)(B)884200B1	12	15.4	391	26	11.8																							
()4(A)(B)884200B	12	15.4	391	26	11.8																							
()4(A)(B)885000B	9	15.4	391	26	11.8																							
()4(A)(B)896500B	7	16.9	429	36	16.4																							
()4(A)(B)898100B	5	16.9	429	36	16.4																							
()4(A)(B)8X12000B	3.5	22	564	52.5	24.0																							

Recommended Torque Range

Max Torque

ACRADYNE ACCESSORIES

CABLE ASSEMBLIES

The AcraDyne DC electric nutrunner tool system uses a single cable to carry all necessary conductors for superior ergonomics and durability.

- Flexible polyurethane cover for maximum durability, abrasion and transmission fluid resistant
- Quick disconnects at both ends facilitate tool changeover and troubleshooting
- The CAN data/signal is via RJ45 for products such as the KDM, socket tray or computer





MODEL	DESCRIPTION	LENGTH	
		m	ft
TOOL CABLES			
24330	Cable G3 Tool Cable 3M	3	9.8
25350	Cable G3 Tool Cable 5M	5	16.4
24320	Cable G3 Tool Cable 10M	10	32.8
27110	Cable G3 Tool Cable 3M Lightweight*	3	9.8
27115	Cable G3 Tool Cable 5M Lightweight*	5	16.4
27122	Cable G3 Tool Cable 10M Lightweight*	10	32.8
EXTENSIONS			
24320	Extension cable 10M	10	32.8
25518	Extension cable 20M	20	65.6

*Lightweight cables are for use only with 1000 & 2000 Series tools.

CABLE ADAPTERS AND CONNECTORS

MODEL	DESCRIPTION
ADAPTERS AND CONNECTORS	
	25646 G1 iEC to G3 Cable Adapter
	26934 G3 iEC to G1 Cable Adapter
	27210 G3 Tool to G1 Cable Adapter
	26364 Right Angle Cable Adapter
	26594 Conversion Kit G1 iEC to G3 iEC
	27370 Conversion Kit G3 iEC to G1 iEC
	25491 Breakaway Cable Connector – Ensures disconnect of cable should stress in excess of 40 lbs occur



DATA INTERFACE OPTION

MODEL	DESCRIPTION
DATA INTERFACE OPTIONS	
	27348 I/O Wiring Connector – Simple module to facilitate connections to I/O on iEC Controllers
	28292 System Port Cable, USB 2.0 Cable, A Male to B Male, 3M

CABLE TESTER UNIT

AcraDyne's Cable Tester Unit helps diagnose and verify functionality of AcraDyne Tool Cables.

- Eliminate guesswork as to whether cable is damaged or is functioning within specifications
- Verifies each specific conductor within the cable for continuity

MODEL	DESCRIPTION
	26700 Cable Tester Unit, G3
	26709 Adapter, G3 Tool to G1 Cable (Cable Tester only)

ACRADYNE ACCESSORIES

SOCKET TRAY

Socket trays, for use with iEC and UEC Controllers, are supplied with blank socket pucks machined to fit specific sockets for the application. AIMCO provides this machining as an additional service. When ordering, please specify the outer dimensions of the sockets you plan to use, and whether you would like a quote for the machining service.

- Simply remove the assigned socket to select the application to be run
- Quick and easy set up. Parameters assigned to socket position automatically
- Optional self-illuminating socket receptacles
- Delrin® blanks may be easily machined by the customer to accommodate custom socket profiling
- Nothing to break, wear out, or maintain
- Proximity sensors detect presence of socket



AMPST-2-I



AMPST-6-I



AMPST-6S-I

MODEL	DESCRIPTION
AMPST-2-I	2-Position Socket Tray for iEC Controllers, 2 x 1, 1.25" Socket
AMPST-2-U	2-Position Socket Tray for UEC Controllers, 2 x 1, 1.25" Socket
AMPST-4-I	4-Position Socket Tray for iEC Controllers, 2 x 2, 1.25" Socket
AMPST-4-U	4-Position Socket Tray for UEC Controllers, 2 x 2, 1.25" Socket
AMPST-6S-I	6-Position Socket Tray for iEC Controllers, 6 x 1, 1.25" Socket
AMPST-6S-U	6-Position Socket Tray for UEC Controllers, 6 x 1, 1.25" Socket
AMPST-6-I	6-Position Socket Tray for iEC Controllers, 3 x 2, 1.25" Socket
AMPST-6-U	6-Position Socket Tray for UEC Controllers, 3 x 2, 1.25" Socket
AMPST-8-I	8-Position Socket Tray for iEC Controllers, 4 x 2, 1.25" Socket
AMPST-8-IL	8-Position Socket Tray for iEC Controllers, 4 x 2, 2.0" Socket
AMPST-8-U	8-Position Socket Tray for UEC Controllers, 4 x 2, 1.25" Socket

Socket trays with 6 - 8 positions are available in varied configurations to suit workspace requirements (straight or double rows). Please let your AIMCO representative know of your specific requirements when inquiring.

TOOL BAILS

- AcraDyne's spring bails are designed for use with any of the AcraDyne 1000, 2000, or 3000 Series tools
- Spring bails snap on quickly and firmly at any place on the body of the tool for perfect balance and secure suspension

	MODEL	DESCRIPTION
	25501	Wire Bail for 1000 Series Tools
	27594	Stationary Bail for 1000 Series Tools
	27791	Rotating Bail Assembly for 1000 Series Tools
	26568	Cable Bail to Hang Tool Vertically for Gen III Cables
	21208	Spring Bail for 2000 Series Tools
	23662	Rotating Bail for 2000 Series Tools
	28475	Rotating Bail for AEN33042C and AEN33053C
	23575	Rotating Bail for 3000 Series Tools

SLIDING SPINDLES



20712

20848

MODEL	DESCRIPTION
20712	Sliding Spindle 2" Stroke 2000 Series Tools, 3/8" Drive
20848	Sliding Spindle 2" Stroke 3000 Series Tools, 1/2" Drive
28843	Spindle Assembly, 2" Stroke, 5000 Series, 3/4" Drive

VERTICAL TOOL HANGER

Designed for AcraDyne Gen 1 tools, tool hangers are a great way to keep a tool in place when not being used.



21159

ACRADYNE ACCESSORIES

CONTROLLER BRACKETS



20322



20853



27816

MODEL	DESCRIPTION
20322	Basic wall-mounting plate
20853	Table stand free standing platform
27816	Mounting bracket with internal wireways

MOUNTING BRACKETS

MODEL	DESCRIPTION
25717	Mounting Bracket for 1000 Series Angle Tools
25843	Mounting Bracket for 1000 Series Push-To-Start Tools
26443	Mounting Bracket for Straight and Pistol 1000/2000 Series
24924	Mounting Flange for Straight and Pistol 1000/2000 Series

MODEL	DESCRIPTION
25718	Mounting Bracket for 3000/5000 Series Angle Tools
26570	Mounting Bracket for 3000/5000 Series Straight Tools
25265	Angle head Mounting Bracket (Cradle type) for 3000/5000 Angle Tools over 225 Nm
30351	Mounting Bracket, Drive End for 2000 Series Inline Tools



23730

LIGHT TOWER

Cost- and energy-efficient LED light tower is visible from any direction, angle, and distance

- Two built-in alarms (FB Type) with selectable sound patterns
- Adjustable Volume (Max. 85 dB at 1 m)
- Tower includes red, yellow, green, blue, and clear lenses



28489 Light Tower Bracket for Gen IV Controller

ANGLE TOOL BODY JACKETS

Keep tools protected with AIMCO's tool Body Jackets.



MODEL	DESCRIPTION
BJ10051	For 1000 series angle tools
BJ10052	For 2015, 2025 series angle tools
BJ10053	For 2030, 2040, 2055 series angle tools
BJ10054	For 3060, 3090 series angle tools
BJ10055	For 3120, 3200 series angle tools

BAR CODE SCANNER



28859 Bluetooth®-Enabled Scanner Kit

Sturdy bar code scanners allow you to easily scan small, stacked, or poorly printed, one-dimensional bar codes. Kit includes a cradle, power supply, and USB/Ethernet cable.

- Scratch proof, tempered glass exit window
- Single-circuit board construction eliminates common interconnection failures
- Industrial long-life charging contacts can withstand 250,000+ insertions into cradle
- Wireless scanner enables users to hold scanner at any angle

MODEL	DESCRIPTION
20400	RS232 Barcode Reader Kit
28859	RS232 Wireless Barcode Reader Kit

ACRADYNE CORDLESS TOOLS

UNMATCHED ACCURACY

FEATURES AND BENEFITS

- Pistol Tool Torque Range: 1.5–14 Nm
Angle Tool Torque Range: 1.5–120 Nm
Straight Tool Torque Range: 1.5–14 Nm
- Transducerized for precise delivery of torque and angle to the fastener
- Self-contained with on-board control
- Load tool programming software through USB cable interface
- Vibration alarm handle provides tactile feedback
- Programmable
 - Torque
 - Angle
 - RPM
 - Time
 - Fastening direction
- 100 PSET
- Six step, multi-stage job functionality
- Multicolor LED status screen
- 150,000 results stored on-board



ABP-CTA11Q



ABS-CTA11WQ



ABN-CTA90

MODEL	TORQUE RANGE		MAX SPEED RPM	DRIVE TYPE	WEIGHT W/O BATTERY	
	NM	FT-LB			KG	LBS
PISTOL						
ABP-CTA11Q(WQ)(BQ)(WBQ)	1.5 - 11.0	1.1 - 8.1	570	1/4" QC	1.15	2.5
ABP-CTA14Q(WQ)(BQ)(WBQ)	3.0 - 14.0	2.2 - 10.3	460	1/4" QC	1.15	2.5
ANGLE						
ABN-CTA10(W)(B)(WB)	1.5 - 10.0	1.1 - 7.4	570	3/8" Sq.	1.35	3.0
ABN-CTA12(W)(B)(WB)	2.5 - 12.0	1.8 - 8.9	380	3/8" Sq.	1.4	3.1
ABN-CTA20(W)(B)(WB)	5.0 - 20.0	3.7 - 14.8	300	3/8" Sq.	1.2	2.6
ABN-CTA30(W)(B)(WB)	8.0 - 30.0	5.9 - 22.1	170	3/8" Sq.	1.2	2.6
ABN-CTA55(W)(B)(WB)	15.0 - 55.0	11.1 - 40.6	90	3/8" Sq.	1.4	3.1
ABN-CTA90(W)(B)(WB)	25.0 - 90.0	18.4 - 66.4	60	1/2" Sq.	2.9	6.4
ABN-CTA120(W)(B)(WB)	35.0 - 120	25.8 - 88.5	50	1/2" Sq.	3.1	6.8
STRAIGHT						
ABS-CTA11Q(WQ)(BQ)(WBQ)	1.5 - 11.0	1.1 - 8.1	570	1/4" QC	0.95	2.1
ABS-CTA14Q(WQ)(BQ)(WBQ)	3.0 - 14.0	2.2 - 10.3	460	1/4" QC	0.95	2.1

W = WiFi option B = Barcode option Q = Quick Change

ACRADYNE CORDLESS TOOLS

BATTERIES

- Up to 40% lighter than Ni-MH batteries
- Deep-discharge protection prevents battery failure



AB-B1825LI



AB-B1850LI

BATTERY MODEL #	VOLTAGE	TYPE	CAPACITY	WEIGHT
AB-B1825LI	18V	Li-Ion	2.5 Ah	.8 Lb/.35 kg
AB-B1850LI	18V	Li-Ion	5.0 Ah	1.3 Lb/.6 kg



AB-C18110




BATTERY CHARGERS

- Battery defect detection
- Microprocessor-controlled charging: Charging time is dependent on the capacity of the battery
- Reverse polarity protection
- Automatic battery voltage detection

MODEL	DESCRIPTION	OUTPUT	INPUT	CHARGING TIME	DIMENSIONS (W/O BATTERY)	WEIGHT
AB-C18110	Quick-charge unit for 110V	14.4V - 18V, 3.0A	110VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	3.39" wide x 4.21" tall x 6.02" deep 86 mm wide x 107 mm tall x 153 mm deep	1.2 Lb/.55 kg
AB-C18220	Quick-charge unit for 220V	14.4V - 18V, 3.0A	220-240VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	3.39" wide x 4.21" tall x 6.02" deep 86 mm wide x 107 mm tall x 153 mm deep	1.2 Lb/.55 kg

TOOL DIMENSIONS

MODEL	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
PISTOL										
ABP-CTA11Q(WQ)(BQ)(WBQ)	9.1	230	1	26	8.6	218	4.5	115	-	-
ABP-CTA14Q(WQ)(BQ)(WBQ)	9.1	230	1	26	8.6	218	4.5	115	-	-
ANGLE										
ABN-CTA10(W)(B)(WB)	17.8	451	3.7	95	1.3	33	4.5	115	0.8	21
ABN-CTA12(W)(B)(WB)	17.8	451	3.7	95	1.3	33	4.5	115	0.8	21
ABN-CTA20(W)(B)(WB)	17.8	451	3.7	95	1.3	33	4.5	115	0.8	21
ABN-CTA30(W)(B)(WB)	20.6	523	6.8	173	1.7	42	4.5	115	1.1	29
ABN-CTA55(W)(B)(WB)	22	559	8.2	209	1.7	42	4.5	115	1.1	29
ABN-CTA90(W)(B)(WB)	25.7	653	11.9	303	1.9	49	4.5	115	1.4	35
ABN-CTA120(W)(B)(WB)	28.1	715	14.4	365	2.8	71	4.5	115	2.1	54
STRAIGHT										
ABS-CTA11Q(WQ)(BQ)(WBQ)	17.2	437	3.2	81	0.8	20	4.5	115	-	-
ABS-CTA14Q(WQ)(BQ)(WBQ)	17.2	437	3.2	81	0.8	20	4.5	115	-	-

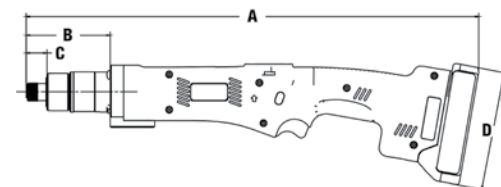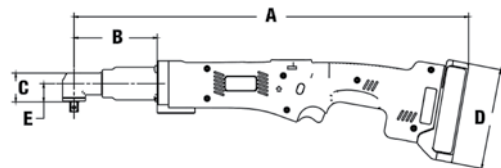

ACRADYNE SYSTEMS



MULTIPLE NUTRUNNING SYSTEMS

AIMCO can integrate the AcraDyne tool spindle into a customized Multiple Nutrunning system. From simple systems vertically suspended above the part, to assembly stations that integrate with your line, AIMCO can effectively accommodate your project.

LET US KNOW YOUR REQUIREMENTS AND WE WILL PROPOSE A SOLUTION TAILORED TO YOUR NEEDS.



FEATURES AND BENEFITS

- Nutrunner sequencing - Allows nutrunners to be sequenced at each phase of the tightening process, providing even distribution of torque and load to each fastener. This prevents part damage and distortion
- Snug threshold, final torque in one pass - No need for multiple torque stage sequencing. Fixtured nutrunners save time and effort
- No missed fasteners - Multiple nutrunners have a spindle dedicated to each location, ensuring quality on every rundown on every bolt
- Better residual torques - Synchronized controlled fastening allows residual torque levels to be consistent with the dynamic torque specification
- Saving in cycle time - Compared to using a single nutrunner tool with many rundowns, running all fasteners simultaneously reduces in-station cycle time
- Cost saving benefits - Saving installation cycle time frees operators to handle additional tasks and potentially reduce labor costs
- Collect data – Most common methods of collecting data for quality control and statistical analysis can be implemented from a serial data string using RS232 to formatted data from a network database

INDUSTRY APPLICATIONS

- Harvester chain-pull assembly, 2-spindle
- Engine flywheel assembly, 3-spindle
- Wheel lug nut assembly, 4-spindle
- Axle u-bolt assembly, 4-spindle
- Gasoline generator assembly, 6-spindle
- Lawn mower motor assembly, 7-spindle
- Air-cooled small vehicle engine assembly, 10-spindle

ACRADYNE HIGH TORQUE PNEUMATIC TOOLS

FEATURES AND BENEFITS

AcraDyne's High Torque Pneumatic Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners. Appropriate for use in industries requiring high torque capability, accuracy, power, and safety.

- Modular design allows for ease of maintenance
- Interchangeable motors and gearing
- Same proven and reliable gearbox as the AcraDyne DC line
- One-hand reverse



AAP1B66600A




AAP1B76950A



AAP1B772000A



AAP1B885100A

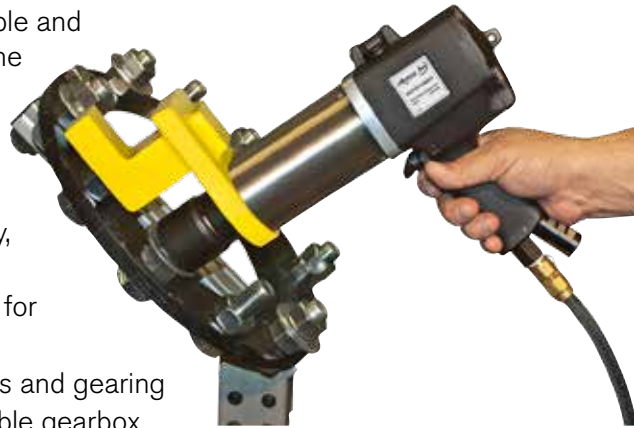

MODEL	TORQUE (Nm)	TORQUE (Ft-lb)	SPEED (rpm)	WEIGHT (lb)	SQUARE DR. (in)	AIR CONSUMPTION (CFM)
AAP1B66400A	400	300	57	9.75	3/4	22.9
AAP1B66600A	600	450	39	9.75	3/4	22.9
AAP1B66850A	850	625	27	9.75	3/4	22.9
AAP1B76950A	950	700	31	10.4	3/4	26.3
AAP1B771350A	1350	1000	22	10.4	1	26.3
AAP1B772000A	2000	1475	14	12.7	1	26.3
AAP1B772950A	2950	2175	9	14.9	1	26.3
AAP1B885100A	5100	3775	8	23	1-1/2	31.5

AIR PREPARATION UNITS

Many stacking filter/regulator combinations are available. See page 37 for options.



AFRL-4



AFRL-4HTA
Standalone Unit

28178
HT Air Tool/AFRL
Carrying Kit



ACRADYNE HIGH-SPEED SERIES HIGH TORQUE PNEUMATIC TOOLS

Our High-Torque Pneumatic High-Speed Series Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners with high torque capability, accuracy, power, and safety.

FEATURES AND BENEFITS

- Extremely fast rundown speed due to the dual motor design
- High torque output to weight ratio
- No reaction force due to the reaction bar and swivel gearbox
- Full swivel gearcase facilitates reaction bar positioning for ease of use and operator comfort
- Handle exhaust with low sound level
- Low air consumption compared to large motor frame type tools
- Uses the same durable and reliable gearbox from our DC line of high torque tools
- Modular design allows for easy maintenance
- One motor is used for all models in the range
- Two-piece handle construction enables flexible handle design
- Available in reversible and non-reversible models



AAP2B76950A



AAP2B771400A


MODEL	TORQUE (Nm)	TORQUE (Ft-lb)	SPEED (rpm)	WEIGHT (lb)	SQUARE DR. (in)
AAP2B76250A	250	185	660	10.5	3/4
AAP2B76450A	450	330	335	10.5	3/4
AAP2B76650A	650	480	223	10.5	3/4
AAP2B76950A	950	700	153	10.5	3/4
AAP2B771400A	1,400	1000	110	14.6	1
AAP2B772000A	2,000	1,475	63	14.8	1
AAP2B773000A	3,000	2,210	52	12.4	1
AAP2B785100A	4,800	3,540	26.5	19.7	1.5

ACRADYNE HT PNEUMATIC TOOL ACCESSORIES

Polyurethane Hose for HT Tools



- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility
- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature: -104°F to 175°F
- Working pressure: 100 PSI

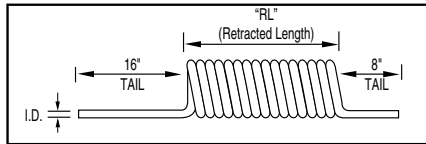

SINGLE AIR HOSE ASSEMBLIES (COILED)

MODEL	DESCRIPTION (O.D. x I.D. x LENGTH)	RETRACTED LENGTH	NPT FITTINGS
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	1/2"

Custom length coil assemblies and special colors available in minimum order quantities. Contact an AIMCO Customer Service Associate, 1-800-852-1368.



STRAIGHT AIR HOSE (SOLD PER FOOT)

ASH-500Z | 1/2" I.D.

Contact an AIMCO Customer Service Associate about full reel pricing, 1-800-852-1368.

Rubber Hose for HT Tools



- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature: -40°F to 190°F

SINGLE AIR HOSE (RUBBER)

I.D.	O.D.	LENGTH	WORKING PRESSURE	WEIGHT
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb

Custom lengths available. Contact an AIMCO Customer Service Associate for more details, 1-800-852-1368.

REACTION BARS

Tool includes standard, spline attachment reaction device. See page 25 for part numbers. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-800-852-1368.



Air Line Fittings



PLUGS

MODEL	DESCRIPTION
28161	1/2" x 1/4" MPT
28162	1/2" x 3/8" MPT
28163	1/2" x 1/2" MPT
28164	1/2" x 1/2" FPT



QUICK-CHANGE COUPLERS

MODEL	DESCRIPTION
27768	1/2" FPT
27769	1/2" MPT



PROTECTIVE COUPLER

MODEL	DESCRIPTION
27771	Vinyl



SWIVEL FITTING

MODEL	CAPACITY
500-SZ	1/2" NPT Swivel Fitting

AIR PREPARATION UNITS

AFRL STACKING FILTER/REGULATORS


Stacking filter/regulator combinations provide air filtration and precise regulation in a single unit for easy mounting and installation.

FEATURES AND BENEFITS


- All models include L-mount bracket, gauge, and metal bowl shields
- Polycarbonate filter and lubricator bowls (metal bowls standard on AFRL-8)
- 25-micron filter included on all models
- Regulating range: 7 – 125 PSI
- Custom order upgrade items include metal bowl, 5 micron filter, semi-automatic filter drain, and reduced PSI range regulator. Contact an AIMCO Customer Service Associate for more information, 1-800-852-1368



AFRL-2-C
AFRL-3-C

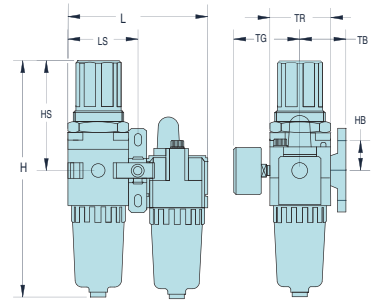

AFRL-3
AFRL-4
AFRL-8

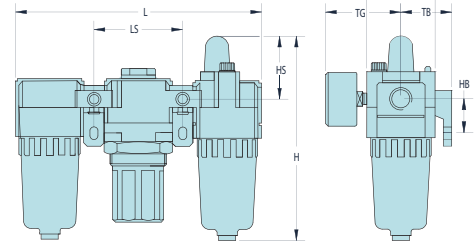


28178
HT Air Tool/AFRL
Carrying Kit



AFRL-4HTA
Standalone Unit

MODEL	PORT	GAUGE PORT	FLOW RATE CFM	FLOW RATE L/MIN	BOWL SHIELD	H IN/MM	HB IN/MM	HS IN/MM	L IN/MM	LS IN/MM	TB IN/MM	TG IN/MM	TR IN/MM
AFRL-2	1/4"	1/8"	70	2,000	yes	6.16 (156.5)	1.39 (35.3)	1.50 (38.1)	7.13 (181.1)	2.52 (64.0)	1.61 (41.0)	2.39 (60.7)	2.09 (53.1)
AFRL-2-C	1/4"	1/8"	60	1,700	yes	8.31 (211.1)	1.38 (35.1)	3.64 (92.5)	4.61 (117.1)	2.30 (58.4)	1.61 (40.9)	2.39 (60.7)	2.09 (53.1)
AFRL-3	3/8"	1/4"	140	4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-3-C	3/8"	1/4"	105	3,000	yes	10.31 (261.9)	1.57 (39.9)	4.41 (112.0)	6.06 (153.9)	3.03 (77.0)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-4	1/2"	1/4"	140	4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-8	1"	1/4"	180	5,000	yes	10.69 (271.5)	1.97 (50.0)	1.89 (48.0)	11.81 (300.0)	4.13 (104.9)	2.75 (69.9)	2.97 (75.4)	3.54 (89.9)

AIR PREPARATION UNITS: BASIC FUNCTIONS

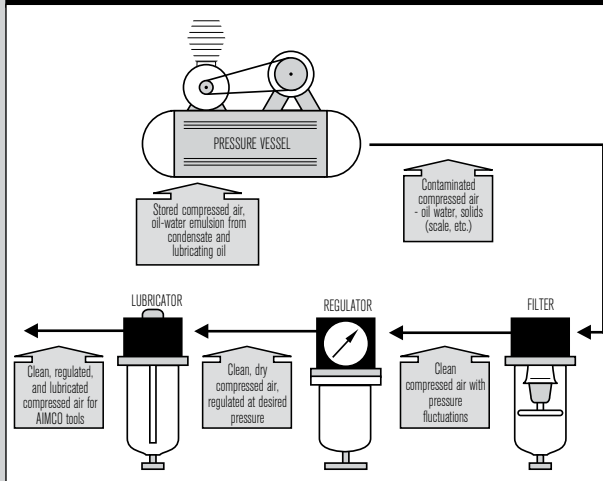

The supply of clean, dry air is essential to the operation of pneumatic powered tools. Use only clean filtered air for longer tool life. Provide proper airflow (CFM) and regulate air pressure (PSI) for optimum performance.

To determine unit size for application, you need to know:

- Total air flow (CFM) required for application
- Size of incoming air line and size of air line required by tool
- Air supply pressure (PSI)
- Allowable pressure drop
- Does the application require lubrication?
- Does the overall system have the required capacity?

GCI TORQUE REACTION ARMS

RUGGED FLEXIBILITY FOR EVEN THE MOST COMPLEX TORQUE APPLICATIONS



Carbon Fiber Arm

Constructed of durable aluminum, steel, or carbon fiber, GCI Torque Arms are available with multiple tool mounting options for application specifics. These highly ergonomic and user friendly arms are available in torque ranges of 150 Nm to 7,500 Nm and with reaches ranging up to 20 ft.

GCI arms can be designed as Smart Arms with encoders and intuitive PC-based AdaptiCS software. This complete Smart Arm system error-proofs even the most complex torque applications.

FEATURES AND BENEFITS

- Available in aluminum, steel, or carbon fiber
- Configurable installation: floor mount, wall mount, overhead mount, bench mount, or portable base
- Braking options: manual/automatic, discrete braking with verification, parking brakes, and electric/pneumatic actuation
- Tool holding options: fixed position, gimbal mount
- Integrated tool start/brake actuation capability: tool trigger start, remote tool start
- Smart Arm Capabilities:
 - Available with as many as six encoders to monitor all desirable tool positions relative to application
 - Intuitive, user-friendly AdaptiCS PC-based software that runs on an integrated industrial PC or on a customer supplied PC
 - Accepts easily scalable part images




Rugged tablet PC option for Smart Arm

MODEL	MAX. TORQUE	MAX. TOOL WEIGHT	MAX. REACH	MAX. VERTICAL TRAVEL	CONSTRUCTION
IPT SERIES - TORQUES TO 375 NM					
IPT150	150 Nm	12 lb	5 ft	30 in	Aluminum
IPT375	375 Nm	50 lb	6 ft	36 in	Steel
IP SERIES - TORQUES TO 4,000 NM					
IP4	550 Nm	30 lb	8 ft	48 in	Steel
IP5	1,000 Nm	50 lb	12 ft	60 in	Steel
IP7	3,000 Nm	100 lb	12 ft	60 in	Steel
IP8T	4,000 Nm	100 lb	12 ft	72 in	Steel
F SERIES - CARBON FIBER ARMS					
F70	70 Nm	10 lb	3 ft	18 in	Carbon Fiber Composite
F600	600 Nm	50 lb	20 ft	72 in	Carbon Fiber Composite
F1500	1,500 Nm	50 lb	20 ft	72 in	Carbon Fiber Composite
F3000	3,000 Nm	75 lb	20 ft	72 in	Carbon Fiber Composite
F7500	7,500 Nm	75 lb	12 ft	72 in	Carbon Fiber Composite

GCI TORQUE REACTION ARMS

FEATURES

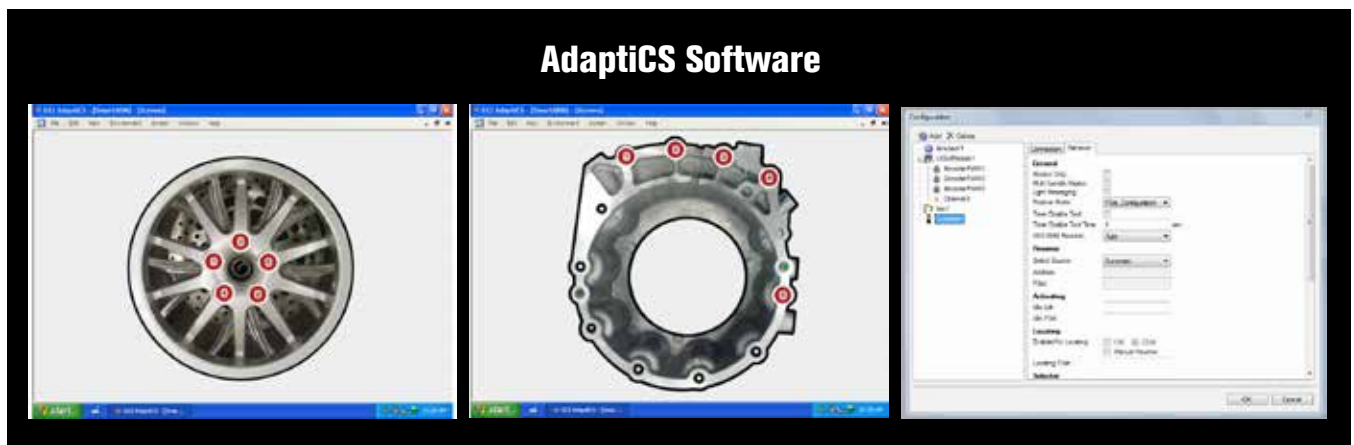

- Batch count capabilities
- Bidirectional arm articulation tracking
- Full torque/angle results display
- Integrates into any line control (PLC, MES, etc.)
- Multiple part locate strategies (1-point, 2-point, 3-point)
- Fully programmable dynamic display with integrated PC option
- Multiple rework strategies to fit customer requirements
- Integrates devices such as torque controllers via open protocol, encoded GCI torque reaction arms, scanners, vision cameras, and digital IO (pass/fail)
- AdaptiCS Enterprise (optional) provides full line control, interlocks, and data collection
- Runs on Windows 7, 8, and 10

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
A									
AAP1B66400A	34	AED4B898100B	22	AEF35170A(-2)(B-2)	17	AEN32015C(F)(DL)	15	AEP4(A)(R)(T)22020BR	21
AAP1B66600A	34	AEF35075A(V)(VB)(-2)		AEH32025C(-1,2)	19	AEN32025C(F)(DL)	15	AEP4(A)(R)(T)22030BR	21
AAP1B66850A	34	(B-2)	17	AEH32030C(-1,2)	19	AEN32030C(F)(DL)	15	AEP4(A)(R)(T)22040BR	21
AAP1B76950A	34	AEF35090A(V)(VB)(-2)		AEH32040C(-1,2)	19	AEN32040C(F)(DL)	15	AEP4A8X12000B	22
AAP1B771350A	34	(B-2)	17	AEH33042C(-1,2)	19	AEN33042C(F)	15	AEP4A66250B	22
AAP1B772000A	34	AEF35110A(V)(VB)(-2)		AEH33053C(-1,2)	19	AEN33053C(F)	15	AEP4A66425B	22
AAP1B772950A	34	(B-2)	17	AEH33060C(-1,2)	19	AEN33060C(F)(DL)	15	AEP4A66625B	22
AAP1B885100A	34	AEF35135A(V)(VB)(-2)		AEH33090C(-1,2)	19	AEN33090C(F)(DL)	15	AEP4A66925B	22
AAP2B76250A	35	(B-2)	17	AEH33120C(-1,2)	19	AEN33120C(F)(DL)	15	AEP4A771200B	22
AAP2B76450A	35	AEF35170A(V)(VB)	17	AEH33200C(-1,2)	19	AEN33200C(F)(DL)	15	AEP4A773000B	22
AAP2B76650A	35	AEF35280A(B)	17	AEH35140B(-1,2)	19	AEN33210C(F)(DL)	15	AEP4A884200B	22
AAP2B76950A	35	AEF35350A(B)	17	AEH35175B(-1,2)	19	AEN33300C(F)(DL)	15	AEP4A884200B1	22
AAP2B771400A	35	AEF35420A(B)	17	AEH4F12020B(-1,2)	19	AEN33375C(F)(DL)	15	AEP4A885000B	22
AAP2B772000A	35	AEF35515A(B)	17	AEH4F12026B(-1,2)	19	AEN35090B(F)	15	AEP4A896500B	22
AAP2B773000A	35	AEF35635A(B)	17	AEH35090B(-1,2)	19	AEN35140B(F)	15	AEP4A898100B	22
AAP2B785100A	35	AEF4A66250B	22	AEH35225B(-1,2)	19	AEN35175B(F)	15	AEP4(A)(B)66250BDL	24
AB-B1825LI	32	AEF4A66425B	22	AEH35285B(-1,2)	19	AEN35225B(F)	15	AEP4(A)(B)66425BDL	24
AB-B1850LI	32	AEF4A66625B	22	AEH35350B(-1,2)	19	AEN35285B(F)	15	AEP4(A)(B)66625BDL	24
AB-C18110	32	AEF4A66925B	22	AEJ4A8X12000B	22	AEN35350B(F)	15	AEP4(A)(B)66925BDL	24
AB-C18220	32	AEF4A771200B	22	AEJ4A66250B	22	AEN356540A	23	AEP4(A)(B)771200BDL	24
ABN-CTA10(W)(B)(WB)	31	AEF4A773000B	22	AEJ4A66425B	22	AEN3571000A	23	AEP4(A)(B)773000BDL	24
ABN-CTA12(W)(B)(WB)	31	AEF4A884200B	22	AEJ4A66625B	22	AEN3571600A	23	AEP4(A)(B)884200B1DL	24
ABN-CTA20(W)(B)(WB)	31	AEF4A884200B1	22	AEJ4A66925B	22	AEN3572600A	23	AEP4(A)(B)884200BDL	24
ABN-CTA30(W)(B)(WB)	31	AEF4A885000B	22	AEJ4A771200B	22	AEN4C12004B	12	AEP4(A)(B)885000BDL	24
ABN-CTA55(W)(B)(WB)	31	AEF4A896500B	22	AEJ4A773000B	22	AEN4C12009B	12	AEP4(A)(B)896500BDL	24
ABN-CTA90(W)(B)(WB)	31	AEF4A898100B	22	AEJ4A884200B	22	AEN4C12014B	12	AEP4(A)(B)898100BDL	24
ABN-CTA120(W)(B)(WB)	31	AEF4(A)(B)66250BDL	24	AEJ4A884200B1	22	AEN4C12018B	12	AEP4(A)(R)(T)12003B	
ABP-CTA11Q(WQ)(BQ)		AEF4(A)(B)66425BDL	24	AEJ4A885000B	22	AEN4C12022B	12	(V)(Q)	14
(WBQ)	31	AEF4(A)(B)66625BDL	24	AEJ4A896500B	22	AEN4C22015BM(F)	20	AEP4(A)(R)(T)12006B	
ABP-CTA14Q(WQ)(BQ)		AEF4(A)(B)66925BDL	24	AEJ4A898100B	22	AEN4F22030BM(F)	20	(V)(Q)	14
(WBQ)	31	AEF4(A)(B)771200BDL	24	AEJ4B8X12000B	22	AEN4F22037BM(F)	20	AEP4(A)(R)(T)12011B	
ABS-CTA11Q(WQ)(BQ)		AEF4(A)(B)773000BDL	24	AEJ4B66250B	22	AEN4F22044BM(F)	20	(V)(Q)	14
(WBQ)	31	AEF4(A)(B)884200B1DL	24	AEJ4B66425B	22	AEP35075AV(T)	14	AEP4(A)(R)(T)12014B	
ABS-CTA14Q(WQ)(BQ)		AEF4(A)(B)884200BDL	24	AEJ4B66625B	22	AEP35090AV(T)	14	(V)(Q)	14
(WBQ)	31	AEF4(A)(B)885000BDL	24	AEJ4B66925B	22	AEP35110AV(T)	14	AEP4(A)(R)(T)12018B(V)	14
AED4A66250B	22	AEF4(A)(B)896500BDL	24	AEJ4B771200B	22	AEP35135AV(T)	14	AEP4(A)(R)(T)12022B(V)	14
AED4A66425B	22	AEF4(A)(B)898100BDL	24	AEJ4B773000B	22	AEP35170AV(T)	14	AEP4(A)(R)(T)22020B(V)	14
AED4A66625B	22	AEF4(A)(B)8912000BDL	24	AEJ4B884200B	22	AEP35280A(T)	14	AEP4(A)(R)(T)22025B(V)	14
AED4A66925B	22	AEF4(A)(C)(X)12003B		AEJ4B884200B1	22	AEP35350A(T)	14	AEP4(A)(R)(T)22030B(V)	14
AED4A771200B	22	(B)(Q)	12	AEJ4B885000B	22	AEP35420A(T)	14	AEP4(A)(R)(T)22035B(V)	14
AED4A773000B	22	AEP4(A)(C)(X)12006B		AEJ4B896500B	22	AEP35515A(T)	14	AEP4(A)(R)(T)22040B(V)	14
AED4A884200B	22	(B)(Q)	12	AEJ4B898100B	22	AEP35635A(T)	14	AEP4B8X12000B	22
AED4A884200B1	22	AEP4(A)(C)(X)12011B		AEJ4B898100B	22	AEP4(A)(R)(T)12006BR	21	AEP4B66250B	22
AED4A885000B	22	(B)(Q)	12	AEL4A12003B(Q)	12	AEP4(A)(R)(T)12011BR	21	AEP4B66425B	22
AED4A896500B	22	AEP4(A)(C)(X)12014B		AEL4A12006B(Q)	12	AEP4(A)(R)(T)2025BR	21	AEP4B66625B	22
AED4A898100B	22	(B)(Q)	12	AEL4A12011B(Q)	12	AEP4(A)(R)(T)12014BR	21	AEP4B66925B	22
		AEP4(A)(C)(X)12022B(B)	12	AEL4A12014B(Q)	12	AEP4(A)(R)(T)12018BR	21	AEP4B771200B	22
				AEL4A12018B	12	AEP4(A)(R)(T)12018BR	21	AEP4B773000B	22
				AEL4A12022B	12	AEP4(A)(R)(T)12022BR	21		

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	
AEP4B884200B	22	AES4(A)(B)66250BDL		AMPST-8-IL	29	IP7	38	26630	25	
AEP4B884200B1	22	(L,R)	24	AMPST-8-U	29	IP8T	38	26700	28	
AEP4B885000B	22	AES4(A)(B)66425BDL		ASH-500C-15MSZ	36	IPT150	38	26709	28	
AEP4B896500B	22	(L,R)	24	ASH-500C-25MSZ	36	IPT375	38	26800	25	
AEP4B898100B	22	AES4(A)(B)66625BDL		ASH-500Z	36	Numerical				
AES32010C(V)(Q)	16	(L,R)	24	B - E			20322	30	26810	25
AES32020C(V)(Q)	16	AES4(A)(B)66925BDL		BJ10051	30	20400	30	26815	25	
AES32025C(V)(Q)	16	(L,R)	24	BJ10052	30	20712	29	26820	25	
AES32038C(V)	16	AES4(A)(B)771200BDL		BJ10053	30	20848	29	26830	25	
AES33040C(V)(-2)	16	(L,R)	24	BJ10054	30	20853	30	26840	25	
AES33060C(V)(-2)	16	AES4(A)(B)773000BDL		BJ10055	30	21159	29	26885	25	
AES33100C(V)(-2)	16	(L,R)	24	BJ10076	25	21208	29	26890	25	
AES33150CV	16	AES4(A)(B)884200B1DL		BJ10077	25	23575	29	26934	28	
AES33230C(V)(-2)	16	(L,R)	24	BJ10078	25	23662	29	27045	25	
AES33400C	16	AES4(A)(B)884200BDL		F			23730	30	27110	28
AES33600C	16	(L,R)	24	F70	38	24320	28	27115	28	
AES35075AV	16	AES4(A)(B)885000BDL		F600	38	24330	28	27122	28	
AES35090AV	16	(L,R)	24	F1500	38	24924	30	27200	25	
AES35110AV	16	AES4(A)(B)896500BDL		F3000	38	25265	30	27210	28	
AES35135AV	16	(L,R)	24	F7500	38	25274	25	27255	25	
AES35170AV	16	AES4(A)(B)898100BDL		G - H			25275	25	27348	28
AES35280A	16	(L,R)	24	Gen IV ACE Controller	4	25276	25	27370	28	
AES35350A	16	AES33150C-2	16	I - Z			25277	25	27594	29
AES35420A	16	AES33230C-2	16	iAC4E	8	25278	25	27768	36	
AES35515A	16	AET32020C(DL)	18	iAC4EG	8	25289	25	27769	36	
AES35635A	16	AET32025C(DL)	18	iAC4EGV	8	25291	25	27771	36	
AES4A12003B(V)(Q)	12	AET32035C(DL)	18	iAC4ES	8	25350	28	27791	29	
AES4A12006B(V)(Q)	12	AET32050C(DL)	18	iAC4ESG	8	25491	28	27816	30	
AES4A12011B(V)(Q)	12	AET4A12025B-KD	18	iAC4ESGV	8	25501	29	28161	36	
AES4A12014B(V)(Q)	12	AET4AA12018B	18	iAC4ESR	8	25518	28	28162	36	
AES4A12018BV	12	AET4AB12025B	18	iAC4ESRG	8	25646	28	28163	36	
AES4A12022BV	12	AFRL-4	34, 37	iAC4ESRGM	8	25717	30	28164	36	
AES4A22020BVM	20	AFRL-4HTA	34, 37	iAC4ESRV	8	25718	30	28178	34, 37	
AES4A22025BVM	20	AFRL-2	37	iAC4ESV	8	25843	30	28292	28	
AES4A22030BVM	20	AFRL-2-C	37	iAC4EV	8	26327	25	28475	29	
AES4A22040BVM	20	AFRL-3	37	iAC4EV	8	26328	25	28489	30	
AES4A66250B	22	AFRL-3-C	37	iBC4E	9	26332	25	28514	25	
AES4A66425B	22	AFRL-8	37	iBC4EG	9	26336	25	28549	25	
AES4A66625B	22	AMPST-2-I	29	iBC4EGV	9	26337	25	28796	36	
AES4A66925B	22	AMPST-2-U	29	iBC4EV	9	26364	28	28843	17, 29	
AES4A771200B	22	AMPST-4-I	29	iEC4E	8	26443	30	28859	30	
AES4A773000B	22	AMPST-4-U	29	iEC4EG	8	26477	25	30300	25	
AES4A884200B	22	AMPST-6-I	29	iEC4EGV	8	26478	25	30351	30	
AES4A884200B1	22	AMPST-6-U	29	iEC4EV	8	26479	25	500-SZ	36	
AES4A885000B	22	AMPST-6S-I	29	IP4	38	26568	29			
AES4A896500B	22	AMPST-6S-U	29	IP5	38	26570	30			
AES4A898100B	22	AMPST-8-I	29			26594	28			

AIMCO CORPORATE HEADQUARTERS

10000 SE Pine Street
Portland, Oregon 97216
Phone: (503) 254-6600
Toll Free: 1-800-852-1368

AIMCO CORPORATION DE MEXICO SA DE CV

Ave. Cristobal Colon 14529
Chihuahua, Chihuahua. 31125
Phone: (01-614) 380-1010
Fax: (01-614) 380-1019

AIMCO SOUTH AMERICA

Carrera 29A, #7B-91.
Origami Building. Int604.
Medellin; Colombia 050021

AIMCO EUROPE

Dibao Plaza Avenida Río Gallo, 431
19174 Galápagos - Guadalajara
Spain
Phone: +34 673 34 99 25

AIMCO CHINA

Room 607, No. 3998 Hongxin Rd
Minhang District, Shanghai
China
Phone: 0086-21-34319246
Fax: 0086-21-34319245

